CONSTRUCTION NOTES:

PROJECT SCOPE

1. INSTALL CONDUIT, BASES AND PITS AS SHOWN.
2. INSTALL SERVICE AND GROUND ROD ON WOOD POLE #5 AS SHOWN. INSTALL MAST AND DISCONNECT ON XX QUADRANT. INSTALL WEATHER HEAD 150mm LOWER THAN THE LOWEST HYDRO WIRE. TOTAL LENGTH OF SERVICE CABLE: 50m.
5. INSTALL LOW FLASHERS AT HEIGHT OF 2.6m (8'–6") ABOVE THE BASE. PEDESTRIAN SIGNS TO BE 4' BELOW LOW FLASHERS.
6. INSTALL EQUIPMENT AS SHOWN.
7. TIMINGS REQUIRED. CROSSING TIME FOR NORTH CROSSWALK: 13 SECONDS, SOUTH CROSSWALK: 13 SECONDS.

PROJECT COORDINATION

1. COORDINATE WORK WITH (CA's NAME), (204) XXX–XXXX.
2. COORDINATE HYDRO SERVICE INSTALLATION WITH PHILLIP BRUCE, (204) 360–3073. RE: JUTA PERMIT No. B27634.

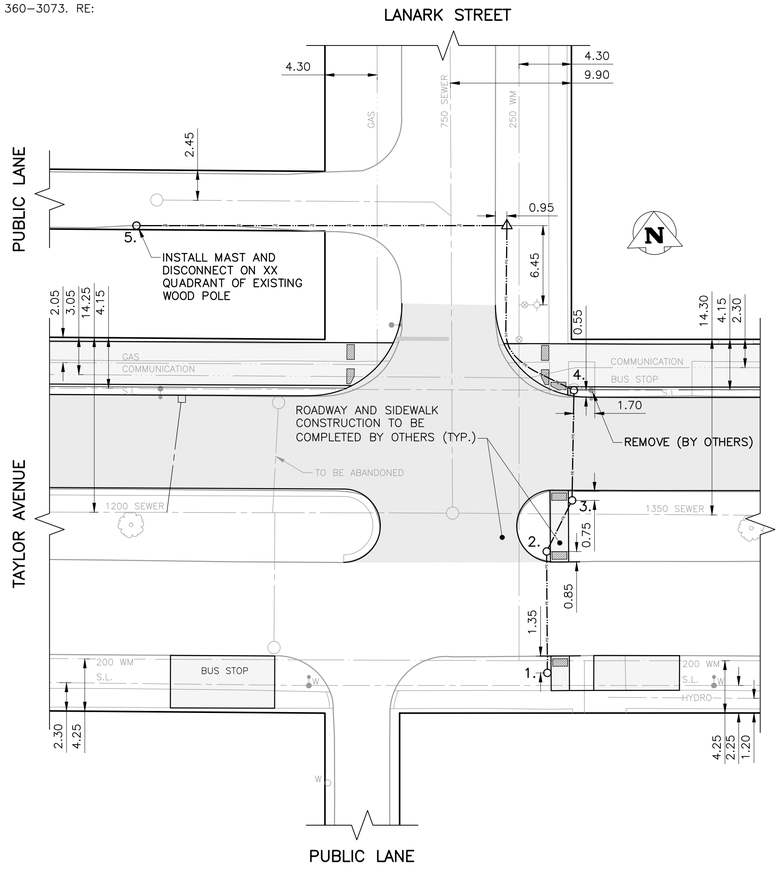

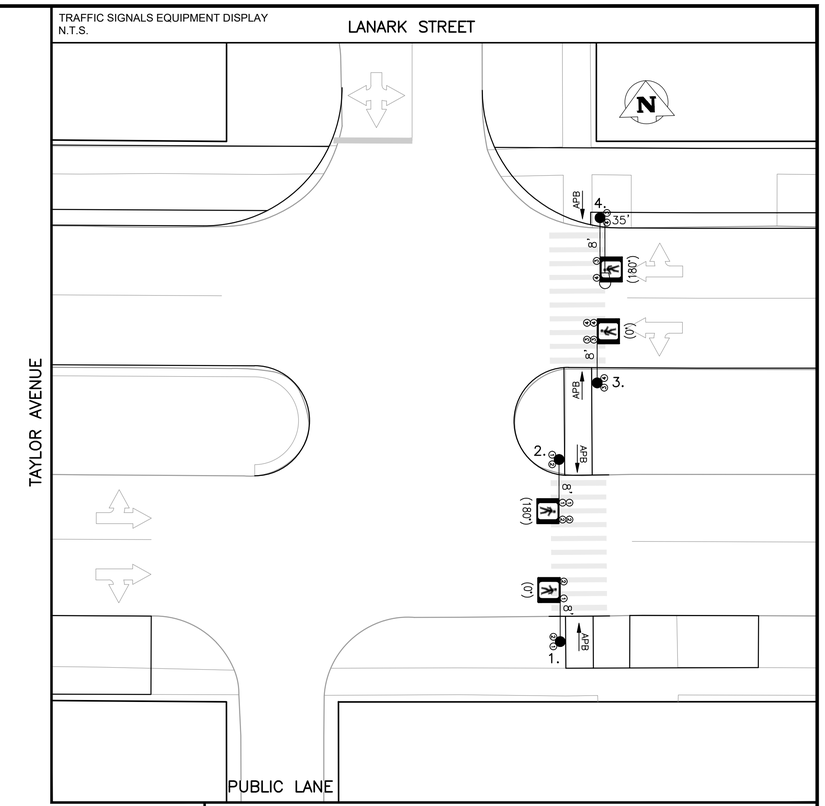

EQUIPMENT DISPLAY LEGEND

EXISTING — PROPOSED (AS SHOWN BELOW)

PEDESTRIAN HEAD WITH PCS; VEHICLE DETECTION AREA; TRAFFIC SIGNAL HEAD; 12' LOW ARM (SHOWN FROM CENTRE) HIGH ARM (SHOWN FROM SIDE)

PEDESTRIAN CORRIDOR BOX; TRAFFIC SIGNAL POLE; APS SINGLE DIRECTION; PUSH BUTTON & DIRECTION (APB = AUDIBLE PB); RED FLASHER; LUMINAIRE

RRFB (PHASE "A" OR "B"); WOOD POST; APS DUAL DIRECTION (2 SEPARATE SPEAKERS); ELECTRONIC DISPLAY; AMBER FLASHER (1/2/3/4 = CIRCUIT NUMBER); CAMERA

NO.	EQUIPMENT LIST	ARM	BASE	B.B.
1.	35' SIGNAL FOR 150 WATT (15000 LUMEN) LUMINAIRE	8'	OD	DD
2.	CANTILEVER	8'	OD	DC
3.	CANTILEVER	8'	OD	DC
4.	CANTILEVER	8'	OD	DC
5.	HYDRO WOOD #0014462			
	SERVICE:			

NO.	EQUIPMENT LIST	ARM	BASE	B.B.

TRAFFIC SIGNALS UNDERGROUND LEGEND

EXISTING — PROPOSED (AS SHOWN BELOW)
ABANDONED — DISCONNECTED (LOOPS ONLY)

1 1/2" PE CONDUIT; 2" PE CONDUIT; 4" PVC CONDUIT; AERIAL / BURIED CABLE; CONDUIT STUB; BREAK-IN; SPLICE; SAW-CUT LOOPS; PREFORMED LOOPS

POLE BASE; WOOD POST; CONTROLLER BASE; PEDESTAL BASE; TERMINAL BASE; SERVICE BOX (PIT); 24" PRECAST PIT; 30" PRECAST PIT; 36" PRECAST PIT; REMOVAL

SIGNAL BASE BOLT SQUARE TYPES

BOLT SQUARE (B.S.) DIA.

TYPE "A" - 8 1/8"
TYPE "B" - 6 3/4"
TYPE "C" - 8 1/8" SCREW TYPE
TYPE "D" - 12 3/4", 1 1/4" DIA. BOLTS, 24" DIA.
TYPE "OD" - 12 3/4", 1 1/4" DIA. BOLTS, 28" DIA.
TYPE "POD" - 12 3/4", PRECAST, 1 1/4" DIA. BOLTS, 28" DIA.
TYPE "E" - 9 9/16" SCREW TYPE
TYPE "F" - 9 9/16"
TYPE "G" - 8 1/8", 1 1/4" DIA. BOLTS, 89mm PROJ.
TYPE "GS" - 8 1/8", 1 1/4" DIA. BOLTS, 76mm PROJ.
TYPE "PG" - 8 1/8", PRECAST, 1 1/4" DIA. BOLTS
TYPE "H" - 9 7/8" SCREW TYPE
TYPE "I" - 7 3/4"
TYPE "J" - 10 5/8", 1 1/4" DIA. BOLTS
TYPE "K" - 10 5/8", PRECAST, 1 1/4" DIA. BOLTS
TYPE "L" - 6", 5/8" DIA. BOLTS
TYPE "PM" - 8 1/8", PRECAST, 5/8" DIA. BOLTS

INTERNAL REVIEW

TIMINGS (INITIAL):	NEW TIMINGS?	DATE	INITIALS
TIMINGS (PRE-IFC):	NEW TIMINGS?	DATE	INITIALS
OPERATIONS:	DAYS REQUIRED	DATE	INITIALS
UNDERGROUND CONSTRUCTABILITY:	DAYS REQUIRED	DATE	INITIALS
LAB:	REQUIRE IFC DWG? / DAYS REQUIRED	DATE	INITIALS
TMC:		DATE	INITIALS
STREET LIGHTING:		DATE	INITIALS
TRAFFIC MANAGEMENT:		DATE	INITIALS

PLAN VIEW: UNDERGROUND CONSTRUCTION

1:250

EXISTING	LEGEND	PROPOSED	EXISTING	LEGEND	PROPOSED	EXISTING	LEGEND	PROPOSED
150 WM	WATERMAIN	150 WM		PROPERTY LINE		TELEPHONE	TELEPHONE	TELEPHONE
	HYDRANT			ROADWAY		COMMUNICATION	COMMUNICATION	COMMUNICATION
	VALVE			SIDEWALK			WOOD POLE	
	SHUTOFF VALVE			CURB & CURB RAMP			STREET LIGHT	
300 SEWER	SEWER	300 SEWER		WARNING TILE			BANNER POLE	
	MANHOLE			CULVERT			RAILWAY POLE	
	CATCH BASIN			BUILDING			GUY-WIRE	
	CURB INLET			TREE			FENCE	
HYDRO	HYDRO	HYDRO	100 GAS	GAS	100 GAS		GUARDRAIL	

UNDERGROUND STRUCTURES

PENDING
UNDERGROUND STRUCTURES ID — DATE (YYYY/MM/DD)

PENDING
WATER & WASTE REVIEW ID

NOTE:
LOCATIONS OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

CONSTRUCTION REVISIONS

NO.	REVISION	DATE (YYYY/MM/DD)	BY
A	ISSUED FOR INTERNAL REVIEW	2024/03/27	A.B.

A.B. — DESIGNED BY
A.B. — DRAWN BY
C.H. — CHECKED BY
APPROVED BY

ACCOUNTS:
PENDING

LIABILITY DISCLAIMER NOTICE:
THE DIGITAL INFORMATION PROVIDED FOR YOUR CONVENIENCE HEREIN IS FOR USE AT YOUR OWN RISK. THE CITY OF WINNIPEG, PUBLIC WORKS DEPARTMENT, SHALL ASSUME NO RESPONSIBILITY FOR THE INFORMATION AND IT SHOULD NOT BE CONSTRUED AS ASBUILT INFORMATION. THE INFORMATION SHOULD BE USED FOR PLANNING PURPOSES ONLY AND SHOULD BE VERIFIED BY SURVEY. THE DEPARTMENT SHALL NOT IN ANY WAY SUFFER ANY LIABILITY WHATSOEVER TO ANY PARTY FOR INJURY, LOSS OR DAMAGES SUFFERED BY SUCH PARTY ARISING FROM THEIR USE OF, OR RELIANCE UPON, THIS INFORMATION.

ENGINEER'S SEAL:

PRELIMINARY
NOT FOR CONSTRUCTION

Winnipeg

THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT
TRANSPORTATION DIVISION

PEDESTRIAN CORRIDOR
LANARK ST. & TAYLOR AVE.

UNITS:
ALL DIMENSIONS ARE IN METERS UNLESS OTHERWISE NOTED

DRAWING NUMBER:
S-2203

V:\Traffic Signals\01 Intersections\01 Pending\Lanark & Taylor S-2203\02 Design\Preliminary Lanark & Taylor S-2203.dwg