

Typical Fastening Bar




Typical Roof Edge Detail




Note: Modified Bitumen stipping used in conjunction with 4 ply felt membrane is to have base sheet extend 12" onto flat and cap sheet 18" onto flat.

Typical Parapet Construction

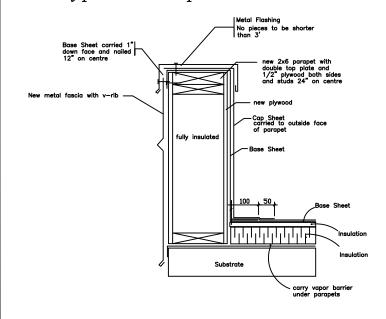

Plumbing Vent Flashing

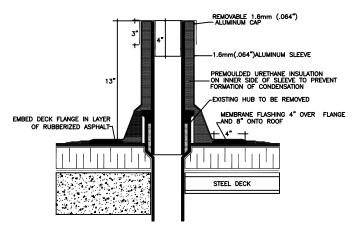

SJ-20 ALUMINUM STACK JACK (13") HIGH

AGASSIZ CONSULTING GROUP

809 Pipeline Road, Winnipeg, Manitoba Phone: 697-8091 Fax: 697-8039

^{tt:} West Kildonan Memorial Arena 346 Perth Avenue Winnipeg, MB

Date: January 11, 2011

Drawing No

File no: 3675-11

Scale: N.T.S.