


NOTES:

1. CONTRACTOR TO OBTAIN UTILITY CLEARANCES PRIOR TO COMMENCING EXCAVATION.
2. EARTHFILL MATERIAL SHALL CONSIST OF EITHER SUITABLE SITE MATERIAL OR CLAY BORROW MATERIAL AS APPROVED BY THE CONTRACT ADMINISTRATOR.
3. WITHIN THE N-S LIMITS OF THE TENSION CRACK:
 - i) EXCAVATE TO 0.5 METRES BELOW THE TENSION CRACK AND 4.0 METRES WIDE.
 - ii) TAPER THE WEST EDGE AT A 3:1 SLOPE.
 - iii) PLACE AND COMPACT SUITABLE EARTHFILL MATERIAL INTO THE 4.8 METRE WIDE TRENCH.
 - iv) EXCESS BACKFILL MATERIAL MAY NOT BE PLACED AT THE TOE OF THIS SLOPE. EXCESS MATERIAL MAY BE PLACED AT THE NE OR NW QUADRANTS AT THE TOE OF THE SLOPE AS DETERMINED BY THE CONTRACT ADMINISTRATOR.
 - v) PLACE 75 TOPSOIL AND SOD.
4. REPAIR ANY DAMAGE TO THE ADJACENT AREAS OF THE SITE CAUSED BY THE CONSTRUCTION ACTIVITIES TO THE SATISFACTION OF THE CONTRACT ADMINISTRATOR.

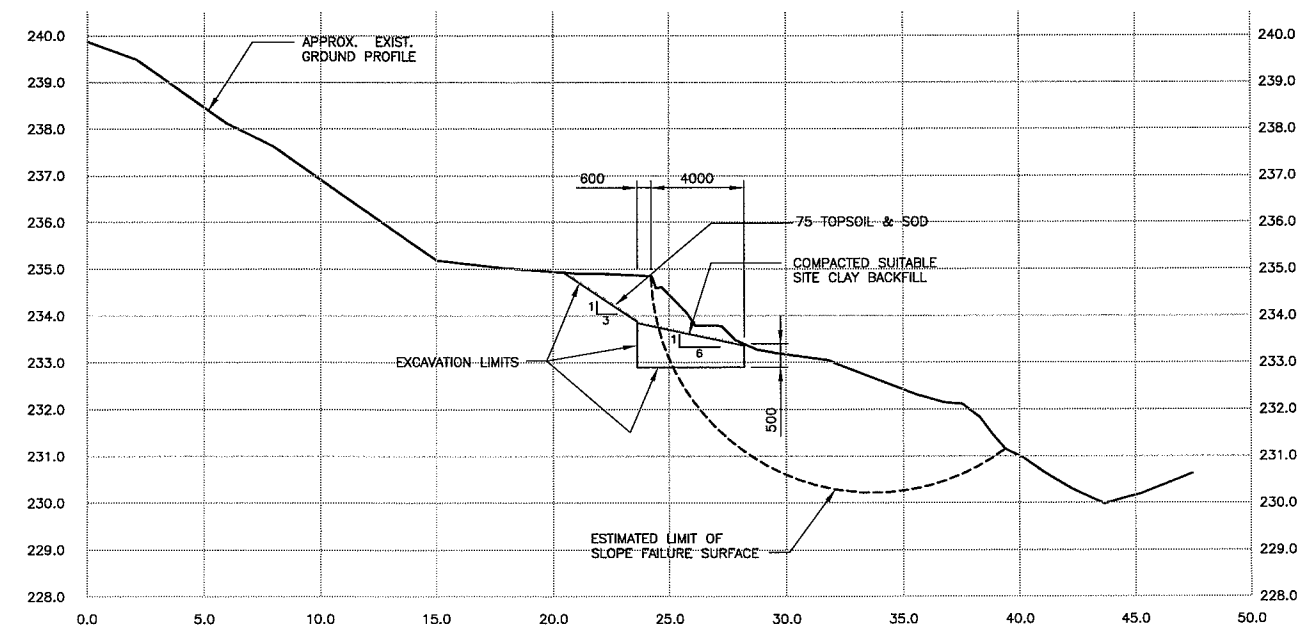

DRAWING REDUCED
NOT TO SCALE

WARNING
CONTRACTOR TO OBTAIN UTILITY CLEARANCES PRIOR TO COMMENCING EXCAVATION.

UNDERGROUND INFORMATION SHOWN ON THIS DRAWING IS BASED ON INFORMATION RECEIVED FROM THE CITY OF WINNIPEG UNDERGROUND STRUCTURES AND MAY NOT BE ENTIRELY ACCURATE OR COMPLETE.

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

B.M. ELEV.	DESIGNED BY	MRD	
	DRAWN BY	MRD	
	CHECKED BY	AOD	
	REVIEWED BY	RAW	
2	ISSUED FOR TENDER	07/04/27 MRD	
1	ISSUED FOR CITY REVIEW	07/04/23 MRD	
0	ISSUED FOR CITY REVIEW	07/04/12 MRD	
NO.	REVISIONS	DATE	BY

ENGINEER'S SEAL
A.O. DRYE
REGISTERED PROFESSIONAL ENGINEER

ENGINEER'S SEAL
R.A. WIEBE
REGISTERED PROFESSIONAL ENGINEER

PROVINCE OF MANITOBA

DILLON CONSULTING

RELEASED FOR CONSTRUCTION

DATE

CONSULTANT PROJECT NO.
06-5919-07-7519

THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT

Winnipeg

2007 BRIDGE MAINTENANCE
ROUTE 20 AT KEEWATIN OVERPASS

SE QUADRANT - SOUTH FAILURE
CRACK HEALING REPAIR

CITY DRAWING NUMBER
B123-07-04

SHEET 4 OF 4

BID OPP NO.
295-2007