

WARNING


IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:

1. NOTIFY THE GAS COMPANY OF THE PROPOSED

- LOCATION OF EXCAVATION.
- 2. TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS SEE PROVINCIAL
- REGULATION 210/72 FOR DETAILS.
- 3. OBTAIN EXCAVATION PERMITS PRIOR TO CONSTRUCTION

CONSTRUCTION.											

	150 mm WM	WATERMAIN	150 mm WM		HYDRO		-x - x	FENCE	- X - X		B.M.							PROFESSIONAL'S SEAL
		HYDRANT	+		MTS	· ·	0	TEST HOLE		UNDERGROUND STRUCTURES	ELEV.			URBAN DESIGN DIVISION			PRELIMINARY	
<u></u>	8	VALVE	•		GRANULAR			ASPHALT PATH									G & DEVELOPMENT	
	300 mm LDS	LAND DRAINAGE SEWER	300 mm LDS		LIMIT OF ASPHALT					SUPV. U/G STRUCTURES DATE								
× [2]	250 mm WWS	WASTE WATER SEWER	250 mm WWS		CURB RENEWAL					COMMITTEE			_					1]
Jec	0	MANHOLE	•		ASPHALT								_			PRD		
		CATCH BASIN		31.000	ELEVATIONS	(99.892)				NOTE:			_				БТ	
	Δ	CURB INLET			PROPERTY LINE					LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION			_		DRAWN BY	PRD	APPROVED RGZ	NOT FOR CONSTRUCTION
	\$	HYDRO POLES		+	SURVEY BAR	+				AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR			_					
li fi	∽	LAMP STANDARD		4	CURB STOP	•				THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT	1	ISSUED FOR TENDER	16/06/20		HOR. SCALE:	AS SHOWN	RELEASED FOR CONSTRUCTION	CONSULTANT PROJECT NUMB
	<u> </u>	GAS			RAMP CURB					LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.	0	ISSUED FOR REVIEW	16/06/08	PRD	VERTICAL:	AS SHOWN		. NI/A
÷ L	EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PLAN	PROPOSED		NO.	REVISIONS	YY/MM/DE	ВY	DATE	16/06/08	DATE	· N/A

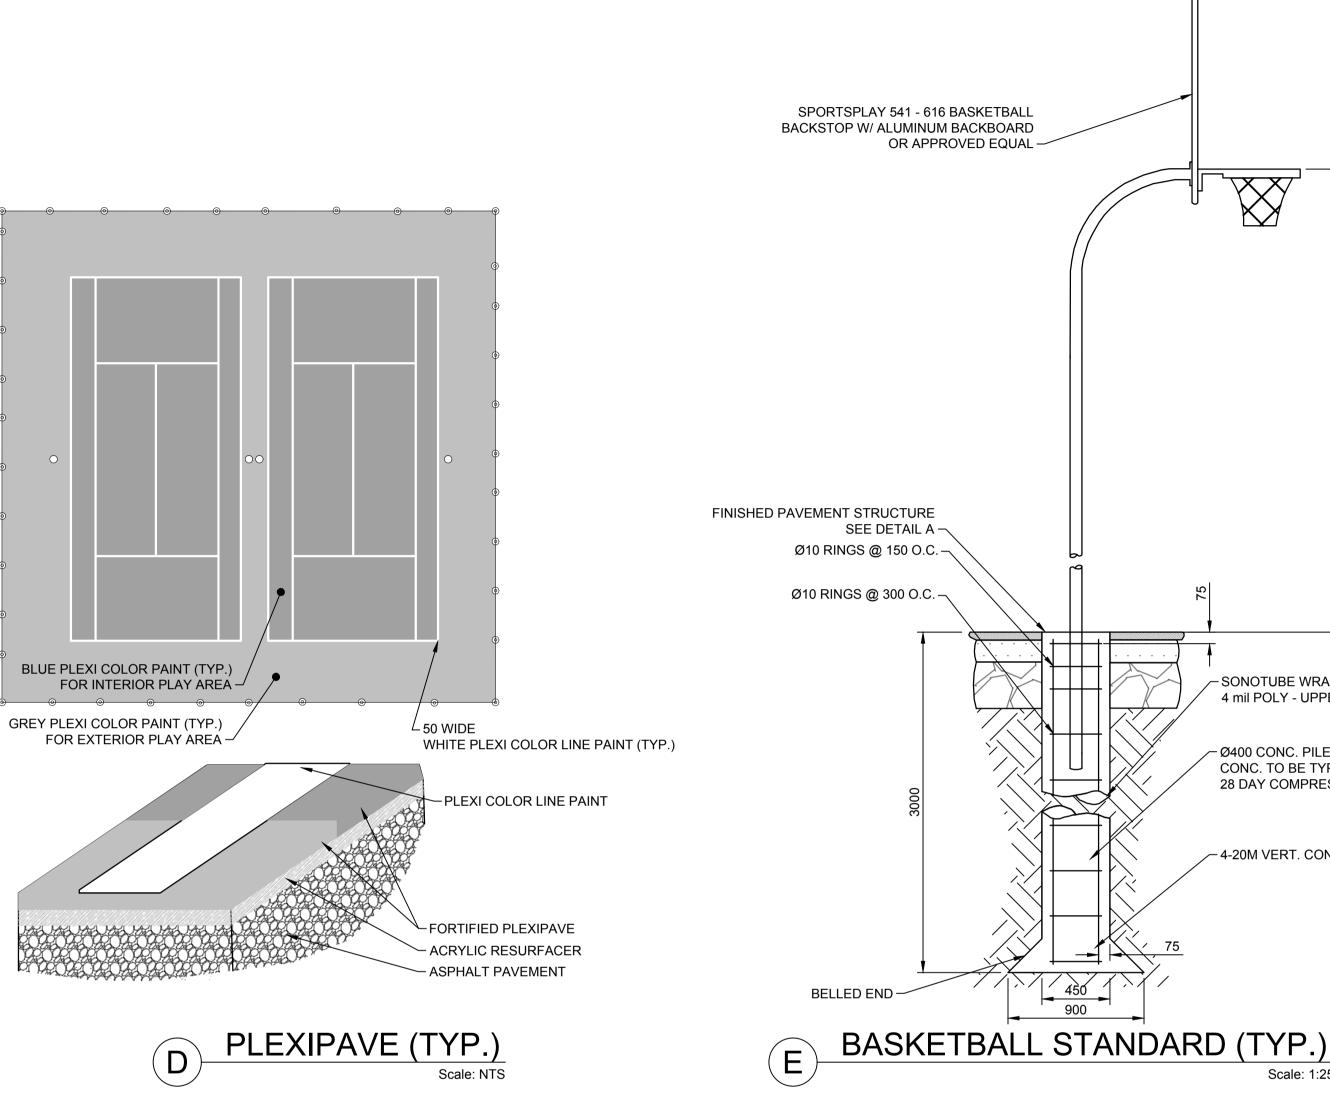



- 1. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS, PAY ALL NECESSARY FEES AND GIVE ALL NECESSARY NOTICES.
- 2. REMOVE SURROUNDING FENCE AND POSTS AROUND RECONSTRUCTION. REINSTALL FENCE AND NEW POSTS
- SURROUNDING RECONSTRUCTION. 3. CONTRACTOR SHALL TAKE PRECAUTIONARY STEPS TO PROTECT EXISTING TREES WITHIN THE LIMITS OF ACTIVITIES AS OUTLINED IN THE SPECIFICATIONS
- 4. CONTRACTOR TO CONFIRM THE LOCATION OF ALL
- UTILITIES/SERVICES IN THE FIELD PRIOR TO CONSTRUCTION 5. THE CONTRACTOR SHALL PROVIDE CONSTRUCTION LAYOUT
- THROUGHOUT THE PROJECT. 6. THE CONTRACTOR SHALL MAINTAIN ONE SET OF PLANS ON SITE IN WHICH THE CONTRACTOR SHALL CLEARLY NOTE ALL AS-BUILT INFORMATION AS THE PROJECT PROGRESSES
- 7. PLEXIPAVE SURFACING AND COLOR LINE PAINTING SHALL BE APPLIED IN ADHERENCE TO MANUFACTURERS DIRECTIONS AND SPECIFICATIONS.
- 8. RESTORATION OF THE SITE TO EQUAL OR BETTER CONDITION TO BE COMPLETED IMMEDIATELY FOLLOWING CONSTRUCTION ACTIVITIES AT CONTRACTORS EXPENSE.
- 9. INSTALL TEMPORARY FENCING AROUND CONSTRUCTION AREAREPLACEMENT OF FENCE POSTS TO BE DETERMINED BY AND DIRECTED BY THE CONTRACT ADMINISTRATOR

- SONOTUBE WRAPPED WITH 2 LAYERS OF 4 mil POLY - UPPER 2.30 OF PILE

0

32

∽Ø400 CONC. PILE CONC. TO BE TYPE 50 SULPHATE RESISTENT 28 DAY COMPRESSIVE STRENGTH OF 30 MPa

- 4-20M VERT. CONT.



WHOLE NUMBERS INDICATE MILLIMETRES DECIMALIZED NUMBERS INDICATE METRES

