


Playstructure - Type I - A - Mirror Image
 Playstructure - Type I - B- As Shown

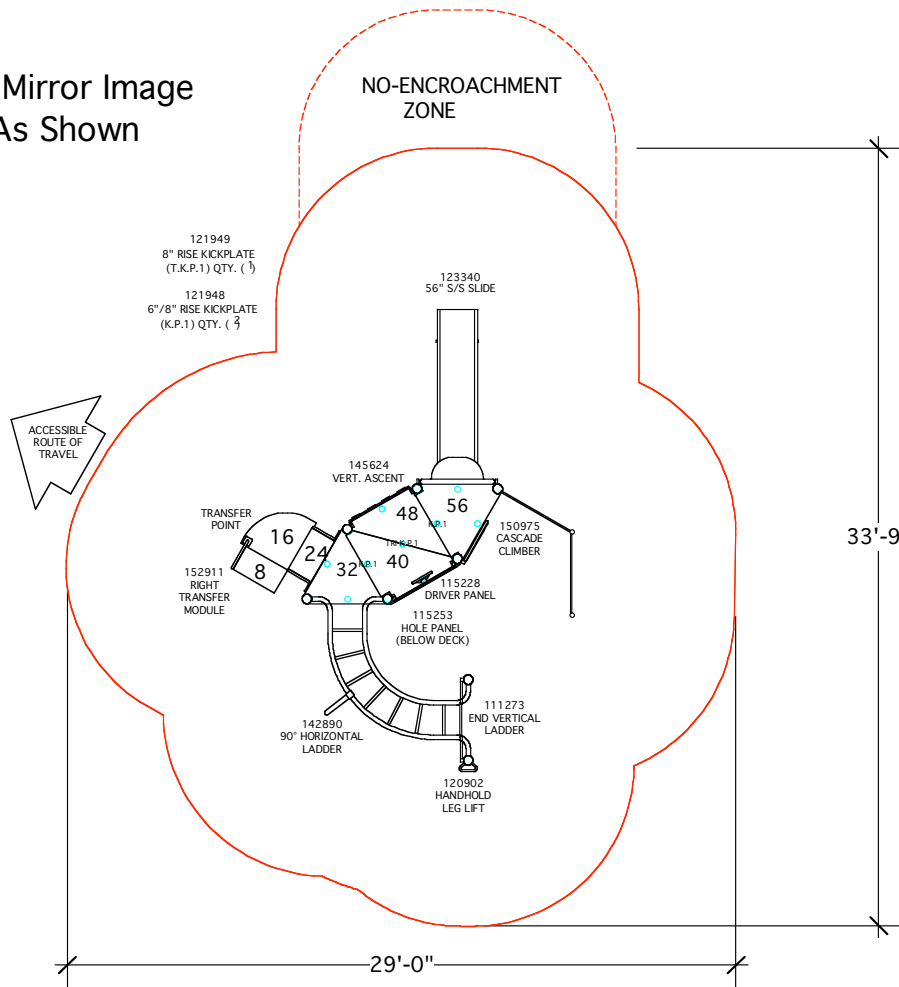

TOTAL ELEVATED PLAY COMPONENTS 5	0	REQUIRED	0
TOTAL ELEVATED COMPONENTS ACCESSIBLE BY RAMP	0	REQUIRED	3
TOTAL ELEVATED COMPONENTS ACCESSIBLE BY TRANSFER	5	REQUIRED	2
TOTAL ACCESSIBLE GROUND LEVEL COMPONENTS SHOWN	4	REQUIRED	2
TOTAL DIFFERENT TYPES OF GROUND LEVEL COMPONENTS	2	REQUIRED	2

NOTE: 7' USE ZONES

landscape structures

IPEMA CERTIFIED

IT IS THE MANUFACTURER'S OPINION AND INTENT THAT THE DESIGN AND LAYOUT OF THESE COMPONENTS CONFORM WITH THE CANADIAN STANDARD FOR PLAYGROUND SAFETY (CSA Z614-98).

The play components identified on this plan are IPEMA certified. The use and layout of these components conform to the requirements of ASTM F1487.

THE FALL HEIGHT OF THE SPACENET IS BASED ON THE CAN/CSA Z614-98 STANDARD SECTION 15.14.5.

THIS PLAY AREA & EQUIPMENT IS DESIGNED FOR AGES 2-12 YEARS

IT IS THE MANUFACTURER'S OPINION THAT THIS PLAY AREA DOES CONFORM TO THE A.D.A. ACCESSIBILITY GUIDELINES (ADAG), ASSUMING AN ACCESSIBLE PROTECTIVE SURFACING IS PROVIDED, AS INDICATED, OR WITHIN THE ENTIRE USE ZONE.

THIS CONCEPTUAL PLAN WAS BASED ON INFORMATION AVAILABLE TO US. PRIOR TO CONSTRUCTION, DETAILED SITE INFORMATION INCLUDING SITE DIMENSIONS, TOPOGRAPHY, EXISTING UTILITIES, SOIL CONDITIONS, AND DRAINAGE SOLUTIONS SHOULD BE OBTAINED, EVALUATED, & UTILIZED IN THE FINAL DESIGN.

PLEASE VERIFY ALL DIMENSIONS OF PLAY AREA, SIZE, ORIENTATION, AND LOCATION OF ALL EXISTING UTILITIES, EQUIPMENT, AND SITE FURNISHINGS PRIOR TO ORDERING.

SLIDES SHOULD NOT FACE THE HOT AFTERNOON SUN.

CHOOSE A PROTECTIVE SURFACING MATERIAL THAT HAS A CRITICAL HEIGHT VALUE OF AT LEAST THE HEIGHT OF THE HIGHEST ACCESSIBLE PART/FALL HEIGHT OF THE ADJACENT EQUIPMENT. (REF. CONSUMER PRODUCT SAFETY COMMISSION (CPSC) GUIDELINES, SECTION 10: SURFACING.)


AREA OF PROTECTIVE ACCESSIBLE PROTECTIVE SURFACING TO BE A COMBINATION OF UNITARY AND LOOSE FILL MATERIALS.
 @ DEEP

IT IS THE MANUFACTURER'S OPINION THAT THIS PLAYSTRUCTURE CONFORMS TO THE CALIFORNIA CODE OF REGULATIONS TITLE 22, DIVISION 49, CHAPTER 22.

IT IS THE MANUFACTURER'S OPINION AND INTENT THAT THE LAYOUT OF THESE COMPONENTS CONFORM WITH THE U.S. CONSUMER PRODUCT SAFETY COMMISSION'S (CPSC) "HANDBOOK FOR PUBLIC PLAYGROUND SAFETY".

DESIGNED BY:
 GDW
 COPYRIGHT: 7-31-07
 LANDSCAPE STRUCTURES, INC.
 601 7th STREET SOUTH - P.O. BOX 198
 BELAND, MINNESOTA 55328
 PH: 1-800-328-0035 FAX: 1-763-972-6091

Date	Previous Drawing #	Initials



NORTH ARROW

Playstructure - Type I

PLAYGROUND-R-US
 JODI MARR

SYSTEM TYPE:
 PLAYBOOSTER
 DRAWING #:
 19540-2-1

