


TITLE

GUIDELINES FOR THE PLANTING OF TREES ON TURF-COVERED BOULEVARDS


DRAWING # 1

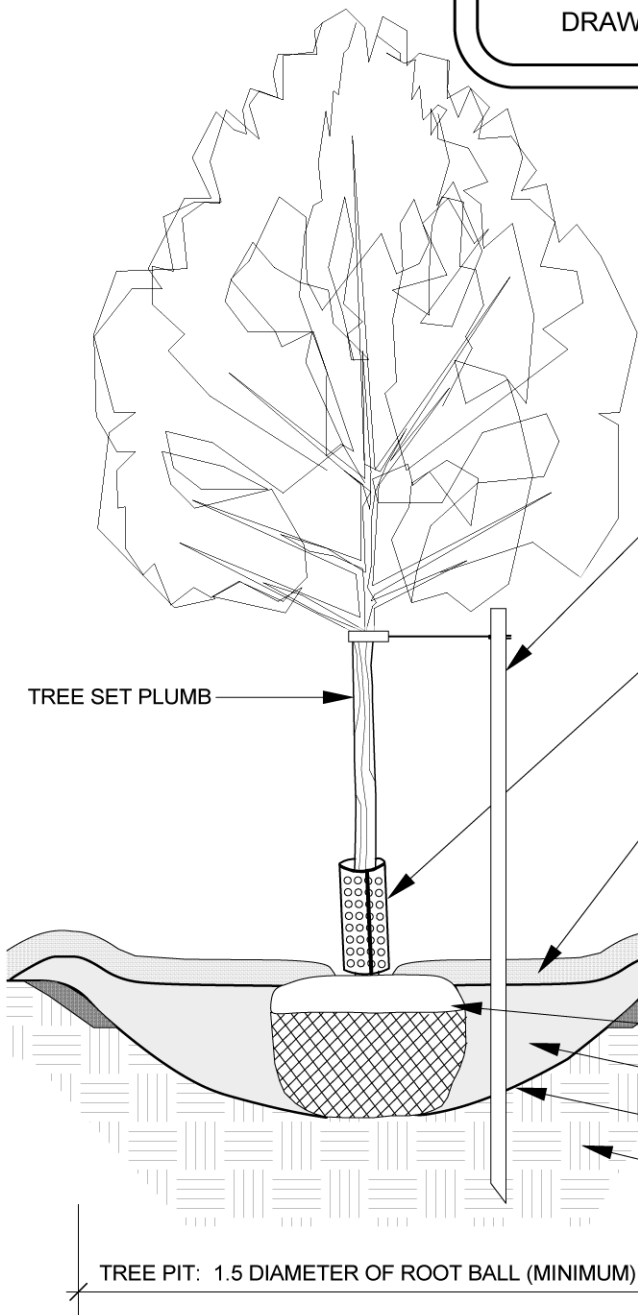

SECTION 1a

PIT TO BE DUG WITH BACKHOE NOT TREE SPADE

NOT TO SCALE
MARCH 2008 SP

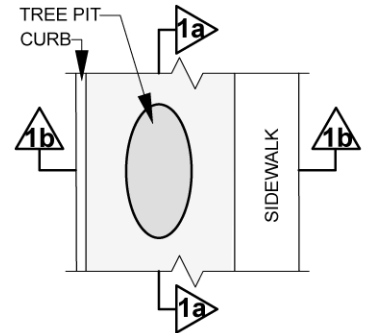

PLAN VIEW

METAL "T" STAKE ON ONE OR TWO SIDES AND GUYING STRAP (WHERE REQUIRED)

TREE GUARD: 100mm DIA. x 600mm LENGTH WEeping TILE MATERIAL SLICED AND WRAPPED AROUND BASE OF TREE

WOOD CHIP MULCH (100mm DEPTH)

BERM FORMING WATER DISH USING SOIL AROUND THE OUTSIDE EDGE OF THE ROOT BALL

EXISTING FINISHED GRADE


SCARIFY SIDES OF TREE PIT TO THE DEPTH OF ONE SHOVEL BLADE

CUT AND REMOVE WIRE BASKET AND BURLAP FROM TOP 1/3 OF ROOT BALL. REMOVE ALL TWINE

TAMPED SOIL MIX

TREE PIT SLOPING TO APPROXIMATE WIDTH OF ROOT BALL AT BASE

UNDISTURBED SUBGRADE

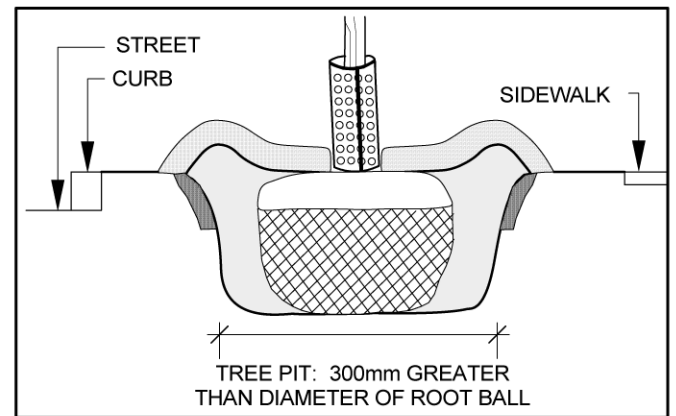

SECTION 1b

THE CITY OF WINNIPEG
Planning, Property and Development Department
Planning and Land Use Division
Unit 15 - 30 Fort Street, Winnipeg, MB, R3C 4X5

