
Typical Seeding for Berms & Drains

Shoal Lake Aqueduct Right of Way Maintenance

City

of Winnipeg M12.87 to 26.5

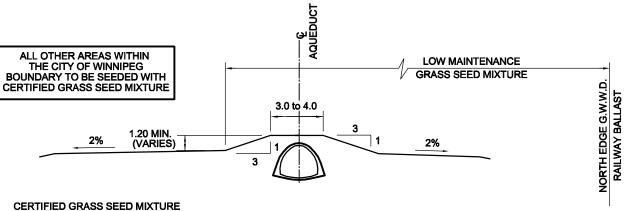

15% ALGONQUIN ALFALFA 15% ROAMER, RAMBLER OR RANGELAND ALFALFA 5% MEADOW FESQUE (CANADA #1) 10% BROMEGRASS (CANADA #1) 25% CREEPING RED FESCUE (CANADA #1) 10% BIRDSFOOT TREFOIL (CREE or LEO) 20% TIMOTHY (CANADA #1)

Saved By: kberard

- all grass seed must be certified, pre-mixed and pre-innoculated in 15 kg bags

COVER CROP

- if seeded in May use oats
- if seeded during fall use Fall Rye **GRANULAR FERTILIZER**

- 11-52-0 or equivalent
- Seed using Press Drill

SEEDING RATES

- Grass seed 35kg/ha
- Cover Crop 56kg/ha
- Fertilizer 90kg/ha

LOW MAINTENANCE GRASS SEED MIXTURE

30% KENTUCKY BLUEGRASS 26% CREEPING RED FESCUE 13% BEAUMONT MEADOW FESCUE 9% PERENNIAL RYEGRASS 9% ALSIKE CLOVER **4% LEO BIRDSFOOT TREFOIL**

- 9% WHITE DUTCH CLOVER - the trefoil and clover seed are to be inoculated with their required rhizobium
- all seed are to be certified Canada No. 1 having minimum purity of 97 percent. SEEDING RATES: Grass seed 115kg/ha