

David Wagner Associates Inc.
 4 - 430 River Avenue Winnipeg, Manitoba, R3L 0C6 (204) 452-2426
 LANDSCAPE ARCHITECTURE • URBAN DESIGN • GOLF COURSE ARCHITECTURE

NOTES
 Location of underground structures as shown are based on the best information available but no guarantee is given that all existing utilities are shown or that the given locations are exact. Confirmation of existence and exact location of all services must be obtained from the individual utilities before proceeding with construction.

DO NOT SCALE - DRAWING PLOT MAY NOT BE AT 100%

NO.	REVISION	DATE	BY
8			
7			
6			
5			
4			
3			
2			
1			

RELEASED FOR CONSTRUCTION	DATE: XX Month, 20XX
CLIENT	



PROJECT


**BCI II - OLD KILDONAN WARD
 RENOVATION OF SPORT COURTS**

DRAWN BY	CL/LLW	DATE	June 16, 2011
APPROVED BY	Approved By	SCALE	1:200 Metric

DRAWING TITLE

**MAPLES SITE
 REMOVALS PLAN**

PROJECT NO.	SHEET NO.	REVISION NO.
1017_M	L2	0

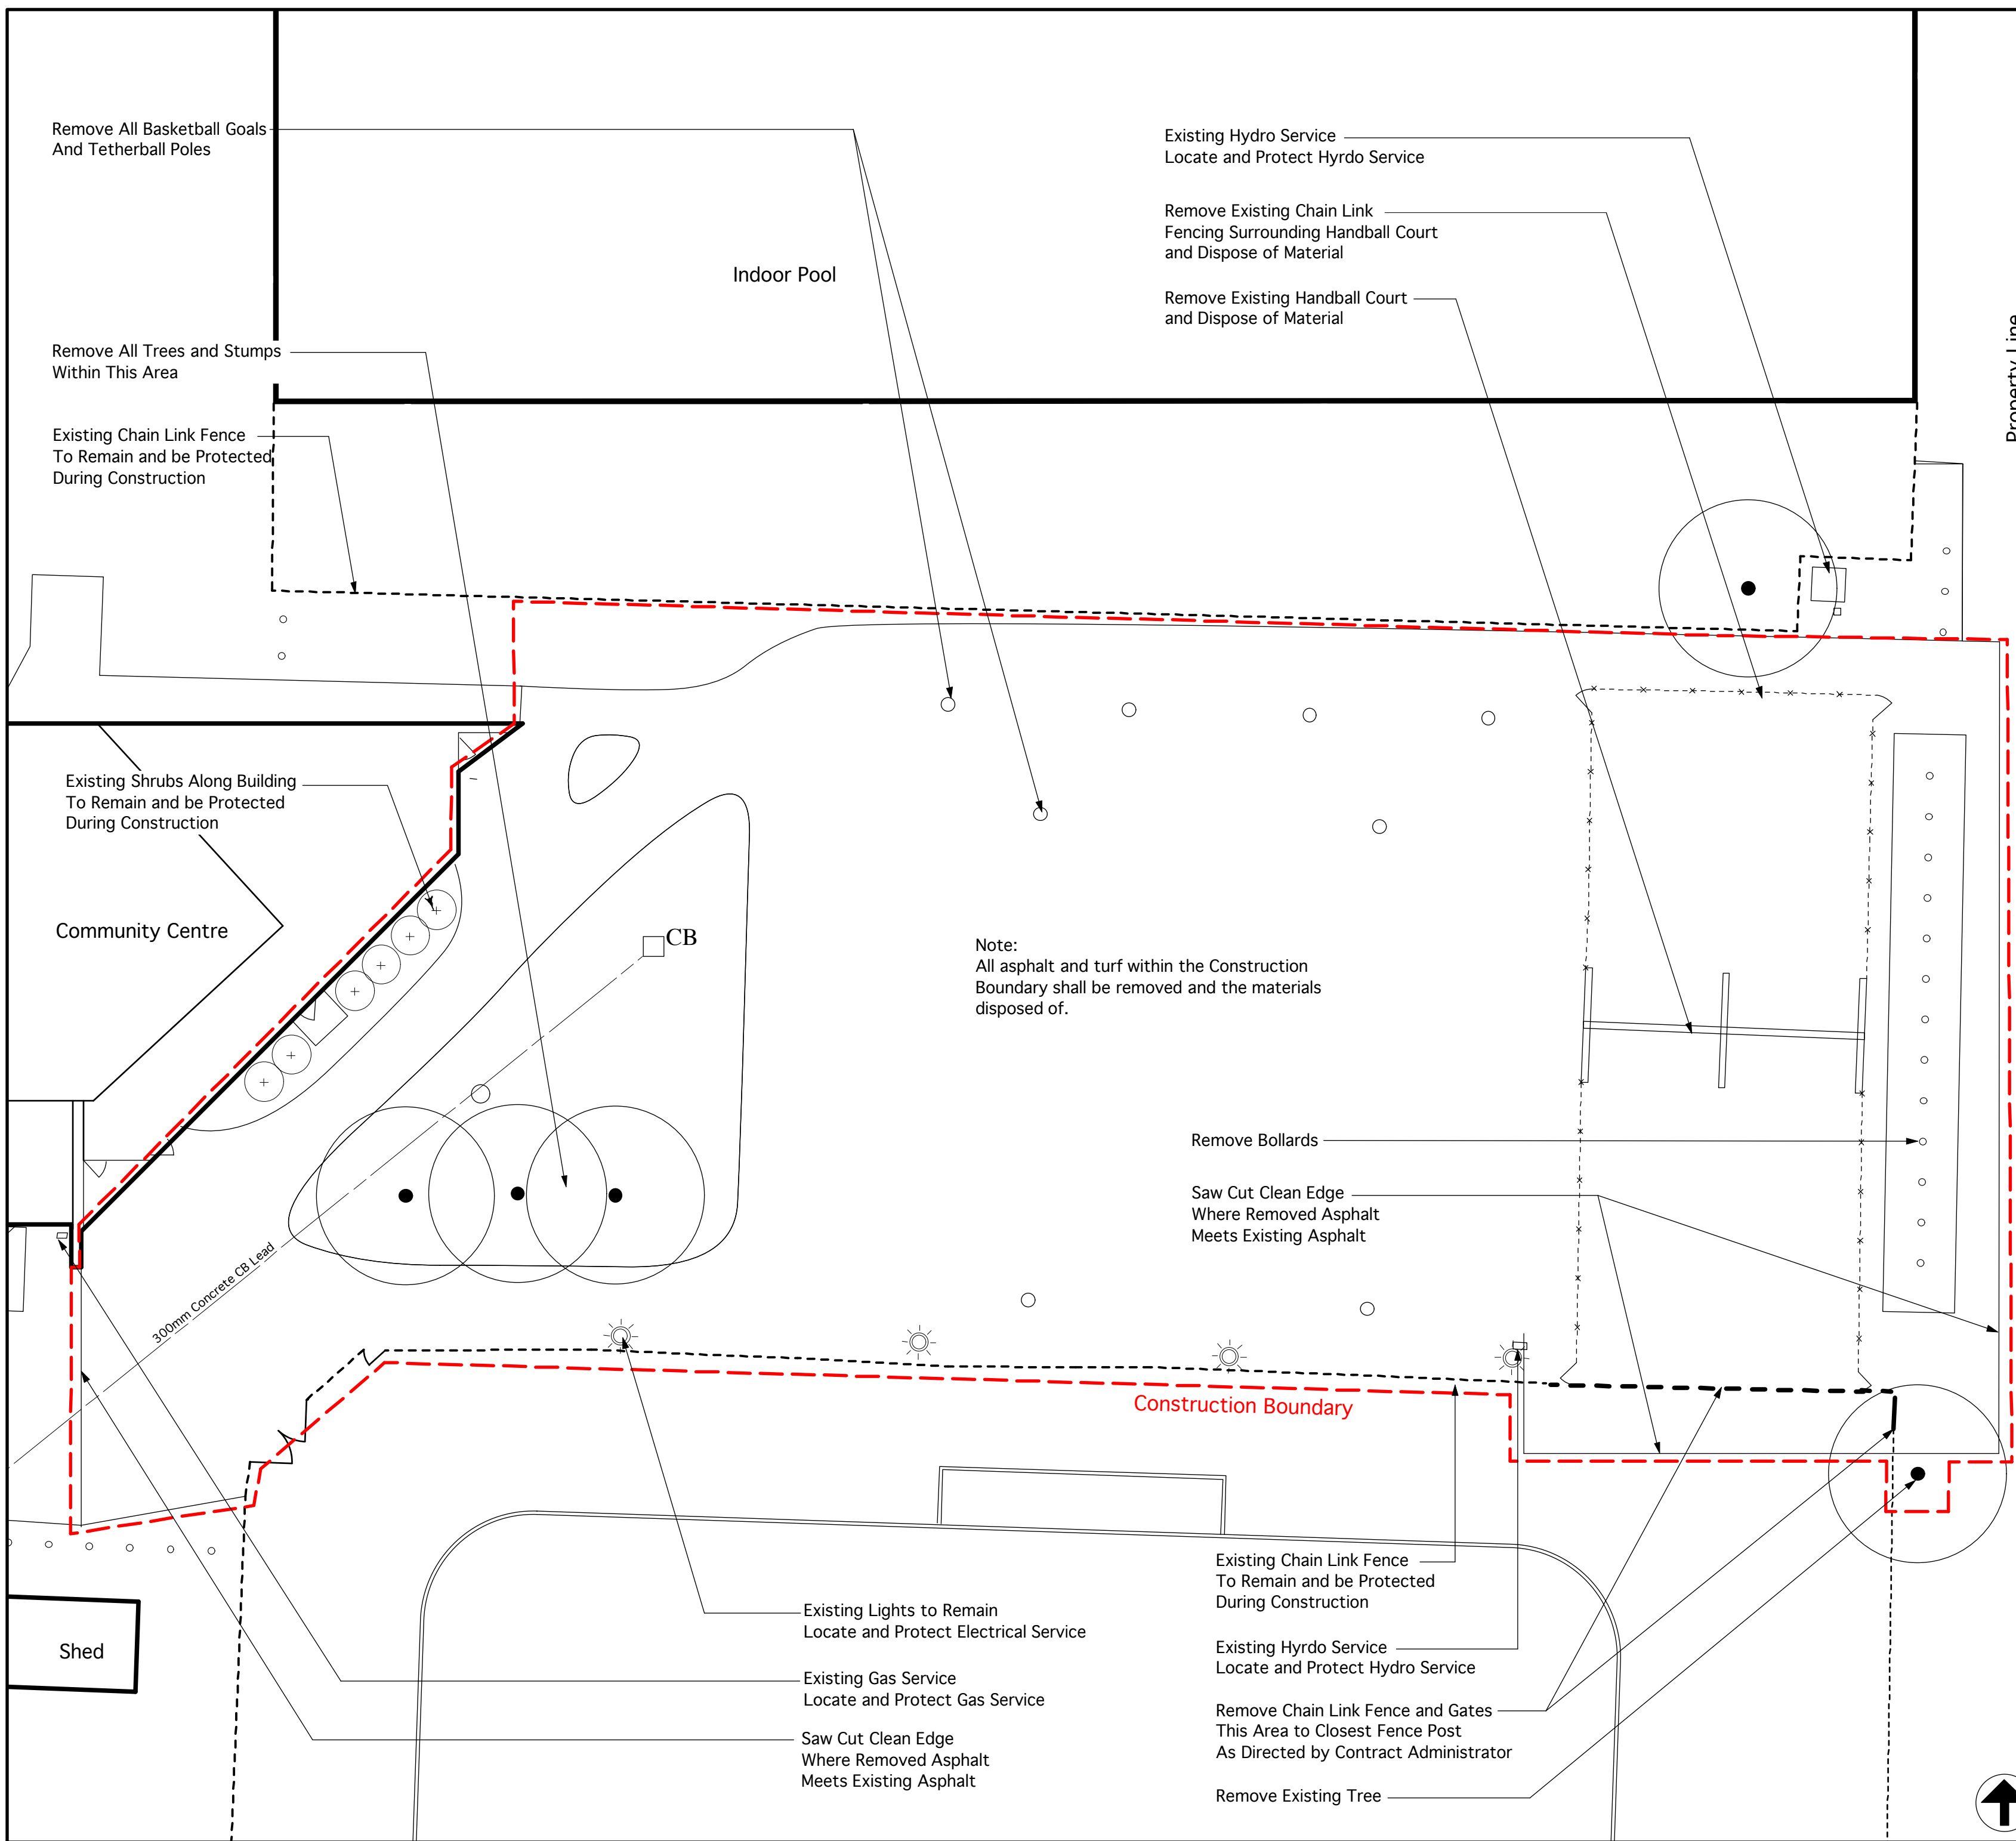

Remove All Basketball Goals
 And Tetherball Poles

Remove All Trees and Stumps
 Within This Area

Existing Chain Link Fence
 To Remain and be Protected
 During Construction

Existing Shrubs Along Building
 To Remain and be Protected
 During Construction

Community Centre

Shed

Indoor Pool

CB

Note:
 All asphalt and turf within the Construction
 Boundary shall be removed and the materials
 disposed of.

Construction Boundary

Existing Hydro Service
 Locate and Protect Hyrdo Service

Remove Existing Chain Link
 Fencing Surrounding Handball Court
 and Dispose of Material

Remove Existing Handball Court
 and Dispose of Material

Remove Bollards

Saw Cut Clean Edge
 Where Removed Asphalt
 Meets Existing Asphalt

Existing Lights to Remain
 Locate and Protect Electrical Service

Existing Gas Service
 Locate and Protect Gas Service

Saw Cut Clean Edge
 Where Removed Asphalt
 Meets Existing Asphalt

Existing Chain Link Fence
 To Remain and be Protected
 During Construction

Existing Hyrdo Service
 Locate and Protect Hydro Service

Remove Chain Link Fence and Gates
 This Area to Closest Fence Post
 As Directed by Contract Administrator

Remove Existing Tree

Property Line

