

ADHESIVE MOUNT POLYCARBONATE SNOW GUARDS, 4 ROWS SPACED PER MANUFACTURER'S RECOMMENDATION. OFFSET 6" BETWEEN ALTERNATE VALLEYS - TYP.

4" x 4" PRE-FIN METAL GABLE TRIM

8" WIDE PRE-FIN METAL FASCIA W/ DRIP OVER 3/4" PLYWD BACK

PRE-FIN PERFORATED METAL SOFFIT W/ ALL ACCESSORIES & TRIM REQUIRED. PROVIDE STRAPPING AS NECESSARY - TYP.

PRE-FIN METAL J-TRIM AROUND GABLE VENT BRICK MOULD - TYP.

PRE-FIN 22" OCTAGONAL ALUM GABLE VENT W/ INSECT SCREENS - TYP.

TYPICAL - WRAP GABLE VENT OPENINGS WITH "FLEX-WRAP" MEMBRANE FLASHING - TIE INTO TYVEK AIR BARRIER

4" WIDE PRE-FIN HORIZONTAL METAL TRIM - BOTTOM TO LINE UP WITH ROOF OVERHANG SOFFIT LINE - SEE DETAIL 3/A-15

PROVIDE PRE-FIN METAL CLOSURE TRIM

1 3/4" x 6" CLEAR ANOD. ALUM HEAD FRAME

PRE-FIN METAL CLAD SCREEN WALL BEYOND

1 3/4" x 4 1/2" CLEAR ANOD. ALUM MULLIONS SET IN 1 3/4" x 6" CLEAR ANOD. PERIMETER ALUM FRAME

1 3/4" x 6" CLEAR ANOD. ALUM SILL SECTION

PRE-FIN METAL SILL FLASHING LAP OVER PARGING & EXTEND UNDER PRIVACY SCREEN FRAME - TYP.

CEMENT PARGING ON GALV. EXPANDED METAL LATH MECHANICALLY FASTENED THRU RIGID INSULATION TO CONG.

2" RIGID INSULATION OVER COMPATIBLE MASTIC DAMP PROOFING MECHANICALLY FASTENED TO CONG SLAB - TYP.

3" THICK HORIZONTAL RIGID INSULATION AROUND THICKEN EDGE CONG. SLAB. SLOP AWAY @ 2% - TYP. (INSTALL IN TWO 1 1/2" LAYERS WITH JOINTS STAGGERED & PEGGED)

2 x 6 LADDER - SEE STRUCT

2 x 6 GABLE END WALL


LINE ROUGH OPENING W/ BITUTHENE MEMBRANE - TYP.

1

WALL SECTION @ PRIVACY SCREEN

A-13

SCALE 1" = 1'-0"

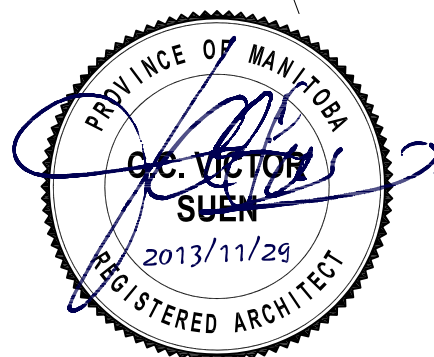

Victor Suen Architect

COMFORT STATION FOR WINNIPEG TRANSIT

23 Stormont Drive, Winnipeg, MB R3V 1L9
email: victorsuenarchitect@mts.net
Ph (204) 228-0230 Fax (204) 261-6341

WALL SECTION AT ENTRANCE THRU PRIVACY SCREEN

SCALE: 1/2" = 1'-0"
DATE: 2013/06/20

REV. 0 13/11/29 ISSUED FOR TENDER & CONSTRUCTION

A-13

Rev. 0