

## POWER AND SYSTEMS DEMOLITION NOTES: ""x""


ALSO SEE NOTES & SPECIFICATIONS.

REFER TO APPLICABLE RENOVATION DRAWING FOR RELOCATED COMPONENTS. ALL ABANDONED CABLES TO BE REMOVED AS REQUIRED BY LATEST CANADIAN ELECTRICAL CODE. DO NOT DISTURB OR DISCONNECT ANY WIRING & CABLING IN AREA OF WORK REQUIRED FOR OTHER AREAS.

- 1. REMOVE ALL COMPONENTS WITH DESIGNATION "D" BACK TO SOURCE , UNLESS OTHERWISE NOTED.
- 2. REMOVE & DISCONNECT ALL MECHANICAL EQUIPMENT (CONDUIT, WIRING, SUPPORTS, ELECTRICAL BOXES, STARTER, DISCONNECT, TIMER, RESET) BACK TO SOURCE INCLUDING INTERLOCKS TO ASSOCIATE EQUIPMENTS.
- 3. EXISTING CEILING LUMINARIES TO REMAIN, UNLESS OTHERWISE NOTED.
- 4. EXISTING LIGHT SWITCHES TO REMAIN. EXCEPT WALL MOUNTED LIGHT SWITCHES DESIGNATED FOR WALL DEMOLITION & BRANCH CIRCUIT CONNECTED TO NON-DEMOLITION AREA - CIRCUITS TO REMAIN & LIGHT SWITCH DEVICE BOX TO BE TEMPORARY SUPPORTED.
- 5. REMOVE PAINT BOOTH LUMINAIRES & LIGHT SWITCH BACK TO SOURCE.
- 6. RELOCATE ELECTRIC HOT WATER HEATER CIRCUIT TO NEW LOCATION, SEE MECHANICAL DRAWING.
- REMOVE ALL ELECTRICAL SURFACE MOUNTED COMPONENTS ON WALL BACK TO SOURCE IN AREA SHOWN. THERMOSTATS TO BE RELOCATED AS PER MECHANICAL DRAWINGS.
- 8. ALL FIRE DETECTION/PREVENTION DEVICES TO REMAIN (E.G., CEILING HEAT DETECTORS, SMOKE DETECTORS, FIRE ALARM PULL STATIONS, COMBINATION HORN STROBES, EMERGENCY LIGHTING).

ABBREVIATIONS						
	DESCRIPTION					
А	AMPERE, AMPACITY					
AC	ABOVE COUNTER					
ACT	ACOUSTIC CEILING TILE					
AFF	ABOVE FINISH FLOOR					
BFC	BELOW FINISH CEILING					
CCT	CIRCUIT, CCT: C=PANEL "B"; CT= CIRCUIT "1" (B1)					
CLNG	CEILING					
D	DEMOLITION , REMOVE BACK TO SOURCE					
DED	DEDICATED CIRCUIT					
DSW	DISCONNECT SWITCH					
DWG	DRAWING					
D/W	DISHWASHER					
Е	EXISTING OR "NO DESIGNATION"					
GFCI	GROUND FAULT CIRCUIT INTERRUPTER					
HTR	HEATER					
HVAC	HEATING, VENTILATING AND AIR CONDITIONING					
HZ	HERTZ					
JB	JUNCTION BOX					
М	METER					
MD	MOTION DETECTOR					
N	NEW					
N.I.C.	NOT IN CONTRACT					
NTS	NOT TO SCALE					
OC	ON COUNTER					
O/C	ON CENTER					
OS	OCCUPANCY SENSOR					
PNL	PANEL					
R	RELOCATED LOCATION					
RECPT.	RECEPTACLE					
SW	SWITCH					
TBD	TO BE DETERMINED					
TYP.	TYPICAL					
V	VOLT					
W	WATT					

	ELECTRICAL LEGEND
TYPE	DESCRIPTION
ŧ	DUPLEX RECEPTACLE
⊖ <sup>+XX</sup>	HEIGHT IN INCHES ABOVE FINISH FLOOR TO CENTERLINE OF DEVICE
$\ominus_{\overline{1},2}$	2-GANG DUPLEX RECEPTACLE
<del>G</del> TSB	DUPLEX RECEPTACLE WITH (2) 2A USB 2.2 & 3.0 CAPABLE
GF	GROUND FAULT CIRCUIT INTERRUPTER DUPLEX RECEPTACLE
\$	LIGHT SWITCH, SINGLE POLE
DSW	DISCONNECT SWITCH
JB JB	JUNCTION BOX
FP	FIRE ALARM MANUAL PULL STATION
FB	FIRE ALARM BELL
	FIRE ALARM STROBE SIREN
ØFT	HEAT DETECTOR, CEILING RECESSED
FT	HEAT DETECTOR, CEILING SURFACE MOUNT
⊢\$PK	PUBLIC ADDRESS SPEAKER
(SPK)	SPEAKER
[SPK]	SPEAKER
SER	SPEAKER
ত	SPEAKER VOLUME CONTROLLER
$\triangleright$	DATA PORT
$\bigcirc$	FLOOR PEDESTAL DATA PORT
•	VOICE (PHONE) PORT: CENTREX LAND LINE
KP	KEY PAD/DISPLAY - SECURITY
ΗĹ	HORN - SECURITY
$\triangleleft_{\rm MD}$	MOTION DETECTOR- SECURITY
PNL "X"	ELECTRICAL PANEL
()	THERMOSTAT

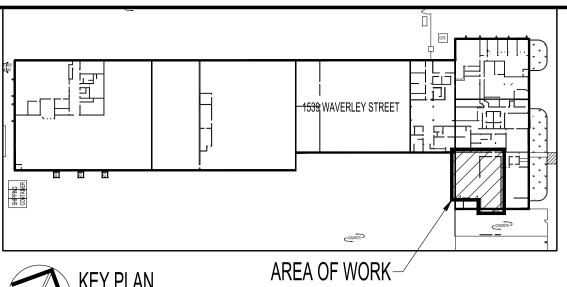



## NOTES:

THESE DRAWINGS SHALL NOT BE SCALED. CONSULT WITH CLIENT AND DESIGNER ON ANY CONCERNS.

ALSO REFER TO ELECTRICAL SPECIFICATIONS.

SUBMISSION OF SITE MARK-UPS, AS-BUILTS, OPERATING & MAINTENANCE MANUALS AND OTHER SUPPORTING DOCUMENTS TO CLIENT ARE MANDATORY AT THE COMPLETION OF THIS PROJECT

THE CONTRACTOR SHALL VISIT THE SITE AND ENSURE ALL DIMENSIONS, DATUM, AND DETAILED INFORMATION SHOWN ARE CORRECT.

THE CONTRACTOR IS TO REVIEW AND COORDINATE ALL ARCHITECTURAL, MECHANICAL AND ELECTRICAL DRAWINGS FOR ADDITIONAL OPENINGS THROUGH FLOORS, WALLS, AND CEILINGS FOR DUCTS, PIPES & ELECTRICAL RISERS AND ALL OPENINGS NOT SHOWN ON DRAWINGS.

ALL OPENINGS THROUGH FIRE ASSEMBLIES INCLUDING FLOORS AND CEILINGS ARE TO BE FIRE STOPPED AND SEALED WITH ULC APPROVED FIRE STOPPING TO MAINTAIN THE INTEGRITY OF THE FIRE SEPARATION, AND PROVIDE A SMOKE-TIGHT BARRIER.

ALL PRODUCTS AND MATERIALS TO BE USED AND INSTALLED SHALL CONFORM WITH MANUFACTURER'S SPECIFICATIONS, APPLICABLE CODES AND AUTHORITY HAVING JURISDICTION.

THE CONTRACTOR SHALL BE RESPONSIBLE TO PATCH AND MAKE GOOD ALL EXISTING CONSTRUCTION AFFECTED BY THE REMOVAL OF ALL ITEMS FORMING PART OF THE RENOVATION WORK.

ALL ABANDONED (KNOWN & UNKNOWN) ELECTRICAL FIXTURES, COMPONENTS, RECEPTACLES & DATA CABLING SHALL BE REMOVED BACK TO SOURCE & TERMINATED AS PER APPLICABLE CODES.

RECONNECT & TEST ALL FIRE PREVENTION EQUIPMENT.

## WARNING:

ASBESTOS MAYBE PRESENT BEHIND WALLS, CEILING SPACE & FLOORS. IF ASBESTOS & ANY HAZARDOUS MATERIAL IS FOUND, STOP WORK IMMEDIATELY & CONTACT CITY OF WINNIPEG, CENTRAL CONTROLS, PH: 204-986-2351.

0	ISSUED FOR CONSTRUCTION						DTA	2018 .??.??		
No.	<b>REVISION/DESCRIPTION</b>						BY	DATE		
SEAL										
DRAWN	DTA I	CHECH	KED	DESIGNED	DTA	APP	ROVED			
DATE	2018.12.06	USER APPRO	DVAL							
proje( P	Winnipeg Winnipeg Winnipeg Winnipeg Winnipeg Winnipeg Winnipeg THE CITY OF WINNIPEG PROPERTY AND DEVELOPMENT DEPARTMENT MUNICIPAL ACCOMMODATIONS DIVISION 3-65 GARRY STREET, R3C 4K4 PROJECT PUBLIC WORKS SOUTH YARD									
RENOVATIONS TO ENLARGE PARKS VEHICLE STORAGE GARAGE 1539 WAVERLEY STREET										
SHEET	TITLE									
PARTIAL MAIN FLOOR PLAN ELECTRICAL DEMOLITION AND RENOVATION										
<b>scale</b> AS	SHOWN		PROJECT N 2018-		Sheet	No:		E1		

DRAWING SHEET SIZE: A1 (841mm x 594mm) PLOT 1:1