

0+75 CONNECT TO EXIST 150 AC WM
 0+76.38 INSTALL 150-45° BEND
 0+77.38 INSTALL 150-45° BEND
 0+78.88 INSTALL 150-45° BEND
 0+79.882 S R FLEET AVE AND INSTALL 150 VALVE
 0+81.10 INSTALL 400X150 REDUCER
 0+81.70 REMOVE EXIST VALVE
 0+82.03 REMOVE EXIST VALVE
 0+85.00 INSTALL 400X400X200 TEE


0+99.39 REMOVE EXIST HYDRANT (SD-006)
 1+00 N R FLEET AVE
 1+02.50 INSTALL HYDRANT (SD-006)

1+79.00 INSTALL HYDRANT (SD-006)
 1+82.00 INSTALL 400 VALVE



WATER SERVICE INFORMATION					
ADDRESS	SIZE (mm) MATERIAL (STREET)	SIZE (mm) MATERIAL (PROP.)	SHORT & LONG MEASUREMENT	CORP. LOCATION	REMARKS
602 LINDSAY ST RESIDENTIAL	20 COPPER	20 COPPER	5.43 NSL HSE	OPP S/C	RECONNECT SERVICE
606 LINDSAY ST RESIDENTIAL	20 COPPER	20 COPPER	86.87 NSL FLEET AVE	OPP S/C	RECONNECT SERVICE
610 LINDSAY ST RESIDENTIAL	20 COPPER	20 COPPER	64.30 NSL FLEET AVE	OPP S/C	RECONNECT SERVICE
612 LINDSAY ST RESIDENTIAL	20 COPPER	20 COPPER	2.46 NSL HSE	OPP S/C	RECONNECT SERVICE
616 LINDSAY ST RESIDENTIAL	20 COPPER	20 COPPER	49.92 NSL FLEET AVE	OPP S/C	RECONNECT SERVICE
620 LINDSAY ST RESIDENTIAL	20 COPPER	20 COPPER	2.64 NSL HSE	OPP S/C	RECONNECT SERVICE
638 LINDSAY ST RESIDENTIAL	20 COPPER	20 COPPER	41.63 NSL FLEET AVE	3.9 N OF S/C	RECONNECT SERVICE
				1.5 S OF S/C	RECONNECT SERVICE
				5.44 NSL FLEET AVE	RECONNECT SERVICE
				1.70 NSL HSE	RECONNECT SERVICE
				2.25 SSL FLEET AVE	RECONNECT SERVICE

NOTE: CHAINAGES SHOWN ARE ALONG E. R. OF LINDSAY ST.

* SERVICES TO BE RENEWED TO R. ALL OTHERS TO BE RECONNECTED

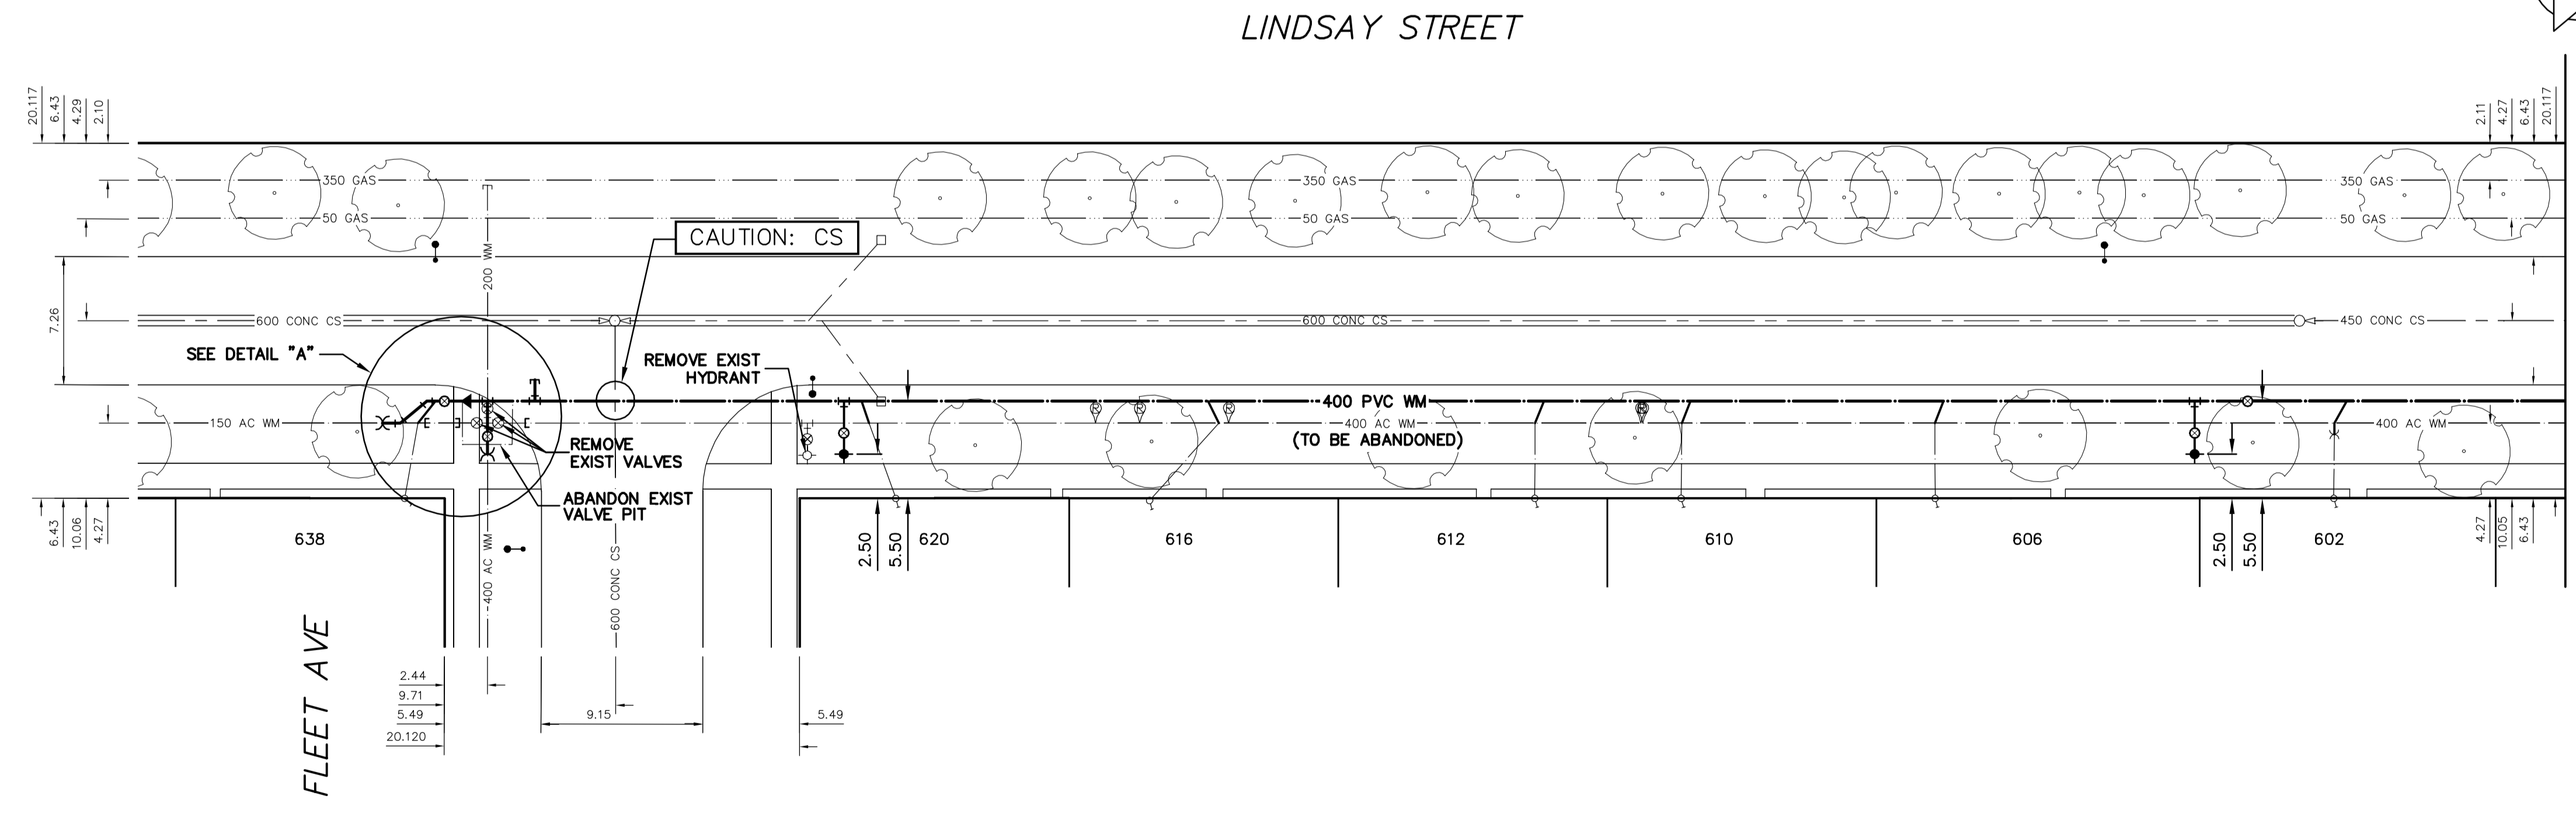

2+00 MATCHLINE (SEE DWG. D-13459)

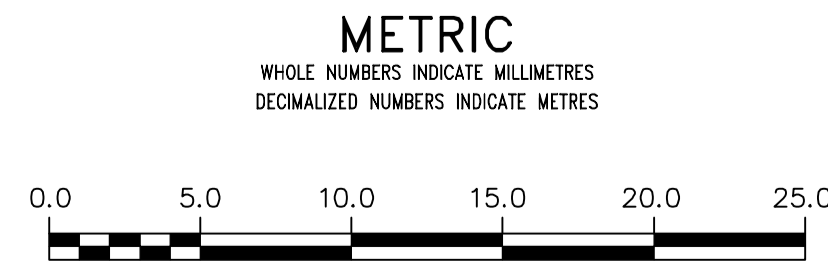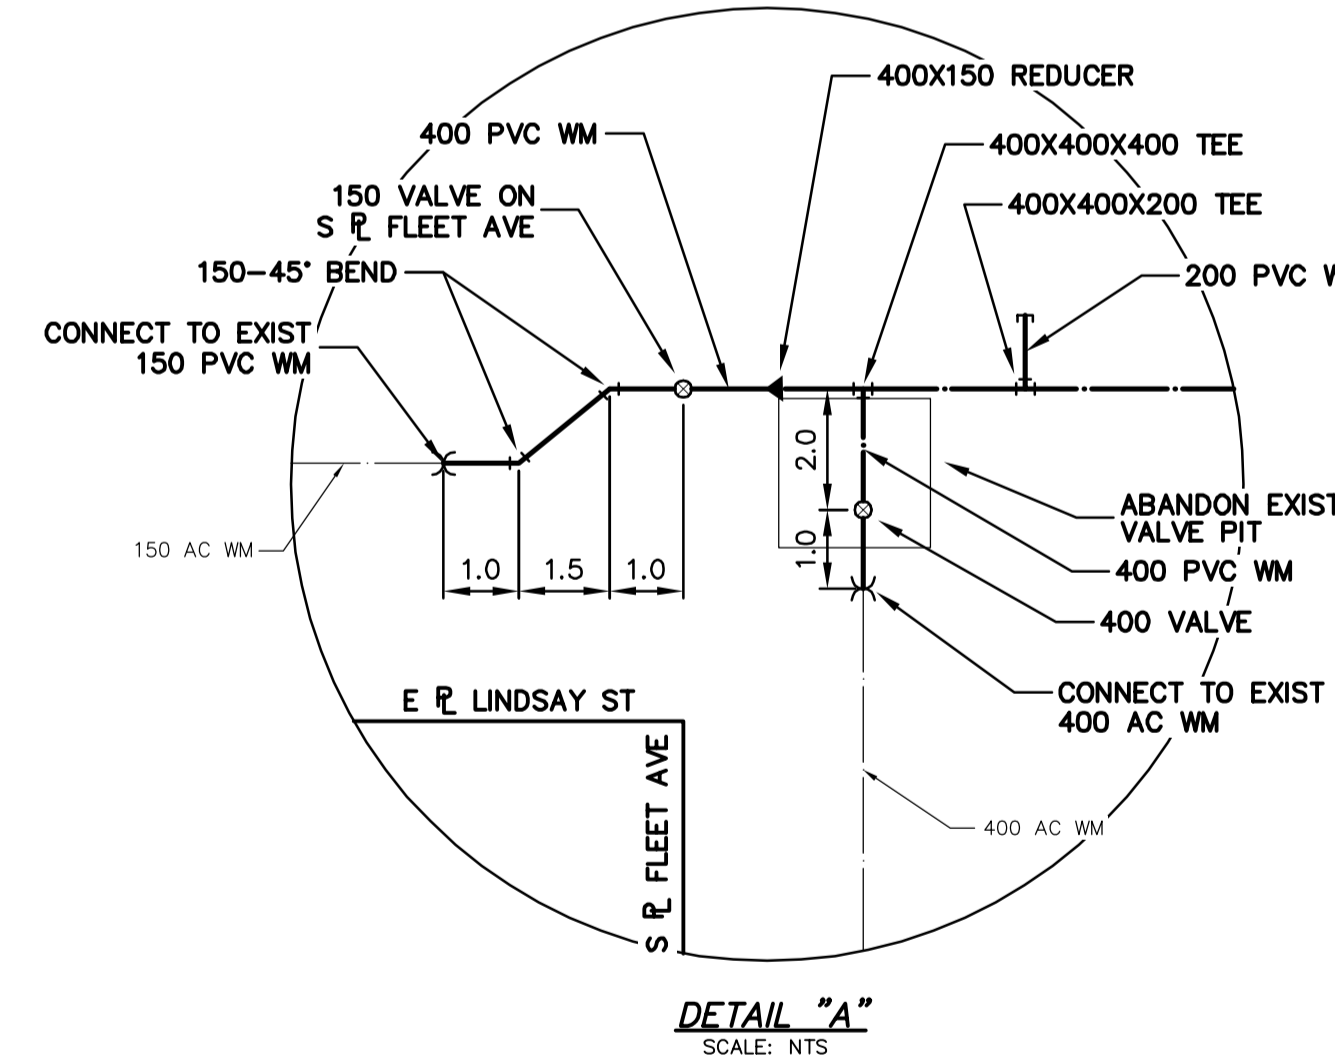

WARNING IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST: 1) NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION. 2) TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS. SEE PROVINCIAL REGULATION 210/72 FOR DETAILS	LOCATION APPROVED UNDERGROUND STRUCTURES SUPV. U/G STRUCTURES COMMITTEE _____ DATE _____ NOTE: LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.	B.M. ELEV. _____ CONSTRUCTION COMPLETION DATE: YYYY MM DD _____	DESIGNED BY: TS CHECKED BY: SC DRAWN BY: SM APPROVED BY: KZ SCALE: HORIZONTAL 1:250, VERTICAL 1:50 DATE: 2014 02 28 PLOT DATE: 2014 02 28	ENGINEER'S SEAL ORIGINAL SIGNED BY S.R.J. COURNOYER 14-02-28 CONSULTANT DRAWING NUMBER: _____
		NO. _____ REVISIONS _____ DATE _____ BY _____	FILE PATH: R:\DRAWINGS\WATER\RENEWAL\2014_RENEWALS\CONTRACT 8\ FILE NAME: LINDSAY.dwg	

THE CITY OF WINNIPEG
 WATER AND WASTE DEPARTMENT
 ENGINEERING DIVISION
 2014 WATER RENEWALS
LINDSAY STREET
 FLEET AVENUE TO
 100 N OF FLEET AVENUE

SHEET 5 OF 11
 CITY DRAWING NUMBER
D-13458

VALVES TO BE COUNTER-CLOCKWISE TO CLOSE (RED OPERATING NUT)