




METRIC WHOLE NUMBERS INDICATE MILLIMETRES DECIMALIZED NUMBERS INDICATE METRES



	B.M. ELEV.			DESIGNED BY	CDW	14.
				DRAWN BY	КВ	
				CHECKED BY	SSR	DILI
				APPROVED BY	_	CONSU
				HOR. SCALE	_	RELEASED FOR CONSTRUCTION
0	ISSUED FOR TENDER	06/19/15	CDW	VERTICAL		
N). REVISIONS	DATE	BY	_{DATE} Jur	ne 19, 2015	DATE





15-1815

Winnipeg	THE CI
STEEL O\	/ERHEAD SIGN

ITY OF WINNIPEG WORKS DEPARTMENT


. BLVD.

CITY DRAWING NUMBER **SUPPORT** STRUCTURES - 2015 MAINTENANCE WORKS SHEET

S647 PEMBINA HWY. SB, NORTH OF

CONSULTANT DRAWING NUMBER N/A BISHOP GRANDIN BLVD. AT WB RAMP

OHSS-15-05

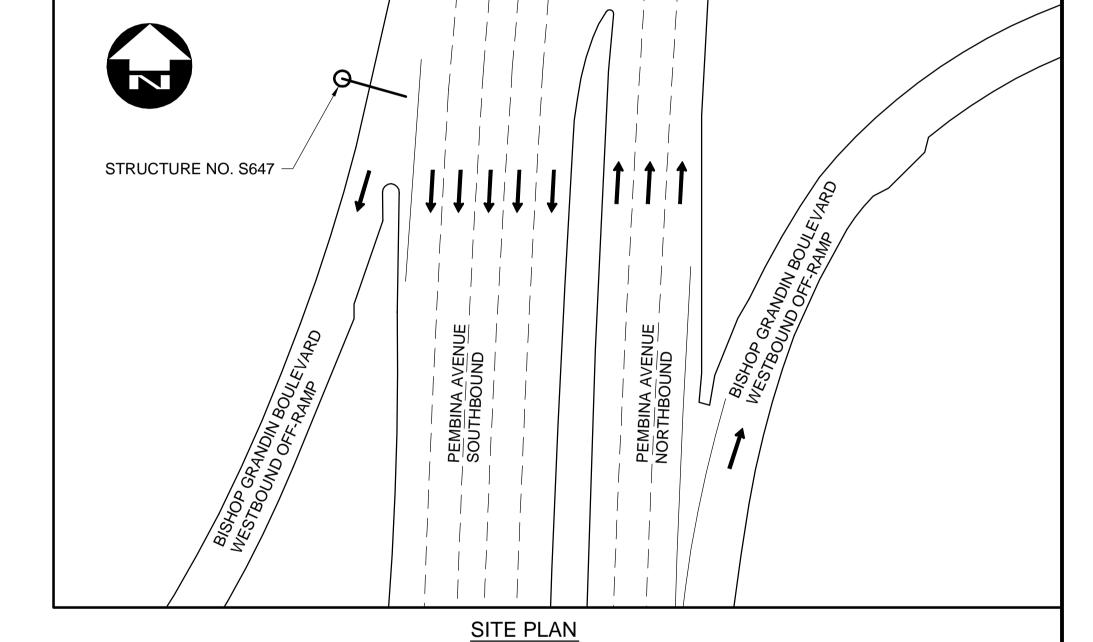

LOCATION MAP

NOTES:

S647 SITE LOCATION

BISHOP GRANDIN

- 1. REPLACE EXISTING S.S. BOLTS WITH ASTM A325 TYPE 1 HOT-DIP GALVANIZED BOLTS C/W 1 NUT AND 2 WASHERS. LENGTH OF BOLT TO SUIT.
- 2. CLIP WASHERS TO CLEAR AS DIRECTED BY THE CONTRACT ADMINISTRATOR.
- 3. APPROX. MASS OF EXISTING STEEL STRUCTURE: 1100kg.
- 4. EXACT LOCATION OF SIGN PANEL AND SIGN PANEL BRACKETS SHALL BE FIELD MEASURED AND RECORDED BY THE CONTRACTOR PRIOR TO REMOVAL.
- 5. FINAL INSTALLED LOCATION OF SIGN AND MOUNTING BRACKETS WILL BE DETERMINED BY THE CONTRACT ADMINISTRATOR.