	INSTRUMENT AND DEVICE IDENTIFICATION TABLE						
	FIRST-LETTER	?	SUCCEEDING-LETTERS				
	MEASURED OR INITIATING VARIABLE	MODIFIER	READOUT OR PASSIVE FUNCTION	OUTPUT FUNCTION	MODIFIER		
A	ANALYSIS OR SAMPLER		ALARM, TROUBLE				
В	BURNER FLAME				CLOSE, DECREASE (1)		
С	CONDUCTIVITY			CONTROL			
D	DENSITY	DIFFERENTIAL			OPEN, INCREASE (1)		
E	VOLTAGE (EMF)		SENSOR (PRIMARY ELEMENT)				
F	FLOW RATE	RATIO (FRACTION)	FAILURE				
G	GAS		GLASS, VIEWING DEVICE, GUAGE (2)	GENERATOR (ULTRASONIC)			
Н	HAND (MANUAL)				HIGH		
1	CURRENT (ELECTRICAL)		INDICATE				
J	POWER	SCAN					
K	TIME	TIME RATE OF CHANGE		CONTROL STATION			
L	LEVEL		LIGHT (3)		LOW		
М	MOTOR	MOMENTARY	OPERATE, ON/OFF		MIDDLE, INTERMEDIATE		
N	MOISTURE			START			
0	TORQUE		ORIFACE, RESTRICTION	STOP, OVERLOAD			
Р	PRESSURE, VACUUM		POINT (TEST CONNECTION)				
Q	COMMON, QUANTITY	INTEGRATE, TOTALIZE					
R	RADIOACTIVITY		RECORD				
S	SPEED, FREQUENCY	SAFETY		SWITCH			
T	TEMPERATURE		TRANSMITTER				
U	MULTIVARIABLE		MULTIFUNCTION	MULTIFUNCTION	MULTIFUNCTION		
۷	VIBRATION, MECHANICAL ANALYSIS, VALVE, DAMPER (4)			VALVE, DAMPER, LOUVER			
W	WEIGHT, FORCE		WELL				
X	UNCLASSIFIED (5)	X AXIS	UNCLASSIFIED (5)	UNCLASSIFIED (5)	UNCLASSIFIED (5)		
Υ	EVENT, STATE, OR PRESENCE	Y AXIS		RELAY, COMPUTE, CONVERT			
Z	POSITION	Z AXIS		DRIVER, ACTUATOR, UNCLASSIFIED FINAL CONTROL ELEMENT			

NOTES FOR INSTRUMENT AND DEVICE IDENTIFICATION TABLE:

- 1. WHEN THE B AND D LETTERS ARE TO REPRESENT AN OPEN AND CLOSED COMMAND OR POSITION, THEY ARE CURRENTLY OFTEN USED NOT AS A MODIFIER, BUT RATHER AS A READOUT OR OUTPUT FUNCTION. FOR EXAMPLE, SB RATHER THAN SCB.
- 2. IN CURRENT DRAWINGS, THE LETTER G IS OFTEN USED TO REPRESENT A GAUGE AS IN TG (TEMPERATURE GAUGE). HOWEVER, SINCE A TEMPERATURE GAUGE USUALLY HAS A SCALE TO READ A SPECIFIC TEMPÈRATURE, IT WOULD MORE CORRECTLY BE CALLED AN INDICATOR (TI). GAUGE IS INCLUDED FOR HISTORICAL REASONS.
- 3. ON CURRENT NEWPCC P&ID DRAWINGS, THE PILOT LIGHTS USUALLY OMIT THE L DESIGNATION. FOR EXAMPLE, A VALVE OPEN PILOT LIGHT IS DESIGNATED AS ZD. TECHNICALLY, THE APPROPRIATE IDENTIFIER IS ZLD, BUT ZD HAS BEEN MAINTAINED FOR HISTORICAL REASONS.
- 4. THE USE OF V AS AN INITIAL LETTER HAS BEEN INCORRECTLY USED IN THE PAST TO REPRESENT A VALVE OR A DAMPER, AND IS MAINTAINED IN THE IDENTIFICATION TABLE DUE TO ITS COMMON USE AS SUCH. HOWEVER, THESE INSTRUMENTS SHOULD IDEALLY BE RENAMED TO THE APPROPRIATE IDENTIFIERS. FOR EXAMPLE, MOST VY INSTRUMENTS (PNEUMATIC RELAYS) ON THE CURRENT DRAWINGS COULD BE RELABELLED AS HY OR FY INSTRUMENTS.
- 5. THE LETTER X IS TO BE DEFINED AT THE TIME OF USE, AND MAY BE USED FOR MULTIPLE DEFINITIONS WHERE NO OTHER LETTER IS APPLICABLE.

	INSTRUMENT FIELD [
IDENTIFIER	DEFINITION						
AAH	ANALYSIS ALARM — HIGH	\dagger					
AAHH	ANALYSIS ALARM — HIGH—HIGH	Ţ					
AE AIT	ANALYSIS ELEMENT ANALYSIS INDICATING TRANSMITTER (ANALYTIC INST.)	+					
AK	ANALYSIS (AMPLER) CONTROL STATION	+					
ARV	AIR RELEASE VALVE	Ť					
ASH	ANALYSIS SWITCH — HIGH	\perp					
ASHH ASY	ANALYSIS SWITCH — HIGH—HIGH ANALYSIS SAFETY RELAY	╀					
AST	ANALYSIS TRANSMITTER (ANALYTIC INST.)	\dagger					
BK	BURNER CONTROL STATION	İ					
BS	BURNER FLAME SWITCH	\downarrow					
BV DE	BURNER VALVE DENSITY ELEMENT	╀					
DR	DENSITY RECORDER	+					
DT	DENSITY TRANSMITTER	T					
DX	DENSITY SOURCE (X = SOURCE)	I					
<u>EE</u>	VOLTAGE ELEMENT/TRANSFORMER	╀					
EI ET	VOLTAGE INDICATOR VOLTAGE TRANSMITTER	+					
FE	FLOW ELEMENT	\dagger					
FG	FLOW METER ULTRASONIC GENERATOR	İ					
Fl	FLOW INDICATOR	$oxed{\bot}$					
FIC	FLOW INDICATING CONTROLLER	\downarrow					
FIT FQI	FLOW INDICATING TRANSMITTER FLOW TOTALIZING INDICATOR	+					
FQY	FLOW TOTALIZING / INTEGRATING RELAY	\dagger					
FR	FLOW RECORDER	İ					
FRC	FLOW RECORDING CONTROLLER						
FRQ FSL	FLOW RECORDING TOTALIZER FLOW SWITCH LOW	+					
FJ.	FLOW TRANSMITTER	+					
FV	FLOW VALVE	†					
FY	FLOW COMPUTER / RELAY	I					
GE	GAS ELEMENT	\downarrow					
GS HK	GAS SWITCH MODULE HAND CONTROL STATION	+					
HS	HAND SWITCH	\dagger					
HSS	HAND SAFETY SWITCH	Ť					
HV	HAND VALVE	4					
IS IE	CURRENT SWITCH CURRENT ELEMENT/TRANSFORMER	+					
	CURRENT INDICATOR	1					
IY	CURRENT RELAY						
KY	TIMER RELAY						
LCV	LEVEL CONTROL VALVE	4					
<u>LE</u> LI	LEVEL ELEMENT LEVEL INDICATOR	+					
LIC	LEVEL INDICATING CONTROLLER	1					
LIT	LEVEL INDICATING TRANSMITTER]					
LR	LEVEL RECORDER	4					
LSL LSH	LEVEL SWITCH LOW LEVEL SWITCH HIGH	+					
LSHL	LEVEL SWITCH HIGH/LOW	┨					
LT	LEVEL TRANSMITTER	1					
LV	LEVEL VALVE]					
LY	LEVEL RELAY (I/I CONVERTER)	4					
MB MD	MOTOR DECREASE OR REVERSE MOTOR INCREASE OR FORWARD	+					
MF	MOTOR FAILURE	+					
ММ	MOTOR RUN						
МО	MOTOR OVERLOAD	1					
NS PCV	MOISTURE SWITCH	4					
PCV	PRESSURE CONTROL VALVE PRESSURE ELEMENT	+					
DF	I INCOUNT ELLIVIEIVI						
PE PG	PRESSURE GAUGE	1					
	PRESSURE GAUGE PRESSURE INDICATOR]					
PG							

	INSTRUMENT FIELD	DEVICE IDE	ENTIFIERS			
TIFIER	DEFINITION	IDENTIFIER	DEFINITION			
4 AH	ANALYSIS ALARM — HIGH	PS	PRESSURE SWITCH			
AHH	ANALYSIS ALARM — HIGH—HIGH	PSHH	PRESSURE SWITCH HIGH (2ND STAGE)			
AE	ANALYSIS ELEMENT	PSL	PRESSURE SWITCH LOW			
AIT	ANALYSIS INDICATING TRANSMITTER (ANALYTIC INST.)	PSV	PRESSURE SAFETY VALVE (RELIEF)			
AK	ANALYSIS (AMPLER) CONTROL STATION	PT	PRESSURE TRANSMITTER			
ARV	AIR RELEASE VALVE	PY	PRESSURE RELAY (I/I CONVERTER)			
ASH	ANALYSIS SWITCH — HIGH	SI	SPEED INDICATOR			
SHH	ANALYSIS SWITCH - HIGH-HIGH	SK	SPEED CONTROL STATION			
ASY	ANALYSIS SAFETY RELAY	ST	SPEED TRANSMITTER			
AT	ANALYSIS TRANSMITTER (ANALYTIC INST.)	TE	TEMPERATURE ELEMENT			
BK	BURNER CONTROL STATION	TG	TEMPERATURE GAUGE			
BS	BURNER FLAME SWITCH	TI	TEMPERATURE INDICATOR			
BV	BURNER VALVE	TIC	TEMPERATURE INDICATING CONTROLLER			
DE	DENSITY ELEMENT	TIT	TEMPERATURE INDICATING TRANSMITTER			
DR	DENSITY RECORDER	TR	TEMPERATURE RECORDER			
DT	DENSITY TRANSMITTER	TS	TEMPERATURE SWITCH			
DX	DENSITY SOURCE $(X = SOURCE)$	TSH	TEMPERATURE SWITCH HIGH			
EE	VOLTAGE ELEMENT/TRANSFORMER	TSL	TEMPERATURE SWITCH LOW			
El	VOLTAGE INDICATOR	TT	TEMPERATURE TRANSMITTER			
ET	VOLTAGE TRANSMITTER	TV	TEMPERATURE VALVE			
FE	FLOW ELEMENT	TW	TEMPERATURE THERMOWELL			
FG	FLOW METER ULTRASONIC GENERATOR	TY	TEMPERATURE RELAY (SOLENOID VALVE OR M/P)			
FI	FLOW INDICATOR	XE	VELOCITY ELEMENT			
FIC	FLOW INDICATING CONTROLLER	ΧI	VELOCITY INDICATOR			
FIT	FLOW INDICATING TRANSMITTER	XK	UNCLASSIFIED CONTROL STATION (X = FIRE)			
FQI	FLOW TOTALIZING INDICATOR	XT	POWER FACTOR TRANSMITTER			
-QY	FLOW TOTALIZING / INTEGRATING RELAY	XT	VELOCITY TRANSMITTER $(X = VELOCITY)$			
FR	FLOW RECORDER	XX	UNCLASSIFIED (XX = ALARM ANNUNCIATOR)			
-RC	FLOW RECORDING CONTROLLER	YS	COMPUTER SWITCH			
-RQ	FLOW RECORDING TOTALIZER	YSA	STATE SAFETY ALARM			
-SL	FLOW SWITCH LOW	YSL	STATE SAFETY LIGHT			
FT	FLOW TRANSMITTER	ZI	POSITION INDICATOR			
FV	FLOW VALVE	ZS	POSITION SWITCH			
FY	FLOW COMPUTER / RELAY	ZSB	POSITION SWITCH CLOSED (LIMIT SWITCH)			
GE	GAS ELEMENT	ZSD	POSITION SWITCH OPEN (LIMIT SWITCH)			
GS	GAS SWITCH MODULE	ZSH	POSITION SWITCH HIGH			
HK	HAND CONTROL STATION	ZSL	POSITION SWITCH LOW			
HS	HAND SWITCH	ZT	POSITION TRANSMITTER			
HSS	HAND SAFETY SWITCH					
HV	HAND VALVE	lante i	TOD INICTOLIMENT FIFTO DEVICE IDENTIFIEDO			
IS	CURRENT SWITCH] <u> </u>	<u>FOR INSTRUMENT FIELD DEVICE IDENTIFIERS</u>			
IE	CURRENT ELEMENT/TRANSFORMER	THE LA	ST IDENTIFIER LETTER IS IN SOME CASES OPTIONAL (EG. FSL)			
	CURRENT INDICATOR		ABLE IS DERIVED FROM THE INSTRUMENT & DEVICE IDENTIFICATION			
IY	CURRENT RELAY		AND IS NOT EXHAUSTIVE.			
KY	TIMER RELAY					

IDENTIFIER	DEFINITION N MULTIPLE INSTRUMENTS					
(N)						
AÁ	AUDIBLE ALARM					
A/M	AUTO / MANUAL					
A/0/T	AUTO / OFF / TEST					
C/H	COMPUTER / HAND					
C/L	COMPUTER / LOCAL					
CLS	CLOSE					
C/0	COMPUTER / OFF					
COB	COMPUTER / OFF / BYPASS					
СОН	COMPUTER / OFF / HAND					
COT	COMPUTER / OFF / TIME					
DCS	DISTRIBUTED CONTROL SYSTEM					
DS	DECREASE SPEED					
E/R	EXTEND / RETRACT					
E/S	EMERGENCY STOP					
ETM	ELAPSED TIME METER					
FOR	FORWARD / OFF / REVERSE					
H/A	HAND / AUTO					
HOA	HAND / OFF / AUTO					
HOR	HAND / OFF / REMOTE					
I/D	INCREASE / DECREASE					
INT/EXT	INTERNAL / EXTERNAL					
IS	INCREASE SPEED					
LCP	LOCAL CONTROL PANEL					
LD	LOCAL JUNCTION BOX					
LJB L/0	LOCAL JUNCTION BOX LOCAL / OFF					
LOR	LOCAL / OFF / REMOTE					
LOS	LOCK OFF STOP					
L/R	LOCAL / REMOTE					
LSR	LOCAL / STOP / REMOTE					
MCC	MOTOR CONTROL CENTER					
0/A	OFF / AUTO					
0/C	OPEN / CLOSE					
O/M	OFF / MAINTENANCE					
0/0	OFF / ON					
OPN	OPEN					
RST	RESET					
RTD	RESISTIVE TEMPERATURE DEVICE					
SEL	SELECTOR					
S/F	SLOW / FAST					
SOFA	SLOW / OFF / FAST / AUTO					
SOL S/S	SOLENOID					
S/S S/W	START / STOP					
S/W TAH	SUMMER / WINTER					
TAH TAL	TEMPERATURE ALARM HIGH TEMPERATURE ALARM LOW					
TSH	TEMPERATURE SWITCH HIGH					
TSL	TEMPERATURE SWITCH HIGH					
T/C	THERMOCOUPLE					
VIB	VIBRATION					

INSTRUMENT FIELD **DEVICE NUMBERING**


 INSTRUMENT IDENTIFICATION MODIFIER —— LOOP OR DEVICE NUMBER (001-999) — INSTRUMENT ID — MAX. OF 4 LETTERS AS PER IDENTIFICATION TABLE — DEVICE SUFFIX FOR MULTIPLE DEVICES ON THE SAME LOOP

CONTROL SYSTEM (DCS) POINT TAG NUMBERING

- COMPUTER SYSTEM EQUIPMENT LOCATION IDENTIFIER (2 LETTERS) — LOOP OR DEVICE NUMBER (001 - 999) — INSTRUMENT OR DEVICE IDENTIFICATION - PROCESS AREA IDENTIFIER

PLC POINT TAG **NUMBERING**

- PROCESS AREA IDENTIFIER

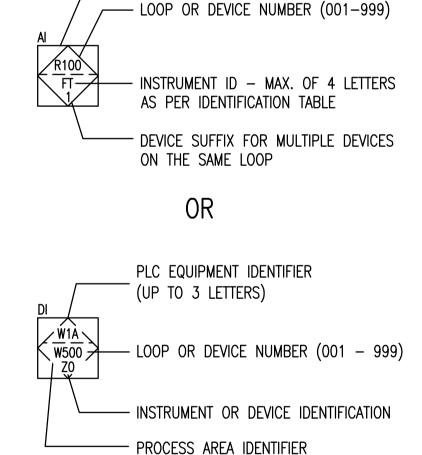

PRELIMINARY NOT TO BE USED FOR CONSTRUCTION

METRIC

WHOLE NUMBERS INDICATE MILLIMETRES DECIMALIZED NUMBERS INDICATE METRES



LOCATION APPROVED UNDERGROUND STRUCTURES	B.M. ELEV.			96	Stant	ec Consult	c Consulting Ltd.			
SUPV. U/G STRUCTURES DATE					905 Waverley Street, Winnip Tel 204-489-5900 Fax 20			oeg, Manitoba 04-453-9012		
NOTE:					DESIGNED BY	D.W.D.	CHECKED BY	B.S.J.		
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR					DRAWN BY	D.K.G.	APPROVED BY	D.W.D.		
THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE					HOR. SCALE: VERTICAL:	-	RELEASED FOR CONSTRUCTION:		BID OPPORTUNITY N	
OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.	NO.	REVISIONS	DATE	BY	DATE 2012.0	01.23	DATE			

THE CITY OF WINNIPEG WATER AND WASTE DEPARTMENT Winnipeg

NORTH END WATER POLLUTION CONTROL CENTRE REHABILITATION OF DIGESTER #II AND HOLDING TANKS No. 5 AND No. 7 AND ASSOCIATED WORKS

PROCESS & INSTRUMENTATION DIAGRAM LEGEND & DETAILS-SHEET 2

__/__

BID OPPORTUNITY NO.

187-2012_Drawing_A-2-RO