	INSTRUMENT AND DEVICE IDENTIFICATION TABLE							
	FIRST-LETTER	}	SUCCEEDING-LETTERS					
	MEASURED OR INITIATING VARIABLE	MODIFIER	READOUT OR PASSIVE FUNCTION	OUTPUT FUNCTION	MODIFIER			
Α	ANALYSIS OR SAMPLER		ALARM, TROUBLE					
В	BURNER FLAME				CLOSE, DECREASE (1)			
С	CONDUCTIVITY		CONTROL					
D	DENSITY	DIFFERENTIAL			OPEN, INCREASE (1)			
E	VOLTAGE (EMF)		SENSOR (PRIMARY ELEMENT)					
F	FLOW RATE	RATIO (FRACTION)	FAILURE					
G	GAS		GLASS, VIEWING DEVICE, GUAGE (2)					
Н	HAND (MANUAL)				HIGH			
\Box	CURRENT (ELECTRICAL)		INDICATE					
J	POWER	SCAN						
K	TIME	TIME RATE OF CHANGE		CONTROL STATION				
L	LEVEL		LIGHT (3)		LOW			
М	MOTOR	MOMENTARY	OPERATE, ON/OFF		MIDDLE, INTERMEDIATE			
N	MOISTURE			START				
0	TORQUE		ORIFACE, RESTRICTION	STOP, OVERLOAD				
P	PRESSURE, VACUUM		POINT (TEST CONNECTION)					
Q	COMMON, QUANTITY	INTEGRATE, TOTALIZE						
R	RADIOACTIVITY		RECORD					
S	SPEED, FREQUENCY	SAFETY		SWITCH				
Τ	TEMPERATURE		TRANSMITTER					
U	MULTIVARIABLE		MULTIFUNCTION	MULTIFUNCTION	MULTIFUNCTION			
٧	VIBRATION, MECHANICAL ANALYSIS, VALVE, DAMPER (4)			VALVE, DAMPER, LOUVER				
W	WEIGHT, FORCE		WELL					
X	UNCLASSIFIED (5)	X AXIS	UNCLASSIFIED (5)	UNCLASSIFIED (5)	UNCLASSIFIED (5)			
Y	EVENT, STATE, OR PRESENCE	Y AXIS		RELAY, COMPUTE, CONVERT				
Z	POSITION	Z AXIS		DRIVER, ACTUATOR, UNCLASSIFIED FINAL CONTROL ELEMENT				


NOTES FOR INSTRUMENT AND DEVICE IDENTIFICATION TABLE:


- WHEN THE B AND D LETTERS ARE TO REPRESENT AN OPEN AND CLOSED COMMAND OR POSITION, THEY ARE CURRENTLY OFTEN USED NOT AS A MODIFIER, BUT RATHER AS A READOUT OR OUTPUT FUNCTION. FOR EXAMPLE, SB RATHER THAN SCB.
- IN CURRENT DRAWINGS, THE LETTER G IS OFTEN USED TO REPRESENT A GAUGE AS IN TG (TEMPERATURE GAUGE). HOWEVER, SINCE A TEMPERATURE GAUGE USUALLY HAS A SCALE TO READ A SPECIFIC TEMPERATURE, IT WOULD MORE CORRECTLY BE CALLED AN INDICATOR (TI). GAUGE IS INCLUDED FOR HISTORICAL REASONS.
- 3. ON CURRENT NEWPCC P&ID DRAWINGS, THE PILOT LIGHTS USUALLY OMIT THE L DESIGNATION. FOR EXAMPLE, A VALVE OPEN PILOT LIGHT IS DESIGNATED AS ZD. TECHNICALLY, THE APPROPRIATE IDENTIFIER IS ZLD, BUT ZD HAS BEEN MAINTAINED FOR HISTORICAL REASONS.
- 4. THE USE OF V AS AN INITIAL LETTER HAS BEEN INCORRECTLY USED IN THE PAST TO REPRESENT A VALVE OR A DAMPER. AND IS MAINTAINED IN THE IDENTIFICATION TABLE DUE TO ITS COMMON USE AS SUCH. HOWEVER, THESE INSTRUMENTS SHOULD IDEALLY BE RENAMED TO THE APPROPRIATE IDENTIFIERS. FOR EXAMPLE, MOST VY INSTRUMENTS (PNEUMATIC RELAYS) ON THE CURRENT DRAWINGS COULD BE RELABELLED AS HY OR FY INSTRUMENTS.
- 5. THE LETTER X IS TO BE DEFINED AT THE TIME OF USE, AND MAY BE USED FOR MULTIPLE DEFINITIONS WHERE NO OTHER LETTER IS APPLICABLE.

DENTIFIER	DEFINITION	IDENTIFIER	
			DDECCUDE C
AAH AAHH	ANALYSIS ALARM — HIGH ANALYSIS ALARM — HIGH—HIGH	PS PSHH	PRESSURE SI
AE	ANALYSIS ELEMENT	PSL	PRESSURE S
AIT	ANALYSIS INDICATING TRANSMITTER (ANALYTIC INST.)	PSV	PRESSURE S
AK ARV	ANALYSIS (AMPLER) CONTROL STATION AIR RELEASE VALVE	PT PY	PRESSURE TE
ASH	ANALYSIS SWITCH — HIGH	SI	SPEED INDICA
ASHH	ANALYSIS SWITCH — HIGH—HIGH	SK	SPEED CONTR
ASY	ANALYSIS SAFETY RELAY	ST	SPEED TRANS
AT BK	ANALYSIS TRANSMITTER (ANALYTIC INST.) BURNER CONTROL STATION	TE TG	TEMPERATURE TEMPERATURE
BS	BURNER FLAME SWITCH	TI	TEMPERATURE
BV	BURNER VALVE	TIC	TEMPERATURE
DE	DENSITY ELEMENT	TIT	TEMPERATURE
DR DT	DENSITY RECORDER DENSITY TRANSMITTER	TR TS	TEMPERATURE TEMPERATURE
DX	DENSITY SOURCE (X = SOURCE)	TSH	TEMPERATURE
EE	VOLTAGE ELEMENT/TRANSFORMER	TSL	TEMPERATURE
El	VOLTAGE INDICATOR	Π	TEMPERATURE
ET	VOLTAGE TRANSMITTER	TV	TEMPERATURE
FE FG	FLOW ELEMENT FLOW METER ULTRASONIC GENERATOR	TW TY	TEMPERATURE TEMPERATURE
FI	FLOW INDICATOR	XE	VELOCITY ELE
FIC	FLOW INDICATING CONTROLLER	XI	VELOCITY IND
FIT	FLOW INDICATING TRANSMITTER	XK	UNCLASSIFIED
FQI	FLOW TOTALIZING INDICATOR	XT	POWER FACTO
FQY FR	FLOW TOTALIZING / INTEGRATING RELAY FLOW RECORDER	XT	VELOCITY TRA
FRC	FLOW RECORDING CONTROLLER	YS	COMPUTER S
FRQ	FLOW RECORDING TOTALIZER	YSA	STATE SAFETY
FSL	FLOW SWITCH LOW	YSL =:	STATE SAFETY
FT FV	FLOW TRANSMITTER FLOW VALVE	ZI ZS	POSITION IND POSITION SWI
FY	FLOW COMPUTER / RELAY	ZSB	POSITION SWI
GE	GAS ELEMENT	ZSD	POSITION SWI
GS	GAS SWITCH MODULE	ZSH	POSITION SWI
HK	HAND CONTROL STATION	ZSL	POSITION SWI
HS HSS	HAND SWITCH HAND SAFETY SWITCH	ZT	POSITION TRA
HV	HAND VALVE	NOTEC E	OD INOTE
IS	CURRENT SWITCH	NOIES F	<u>OR INSTR</u>
<u>IE</u>	CURRENT ELEMENT/TRANSFORMER	1. THE LAS	T IDENTIFIER L
II IY	CURRENT INDICATOR CURRENT RELAY		BLE IS DERIVED
KY	TIMER RELAY	IADLE, A	AND IS NOT EX
LCV	LEVEL CONTROL VALVE		
LE	LEVEL ELEMENT		
LIC LIC	LEVEL INDICATOR LEVEL INDICATING CONTROLLER		
LIT	LEVEL INDICATING CONTROLLER LEVEL INDICATING TRANSMITTER		
LR	LEVEL RECORDER		
LSL	LEVEL SWITCH LOW		
LSH	LEVEL SWITCH HIGH	_	
LSHL LT	LEVEL SWITCH HIGH/LOW LEVEL TRANSMITTER	_	
	LEVEL VALVE		
LV			
LV LY	LEVEL RELAY (I/I CONVERTER)		
LY MB	MOTOR DECREASE OR REVERSE		
LY MB MD	MOTOR DECREASE OR REVERSE MOTOR INCREASE OR FORWARD		
LY MB	MOTOR DECREASE OR REVERSE		
LY MB MD MF	MOTOR DECREASE OR REVERSE MOTOR INCREASE OR FORWARD MOTOR FAILURE		
LY MB MD MF MM MO NS	MOTOR DECREASE OR REVERSE MOTOR INCREASE OR FORWARD MOTOR FAILURE MOTOR RUN MOTOR OVERLOAD MOISTURE SWITCH		
LY MB MD MF MM MO NS PCV	MOTOR DECREASE OR REVERSE MOTOR INCREASE OR FORWARD MOTOR FAILURE MOTOR RUN MOTOR OVERLOAD MOISTURE SWITCH PRESSURE CONTROL VALVE		
LY MB MD MF MM MO NS PCV PE	MOTOR DECREASE OR REVERSE MOTOR INCREASE OR FORWARD MOTOR FAILURE MOTOR RUN MOTOR OVERLOAD MOISTURE SWITCH PRESSURE CONTROL VALVE PRESSURE ELEMENT		
LY MB MD MF MM MO NS PCV	MOTOR DECREASE OR REVERSE MOTOR INCREASE OR FORWARD MOTOR FAILURE MOTOR RUN MOTOR OVERLOAD MOISTURE SWITCH PRESSURE CONTROL VALVE		
LY MB MD MF MM MO NS PCV PE PG	MOTOR DECREASE OR REVERSE MOTOR INCREASE OR FORWARD MOTOR FAILURE MOTOR RUN MOTOR OVERLOAD MOISTURE SWITCH PRESSURE CONTROL VALVE PRESSURE GAUGE		

DEVICE IDEI	NTIFIERS	INSTRUMENT IDENTIFICATION MODIFIER			
DENTIFIER	DEFINITION	IDENTIFIER	DEFINITION		
PS	PRESSURE SWITCH	(N)	N MULTIPLE INSTRUMENTS		
PSHH	PRESSURE SWITCH HIGH (2ND STAGE)	AA	AUDIBLE ALARM		
PSL	PRESSURE SWITCH LOW	A/M	AUTO / MANUAL		
PSV	PRESSURE SAFETY VALVE (RELIEF)	A/0/T	AUTO / OFF / TEST		
PT	PRESSURE TRANSMITTER	C/H	COMPUTER / HAND		
PY	PRESSURE RELAY (I/I CONVERTER)	'			
SI	SPEED INDICATOR	C/L	COMPUTER / LOCAL		
SK	SPEED CONTROL STATION	CLS	CLOSE		
ST	SPEED TRANSMITTER	C/O	COMPUTER / OFF		
TE	TEMPERATURE ELEMENT	COB	COMPUTER / OFF / BYPASS		
TG	TEMPERATURE GAUGE	СОН	COMPUTER / OFF / HAND		
TI	TEMPERATURE INDICATOR	COT	COMPUTER / OFF / TIME		
TIC	TEMPERATURE INDICATING CONTROLLER	DCS	DISTRIBUTED CONTROL SYSTEM		
TIT	TEMPERATURE INDICATING TRANSMITTER	DS	DECREASE SPEED		
TR	TEMPERATURE RECORDER	E/R	EXTEND / RETRACT		
TS	TEMPERATURE SWITCH	E/S	EMERGENCY STOP		
TSH	TEMPERATURE SWITCH HIGH	ETM	ELAPSED TIME METER		
TSL	TEMPERATURE SWITCH LOW	FOR	FORWARD / OFF / REVERSE		
TT	TEMPERATURE TRANSMITTER	H/A	HAND / AUTO		
TV	TEMPERATURE VALVE	HOA	HAND / OFF / AUTO		
TW	TEMPERATURE THERMOWELL	HOR	HAND / OFF / REMOTE		
TY	TEMPERATURE RELAY (SOLENOID VALVE OR M/P)	I/D	INCREASE / DECREASE		
XE	VELOCITY ELEMENT	INT/EXT	INTERNAL / EXTERNAL		
XI	VELOCITY INDICATOR	IS	INCREASE SPEED		
XK	UNCLASSIFIED CONTROL STATION (X = FIRE)	LCP	LOCAL CONTROL PANEL		
XT	POWER FACTOR TRANSMITTER	LD	LOCKABLE DISCONNECT		
XT	VELOCITY TRANSMITTER $(X = VELOCITY)$	LJB	LOCAL JUNCTION BOX		
XX	UNCLASSIFIED (XX = ALARM ANNUNCIATOR)	L/0	LOCAL / OFF		
YS	COMPUTER SWITCH	LOR	LOCAL / OFF / REMOTE		
YSA	STATE SAFETY ALARM	LOS	LOCK OFF STOP		
YSL	STATE SAFETY LIGHT	L/R	LOCAL / REMOTE		
ZI	POSITION INDICATOR	LSR	LOCAL / STOP / REMOTE		
ZS	POSITION SWITCH	MCC	MOTOR CONTROL CENTER		
ZSB	POSITION SWITCH CLOSED (LIMIT SWITCH)	0/A	OFF / AUTO		
ZSD	POSITION SWITCH OPEN (LIMIT SWITCH)	0/C	OPEN / CLOSE		
ZSH	POSITION SWITCH HIGH	O/M	OFF / MAINTENANCE		
ZSL	POSITION SWITCH LOW	0/0	OFF / ON		
ZT	POSITION TRANSMITTER	OPN	OPEN		
		RST	RESET		
		RTD	RESISTIVE TEMPERATURE DEVICE		
NOTES FO	<u>OR INSTRUMENT FIELD DEVICE IDENTIFIERS:</u>	SEL	SELECTOR		
1 THE LAS	T IDENTIFIER LETTER IS IN SOME CASES OPTIONAL (EG. FSL)	S/F	SLOW / FAST		
	, ,	SOFA	SLOW / OFF / FAST / AUTO		
	BLE IS DERIVED FROM THE INSTRUMENT & DEVICE IDENTIFICATION AND IS NOT EXHAUSTIVE.	SOL	SOLENOID		
IADEL, A	IND IO HOT EMMOORITE.	S/S	START / STOP		
		S/W	SUMMER / WINTER		
		TAH	TEMPERATURE ALARM HIGH		
		TAL	TEMPERATURE ALARM LOW		
		TSH	TEMPERATURE SWITCH HIGH		
		TSL	TEMPERATURE SWITCH LOW		
		T/C	THERMOCOUPLE		
		VIB	VIBRATION		

INSTRUMENT FIELD **DEVICE NUMBERING** INSTRUMENT IDENTIFICATION MODIFIER —— LOOP OR DEVICE NUMBER (001-999) - INSTRUMENT ID - MAX. OF 4 LETTERS AS PER IDENTIFICATION TABLE - DEVICE SUFFIX FOR MULTIPLE DEVICES ON THE SAME LOOP CONTROL SYSTEM (DCS) POINT TAG NUMBERING - COMPUTER SYSTEM EQUIPMENT LOCATION IDENTIFIER (2 LETTERS) — LOOP OR DEVICE NUMBER (001 - 999) — INSTRUMENT OR DEVICE IDENTIFICATION - PROCESS AREA IDENTIFIER PLC POINT TAG **NUMBERING**

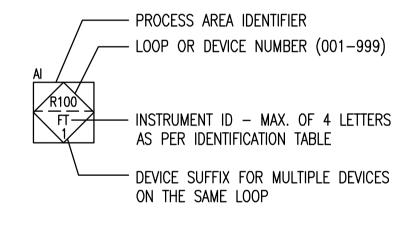

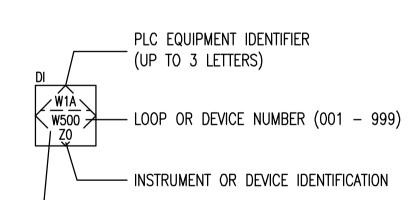

- PROCESS AREA IDENTIFIER

METRIC WHOLE NUMBERS INDICATE MILLIMETRES DECIMALIZED NUMBERS INDICATE METRES



LOCATION APPROVED UNDERGROUND STRUCTURES	B.M ELE
SUPV. U/G STRUCTURES DATE	
COMMITTÉE NOTE:	
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN	
THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT	2.
LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.	1.
BEFORE PROCEEDING WITH CONSTRUCTION.	NO.

CATION APPROVED ERGROUND STRUCTURES	B.M. ELEV.			Stantec Consulting Ltd. 905 Waverley Street, Winnipeg, Manitoba				ENGINEER'S SEAL	
U/G STRUCTURES DATE					Stantec	T-1 204	erley Street, Wini 489-5900 Fax	nipeg, Manitoba 204—453—9012	ORIGINAL
E:					DESIGNED BY	B.S.J.	CHECKED BY	S.T.	SEALED BY B.S. JANZ
ON OF UNDERGROUND STRUCTURES AS ARE BASED ON THE BEST INFORMATION BLE BUT NO GUARANTEE IS GIVEN ALL EXISTING UTILITIES ARE SHOWN OR					DRAWN BY	D.K.G.	APPROVED BY	S.K.B.	P. ENG.
THE GIVEN LOCATIONS ARE EXACT. MATION OF EXISTENCE AND EXACT ON OF ALL SERVICES MUST BE	2.	ISSUED FOR TENDER	12.11.01		HOR. SCALE: VERTICAL:	_	RELEASED FOR		12/10/31
ED FROM THE INDIVIDUAL UTILITIES PROCEEDING WITH CONSTRUCTION.	1. NO.	REVISIONS REVIEW	12.07.25 DATE	D.K.G BY	DATE 2012.0)1.23	DATE		BID OPPORTUNITY NO.

IGINEER'S SEAL THE CITY OF WINNIPEG WATER AND WASTE DEPARTMENT Winnipeg ORIGINAL

NORTH END WATER POLLUTION CONTROL CENTRE REHABILITATION OF DIGESTER #II AND SLUDGE HOLDING TANKS No. 5 AND No. 7

PROCESS & INSTRUMENTATION DIAGRAM LEGEND & DETAILS-2 I-0101D-A0081-002 29 19

__/__