

ROOM FINISH AND WINDOW SCHEDULES											
ROOM NO.	ROOM NAME	FLOOR	BASEBOARD	NORTH WALL	SOUTH WALL	EAST WALL	WEST WALL	CEILING	CEILING HEIGHT	WINDOW TYPE	NOTES
G-01	FITNESS ROOM	TYPE 2	R.BB. 2	---	---	---	---	---	---	W1	
G-02	LOUNGE	TYPE 2	R.BB. 2	---	---	---	---	---	---	W1	
G-03	RECREATION & KITCHEN	TYPE 2	R.BB. 2	PT-1	PT-1	PT-1	PT-1	PT-1	---	W2	
G-04	LIEUTENANT	TYPE 2	R.BB. 2	---	---	---	---	---	---	W1	
G-05	LIEUTENANT	TYPE 2	R.BB. 2	---	---	---	---	---	---	W1	
G-06	CAPTAIN	TYPE 2	R.BB. 2	---	---	---	---	---	---	---	
G-07	STORAGE ROOM	TYPE 2	R.BB. 2	---	---	---	---	---	---	---	
G-08	ENTRANCE/STAIRS	TYPE 2	R.BB. 2	---	---	---	---	---	---	---	
G-09	CONTROL ROOM	TYPE 2	R.BB. 2	---	---	---	---	---	---	---	
G-10	RECEPTION	TYPE 2	R.BB. 2	---	---	---	---	---	---	---	
G-11	TELEPHONE	TYPE 2	R.BB. 2	---	---	---	---	---	---	---	
G-12	WASHROOM	TYPE 2	R.BB. 2	---	---	---	---	---	---	---	
G-13	CLEANING	TYPE 2	R.BB. 2	---	---	---	---	---	---	---	
G-14	PAPER STORAGE	TYPE 2	R.BB. 2	---	---	---	---	---	---	---	
G-15	CORRIDOR	TYPE 2	R.BB. 2	---	---	---	---	---	---	---	
G-16	WASHROOM	TYPE 1	R.BB. 1	---	---	---	---	---	---	---	
G-17	SHOWER ROOM	TYPE 2	R.BB. 2	---	---	---	---	---	---	---	
G-18	DRYING ROOM	TYPE 2	R.BB. 2	---	---	---	---	---	---	---	
G-19	LOCKER ROOM	TYPE 2	R.BB. 2	---	---	---	---	---	---	---	
G-20	DORMITORY	TYPE 2	R.BB. 2	---	---	---	---	---	---	W1	
G-21	CORRIDOR	TYPE 2	R.BB. 2	---	---	---	---	---	---	---	
G-22	VESTIBULE	TYPE 2	R.BB. 2	---	---	---	---	---	---	---	
G-24	HOSE TOWER	EXIST	R.BB. 1	---	---	---	---	---	---	---	
G-25	APPARATUS ROOM	EXIST	R.BB. 1	---	---	---	---	---	---	---	

ABBREVIATIONS

TBD (TO BE DETERMINED) R.BB. 1: EXISTING 4" GREY RUBBER BASEBOARD PT-1: PAINT & COLOUR (TBD)
 R.BB. 2: NEW 4" GREY RUBBER BASEBOARD (SUBMIT SAMPLES)
 TYPE 1: EXISTING VINYL TILE 12"x12" W/ 4" RUBBER BASE
 TYPE 2: NEW RESINOUS FLOORING, SEE SPECIFICATION

WINDOW TYPES - ALL WINDOWS TO BE TRI-PANE, FIBERGLAS
 APPROVED SUGGESTED SUPPLIER - "SILEX FIBERGLAS WINDOWS" OF WINNIPEG

W1: CASEMENT WITH RIGHT SIDE FIXED
 W2: UPPER FIXED WITH LOWER 24" MINIMUM AWNING

SECTION 09 67 23. RESINOUS FLOORING
 PART 1 - GENERAL

- 1.0 SUMMARY
 .1 FLOOR TO HAVE A TWO-COMPONENT GENERAL SERVICE 100% SOLIDS EPOXY COATING WITH DECORATIVE BROADCAST FLAKES, A TWO-COMPONENT 100% SOLIDS CLEAR SEALER TO BE APPLIED AFTERWARDS. RESINOUS COVES INCLUDES PENETRATING, MOISTURE TOLERANT, TWO-COMPONENT EPOXY PRIMER, A HIGH PERFORMANCE, THREE-COMPONENT MORTAR CONSISTING OF EPOXY RESIN, CURING AGENT AND SELECTED, GRADED AGGREGATES BLENDED WITH INORGANIC PIGMENTS AND A TWO-COMPONENT, GENERAL SERVICE EPOXY COATING, DECORATIVE FLAKES TO BE BROADCASTED WITHIN THE EPOXY COATING.
- 1.1 SUBMITTALS
 .1 PRODUCT DATA: SUBMIT MANUFACTURER'S TECHNICAL DATA, INSTALLATION INSTRUCTIONS, AND GENERAL RECOMMENDATIONS FOR EACH RESINOUS FLOORING MATERIAL REQUIRED. INCLUDE CERTIFICATION INDICATING COMPLIANCE OF MATERIALS WITH REQUIREMENTS.
 .2 SAMPLES: SUBMIT 4-INCH SQUARE SAMPLES OF EACH TIME OF RESINOUS FLOORING REQUIRED, APPLIED TO A RIGID BACKING, IN COLOUR AND FINISH INDICATED
 .1 FOR INITIAL SELECTION OF COLOURS AND FINISHES, SUBMIT MANUFACTURER'S COLOUR CHARTS SHOWING FULL RANGE OF COLOURS AND FINISHES AVAILABLE
- 1.2 QUALITY ASSURANCE
 .1 ECOPOXY OR APPROVED EQUAL IN ACCORDANCE WITH B7.
 .2 ISO 9002: ALL MATERIALS, INCLUDING PRIMERS, RESINS, CURING AGENTS, FINISH COATS, AGGREGATES AND SEALANT ARE MANUFACTURED AND TESTED UNDER AND ISO 9002 REGISTERED QUALITY SYSTEM.
- 1.3 DELIVERY, STORAGE, AND HANDLING
 .1 MATERIAL SHALL BE DELIVERED TO JOB SITE AND CHECKED BY FLOORING CONTRACTOR FOR COMPLETENESS AND SHIPPING DAMAGE PRIOR TO JOB START.
 .2 ALL MATERIALS USED SHALL BE FACTORY PRE-WEIGHED AND PRE-PACKAGED IN SINGLE, EASY TO MANAGE BATCHES TO ELIMINATE SITE MIXING ERRORS. NO ON SITE WEIGHING OR VOLUMETRIC MEASUREMENTS ALLOWED
 .3 MATERIAL SHALL BE STORED IN A DRY, ENCLOSED AREA PROTECTED FROM EXPOSURE TO MOISTURE. TEMPERATURE OF STORAGE AREA SHALL BE MAINTAINED BETWEEN 16 AND 30 DEGREES CELSIUS (60-85F)
- 1.4 PROJECT CONDITIONS
 .1 JOB AREA TO BE FREE OF OTHER TRADES AND FOOT TRAFFIC DURING, AND FOR A PERIOD OF 24 HOURS AFTER, FLOOR INSTALLATION
 .2 PROTECTION OF FINISHED FLOOR FROM DAMAGE BY SUBSEQUENT TRADES SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.
- 1.5 WARRANTY
 .1 MANUFACTURER SHALL FURNISH A SINGLE, WRITTEN WARRANTY COVERING BOTH MATERIAL AND WORKMANSHIP FOR A PERIOD OF ONE (1) YEAR FROM DATE OF INSTALLATION
- PART 2 - PRODUCTS
 2.0 COLOURS
 .1 COLOURS AS SELECTED BY CONTRACT ADMINISTRATOR FROM MANUFACTURER'S STANDARD COLOURS
- 2.1 EPOXY FLOORING
 .1 ECOPOXY FLOOR COATING, HIGH BUILD EPOXY CONCRETE FLOOR COATING, 100% SOLIDS, 2 COMPONENT EPOXY
 .2 ECOPOXY GRIP COAT, HIGH BUILD EPOXY SLIP RESISTANT COATING, 3 DIFFERENT SIZE AGGREGATED ADDED TO ECOPOXY GRIP COAT
 .3 ECOPOXY PRIMER, TESTED TO ASTM F2170 OR ASTM F1889
 .4 ALL PRODUCTS TO BE INSTALLED USING MANUFACTURER'S SPECIFICATIONS
- 2.2 JOINT SEALANT MATERIALS
 .1 TYPE PRODUCED BY MANUFACTURER OF RESINOUS FLOORING SYSTEM FOR TYPE OF SERVICE AND JOINT CONDITION INDICATED.
- PART 3 - EXECUTION
 3.0 PREPARATION
 .1 REPAIR CRACKS AND SURFACE DEFECTS PRIOR TO INSTALLATION
 .2 CONCRETE PREPARATION SHALL BE BY MECHANICAL MEANS AND INCLUDE USE OF A SCABBLER, SCARIFIER OR SHOT BLAST MACHINE FOR REMOVAL OF BOND INHIBITING MATERIALS SUCH AS CURING COMPOUNDS OR LAITANCE.
- 3.1 APPLICATION
 .1 GENERAL: APPLY EACH COMPONENT OF RESINOUS FLOORING SYSTEM IN COMPLIANCE WITH MANUFACTURER'S DIRECTIONS TO PRODUCE A UNIFORM MONOLITHIC WEARING SURFACE OF THICKNESS INDICATED, UNINTERRUPTED EXCEPT AT DIVIDER STRIPS, SAWN JOINTS OR OTHER TYPES OF JOINTS (IF ANY), INDICATED OR REQUIRED
 .2 PRIMER: MIX AND APPLY PRIMER OVER PROPERLY PREPARED SUBSTRATE WITH STRICT ADHERENCE TO MANUFACTURER'S INSTALLATION PROCEDURES AND COVERAGE RATES. COORDINATE TIMING OF PRIMER APPLICATION WITH APPLICATIONS OF TROWELED MORTAR TO ENSURE OPTIMUM ADHESION BETWEEN RESINOUS FLOORING MATERIALS AND SUBSTRATE
 .3 TROWELED MORTAR: MIX MORTAR MATERIAL ACCORDING TO MANUFACTURER'S RECOMMENDED PROCEDURES. UNIFORMLY SPREAD MORTAR OVER SUBSTRATE USING MANUFACTURER'S SPECIALLY DESIGNED SCREED BOX ADJUSTED TO MANUFACTURER'S RECOMMENDED HEIGHT. HAND TROWEL APPLY MIXED MATERIAL OVER FRESHLY PRIMED SUBSTRATE USING STAINLESS STEEL FINISHING TROWELS.
 .4 COATING: REMOVE ANY SURFACE IMPERFECTIONS BY LIGHTLY ABRADING AND VACUUM IN THE FLOOR SURFACE. MIX, SQUEEGEE APPLY AND BACKROLL COATING WITH STRICT ADHERENCE TO MANUFACTURER'S INSTALLATION PROCEDURES AND COVERAGE RATES
- 3.2 FIELD QUALITY CONTROL
 .1 THE RIGHT IS RESERVED TO INVOKE THE FOLLOWING MATERIAL TESTING PROCEDURE AT ANY TIME, AND ANY NUMBER OF TIMES DURING THE PERIOD OF FLOORING APPLICATION.
 .2 THE CITY WILL ENGAGE SERVICE OF AN INDEPENDENT TESTING LABORATORY TO SAMPLE MATERIALS BEING USED ON THE JOB SITE. SAMPLES OF MATERIAL WILL BE TAKEN, IDENTIFIED AND SEALED, AND CERTIFIED IN PRESENCE OF CONTRACTOR.
 .3 TESTING LABORATORY WILL PERFORM TESTS FOR ANY OF CHARACTERISTICS SPECIFIED, USING APPLICABLE TESTING PROCEDURES REFERENCED HEREIN, OR IF NONE REFERENCED, IN MANUFACTURER'S PRODUCT DATA.
 .4 IF TEST RESULTS SHOW MATERIALS BEING USED DO NOT COMPLY WITH SPECIFIED REQUIREMENTS, CONTRACTOR MAY BE DIRECTED BY CONTRACT ADMINISTRATOR TO STOP WORK; REMOVE NON-COMPLYING MATERIALS. PAY FOR TESTING, REAPPLY FLOORING MATERIALS TO PROPERLY PREPARED SURFACES WHICH HAD PREVIOUSLY BEEN COATED WITH UNACCEPTABLE MATERIALS.
- 3.3 CURING, PROTECTION, AND CLEANING
 .1 CURE RESINOUS FLOORING MATERIALS IN COMPLIANCE WITH MANUFACTURER'S DIRECTIONS, TAKING CARE TO PREVENT CONTAMINATION DURING STAGES OF APPLICATION AND PRIOR TO COMPLETION OF CURING PROCESS. CLOSE AREA OF APPLICATION FOR A MINIMUM OF 24 HOURS.
 .2 PROTECT RESINOUS FLOORING MATERIALS FROM DAMAGE AND WEAR DURING CONSTRUCTION OPERATION. WHERE TEMPORARY COVERING IS REQUIRED FOR THIS PURPOSE, COMPLY WITH MANUFACTURER'S RECOMMENDATIONS FOR PROTECTIVE MATERIALS AND METHOD OF APPLICATION. CONTRACTOR IS RESPONSIBLE FOR PROTECTION AND CLEANING OF SURFACES AFTER FINAL COATS.
 .3 CLEANING: REMOVE TEMPORARY COVERING AND CLEAN RESINOUS FLOORING JUST PRIOR TO FINAL INSPECTION. USE CLEANING MATERIALS AND PROCEDURES RECOMMENDED BY RESINOUS FLOORING MANUFACTURER.

SPECIFICATIONS:

S.S. - STAINLESS STEEL
 SUBMIT SHOP DRAWINGS FOR APPROVAL

PLUMBING:
 STAINLESS SINKS
 • 18GA S.S. T304#4 MINIMUM - ALL COVERED WELDED INTEGRAL INTO COUNTERTOP - WELDS CLEANED AND POLISHED TO BLEND WITH S.S. TOP.
 • SEE SIZES ON DRAWING
 • 3 1/2" S.S. STRAINER ASSEMBLIES C/W 1 1/2" DRAIN

FAUCET
 STRAIGHT ARM SPOUT WITH PULL-DOWN SPRAY SPOUT FAUCET: ANCONA LE DUO KITCHEN FAUCET MODEL No. AN-4103

STAINLESS COUNTERTOPS C/W BASE CABINET
 • 18GA S.S. T304#4 TOP - 4" BOXED BACK RISER
 • COUNTERTOP TO HAVE MARINE EDGE - FRONT & ENDS
 • 18GA S.S. BASE AND INTERMEDIATE SHELVES
 • INTERMEDIATE SHELVES TO BE ADJUSTABLE WITH STAINLESS PILASTER STRIPS AND CLIPS
 • CABINET ENDS AND DIVIDERS TO BE 20GA S.S. T304#4 FINISH
 • BACK PANEL - 20GA S.S. T304#4
 • REINFORCING 16GA SATINCOAT C - SECTION, DOUBLE - FACE TAPE TO TOP (3 REQ'D)
 • 16GA SATINCOAT OR GALVANIZED SUPPORT CHANNELS FOR BASE SHELF
 • 1 5/8" OD - 16GA S.S. ORNAMENTAL TUBULAR LEGS
 • S.S. ADJ. BULLET FEET
 • 16GA S.S. T304#4 REMOVABLE S.S. KICK PLATE - FRONT & ENDS
 • 16GA S.S. SKIRTING TO COVER FRONTS OF SINKS

STAINLESS DRAWERS
 • DOUBLE PAN CONSTRUCTION - FRONT - 18GA S.S. T304#4
 • 1" INSULATION BETWEEN PANS
 • 16GA S.S. T304#4 DRAWER PAN x 8" DEEP FASTENED TO THE BACK PAN OF THE DRAWER FRONT
 • STAINLESS DRAWER SLIDES x 20" LONG - FULL EXTENSION WEIGHT CAPACITY 80-100 lbs
 • DRAWER HOUSING - 16GA S.S. T304#4
 • FASTEN DRAWERS TO UNDERSIDE OF STAINLESS TOP

WALL MOUNTED SHELVES - CABINET STYLE
 • 18GA S.S. T304#4 BODY, TOP AND SHELVES
 • SHELVES TO BE ADJUSTABLE C/W S.S. PILASTER STRIP AND CLIPS

ISLAND S.S. TABLE
 • 14GA S.S. T304#4 TOP
 • REINFORCING 16GA SATINCOAT C - SECTION, DOUBLE - FACE TAPE TO TOP (3 REQ'D)
 • 3"x3" SQUARE S.S. T304#4 TUBULAR LEGS x 16GA WALL ORNAMENTAL FINISH
 • S.S. ADJ. LEVELLERS
 • 1" DIA S.S. T304#4 - 16GA WALL ORNAMENTAL CROSS BRACES FRONT, BACK, AND SIDES - 15" DOWN


APPLIANCES
 GAS RANGE
 CAPITAL
 36" WIDE, 4 OPEN BURNERS WITH CENTRE 12" GRILL/ GRIDDLE BURNER
 MODEL: MCR364B

VENTILATION CANOPY
 VENTAHOOD
 48" WIDE (800 CFM)
 MODEL: PRXH18-348

DISHWASHER
 ASKO DISHWASHERS INC.
 24" BUILT-IN - INTEGRATED HANDLE
 MODEL: D5436XLS

NOTE:
 1. APPROVED SUGGESTED SUPPLIER STAINLESS STEEL FABRICATOR CONTRACTOR - "STAINLESS CONCEPTS INC."
 2. APPROVED SUGGESTED SUPPLIER EPOXY FLOOR CONTRACTOR - "BURR BUILDING"

0	ISSUE FOR CONSTRUCTION	JKR/DTA	2017
No.	REVISION/DESCRIPTION	BY	DATE

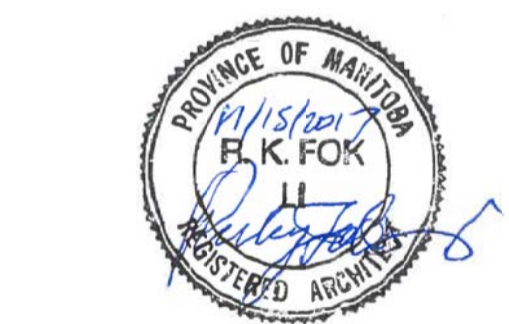

JKR/DTA	CHECKED	DESIGNED	APPROVED
DATE 2017.11.15	USER	APPROVAL	

Winnipeg THE CITY OF WINNIPEG
 PLANNING, PROPERTY AND
 DEVELOPMENT DEPARTMENT
 MUNICIPAL ACCOMMODATIONS DIVISION
 3-65 GARRY STREET, R3C 4K4

PROJECT
 WINNIPEG FIRE PARAMEDIC SERVICES
 FIRE STATION #2
 INTERIOR RENOVATIONS
 55 WATT STREET BID OPP: 1013-2017

SHEET TITLE
 SPECIFICATIONS, SCHEDULES
 WINDOW TYPES

SCALE	PROJECT No:	SHEET No:
AS SHOWN	2016-007	A3