

MECHANICAL EQUIPMENT SCHEDULE		
LABEL	FIXTURE	SPECIFICATION
EF-1	EXHAUST FAN	GREENHECK EXHAUST FAN #SE1-12-432-VG, DISCHARGE HOOD C/W BIRDSCREEN, INLET SAFETY SCREEN & BDD. OR APPROVED EQUAL IN ACCORDANCE WITH B7.
F/A-1	INTAKE LOUVER	750x500 O/A INTAKE LOUVER C/W BIRD SCREEN. LOUVER TO BE EH PRICE ZE445. INTAKE C/W UPTURNED ELBOW OPEN ENDED AT HIGH LEVEL (OR APPROVED EQUAL IN ACCORDANCE WITH B7).

**GENERAL HVAC NOTES:**


1. COLOUR OF LOUVERS TO BE CONFIRMED BY ARCHITECT.
2. CONTRACTOR TO COORDINATE ALL CONTROLS FOR HEATING & COOLING.

PLUMBING FIXTURE ROUGH-IN	
PLUMBING FIXTURE	DCW
HOSE REEL	50MM Ø
WATER METER (WM)	38MM Ø

**GENERAL PLUMBING NOTES:**

1. TRENCH AND WATER PIPE INSTALLATION MUST COMPLY WITH CURRENT EDITION OF CITY OF WINNIPEG STANDARD DETAILS FOR UNDERGROUND WORKS - REFER TO CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS

NOTE:  
CITY OF WINNIPEG WILL NOT ENTERTAIN ADDITIONAL COSTS PERTAINING TO WATER SITE SERVICING.  
CONTRACTOR TO ENSURE BID PRICE INCLUDES ALL NECESSARY ELEMENTS TO INCORPORATE CODECOMPLIANT AND COMPLETE INFRASTRUCTURE ON SITE.

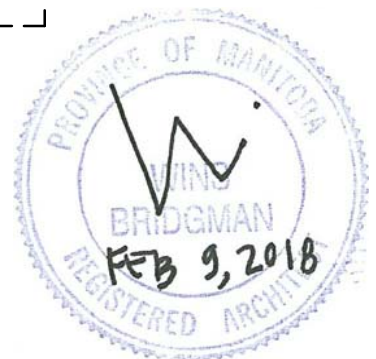

1 MECHANICAL HVAC PLAN  
1 : 50