


REFERENCE LEGEND -SEE DRAWING 33 FOR GRADING -SEE DRAWING 43/44 FOR PROFILES

METRIC WHOLE NUMBERS INDICATE MILLIMETRES DECIMALIZED NUMBERS INDICATE METRES

· · · ·	GAS		0	MANHOLE	•		CONCRETE PAVEMENT		LOCATION APPROVED	GBM	Λ - 55-015							PROFESSIONAL'S
	MTS / PEDESTAL			CATCH BASIN / CATCH PIT			CONC SIDEWALK / MEDIAN		UNDERGROUND STRUCTURES	ELE\	V - 233.170			m				A DE OF
——————————————————————————————————————	HYDRO / CABINET		Δ	CURB INLET WITH BOX			ASPHALT PAVEMENT								MORR	ISON HER	SHFIELD	OVINCEO
	CATV / FIBRE OPTIC		\odot	TREE			ASPHALT PAV'T WIDENING		SUPR, U/G STRUCTURES DATE			_	_					3
· · _©_	TRAFFIC SIGNALS / PIT		🕂 TH-12	TEST HOLE			PAVING STONE											ן ∦ _ת (R.
	LAND DRAINAGE SEWER	— - —		PROPERTY LINE			GRAVEL		LOCATION OF UNDERGROUND STRUCTURES	_				DESIGNED BY	WRJ	CHECKED BY	RPB	
	SANITARY/COMBINED SEWER		<u></u>	SURVEY BAR			RAMP CURB		AS SHOWN ARE BASED ON THE BEST					DRAWN				
	CB LEAD / SSP / DCP		××	FENCE			PLANING / REMOVAL		 INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING 					BY	DID	APPROVED BY	BWB	A PED
·	WATER MAIN			BOC / EDGE OF PAVEMENT		,			UTILITIES ARE SHOWN OR THAT THE GIVEN – LOCATIONS ARE EXACT. CONFIRMATION OF	С	ISSUED FOR TENDER	19/03/22	RPB			RELEASED FOR C	ONSTRUCTION	PROF
	SUBDRAIN		33.000	ELEVATION	(33.333)				EXISTENCE AND EXACT LOCATION OF ALL	В	ISSUED FOR CLIENT REVIEW	19/02/15	6 RPB	HOR SCALE	1:500			CONSULTA
4	DITCH	▲	- 0 -	TRAFFIC SIGN					SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING	А	ISSUED FOR 66% CLIENT REVIEW	18/12/21	RPB	VERT SCALE	1:20	_	N/A	1804191-17-F
EXISTING	LEGEND - PLAN	NEW	EXISTING	LEGEND - PLAN	NEW	EXISTING	LEGEND - PLAN	NEW	WITH CONSTRUCTION.	No.	REVISIONS	YY/MM/DD	D BY	DATE	19/03/22	DATE		1004191-17-Fe

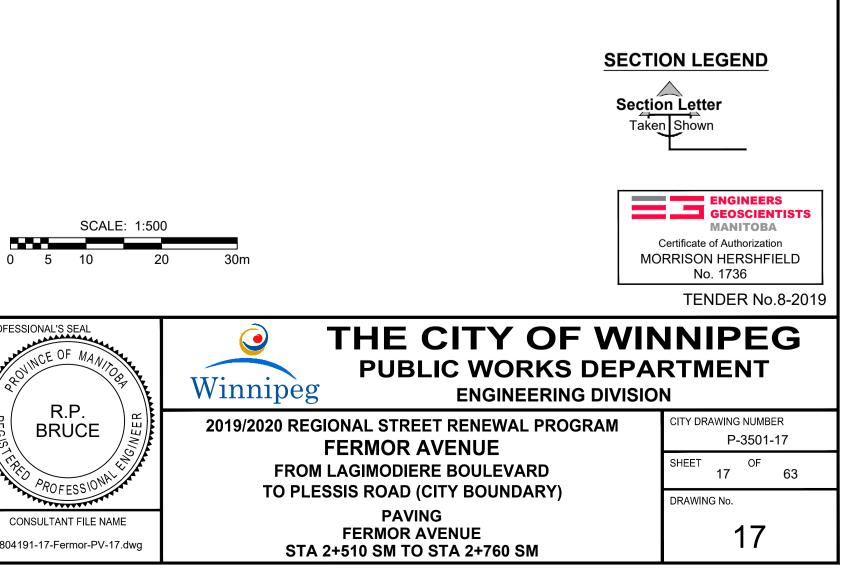

- 12. LEGAL PLAN AND UNDERGROUND INFORMATION FROM CITY OF WINNIPEG LBIS.
- DIRECTED BY THE CONTRACT ADMINISTRATOR. 11. ISOLATE MISCELLANEOUS ITEMS IN NEW CONCRETE WORKS AS PER SD-228C.
- 10. CB LEADS TO BE INSTALLED AT MIN 1.0% SLOPE OR AS
- 9. INSTALL 6.000m OF 150mm SUBDRAIN TO CATCH BASINS IN BOTH DIRECTIONS PARALLEL TO ROADWAY AS PER SD-045 AND CAP ENDS.
- BY THE CONTRACT ADMINISTRATOR.
- CONSTRUCTION SPECIFICATIONS. 8. ALL BOULEVARDS TO BE SEEDED UNLESS NOTED OTHERWISE. LIMITS TO BE INDENTIFIED IN THE FIELD
- 7. ALL WORK AND MATERIALS TO BE IN ACCORDANCE WITH LATEST REVISION OF THE CITY OF WINNIPEG STANDARD
- 6. ALL DIMENSIONS TO BACK OF CURB AND THEORETICAL BACK OF CURB.
- 5. CB SD-024 OFFSETS ARE DIMENSIONED TO BOC. CB SD-025 OFFSETS ARE DIMENSIONED O/C.
- 4. ADD 200.000m TO ABBREVIATED ELEVATIONS TO OBTAIN GEODETIC ELEVATIONS.
- INTERSECTION RADII, BACK LANE RADII AND BULLNOSES. 3. CONTRACTOR TO CONFIRM THE LOCATION OF ALL UTILITIES/SERVICES IN THE FIELD PRIOR TO CONSTRUCTION.
- NOTES 1. ADJUST MH'S,CB RIMS, WV'S AND HYD'S TO NEW GRADES. 2. MODIFIED BARRIER CURB TO BE CONSTRUCTED AT ALL