


REFERENCE LEGEND -SEE DRAWING 24 FOR GRADING -SEE DRAWING 34 FOR PROFILES

## METRIC WHOLE NUMBERS INDICATE MILLIMETRES DECIMALIZED NUMBERS INDICATE METRES

| GAS O MANHOLE O CONCRETE PAVEMENT LOCATION APPROVED GBM - 55-015  |                           |   |
|---|---------------------------|---|
|   |                           | PROFESSIONAL'S SEAL   |
| MTS / PEDESTAL D CATCH BASIN / CATCH PIT I CONC SIDEWALK / MEDIAN UNDERGROUND STRUCTURES  |                           | DE OF MAL   |
| b 母 HYDRO / CABINET △ CURB INLET WITH BOX ▲ ASPHALT PAVEMENT MOR  | RRISON HERSHFIELD         | WINCE OF MANING   |
| CATV / FIBRE OPTIC 🖸 TREE CONTINES TREE CATV / FIBRE OPTIC TREE TREE CATV / FIBRE OPTIC TREE CATV / F |                           | 3 2 X   |
| PAVING STONE  |                           | $\left  \frac{1}{\sqrt{2}} \right  = \left  \frac{1}{\sqrt{2}} \right $ |
| Note: Designed   Note: Note:  |                           | BRUCE   |
| SANITARY/COMBINED SEWER SANITARY/COMBINED SEWER + + SURVEY BAR _ RAMP CURB AS SHOWN ARE BASED ON THE BEST   | BY                        | IS I  |
| Red / SSP / DCP    FENCE   PLANING / REMOVAL   INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING   DRAWN BY   DID   | APPROVED<br>BY BWB        |   |
|   | Ы                         | PROFESSIONA   |
| LOCATIONS ARE EXACT. CONFIRMATION OF C ISSUED FOR TENDER 19/03/22 RPB HOR SCALE 1/500   | RELEASED FOR CONSTRUCTION | THE FEFTERE   |
| SERVICES MUST BE OBTAINED FROM THE  | N/A                       | CONSULTANT FILE NAME  |
| 5 - DITCH - DITCH - INDIVIDUAL UTILITIES BEFORE PROCEEDING A ISSUED FOR 66% CLIENT REVIEW 18/12/21 RPB 1.20   |                           | 1804191-8-Fermor-PV-8.dw  |
| EXISTING LEGEND - PLAN NEW 01H CONSTRUCTION. No. REVISIONS YY/MM/DD BY DATE 19/03/22   | 22 DATE                   |   |

0 5 10

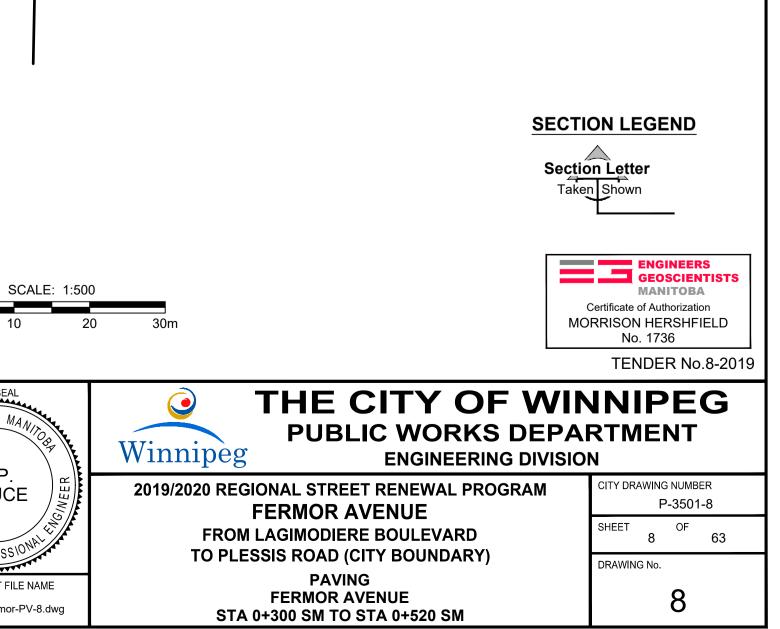

- FROM CITY OF WINNIPEG LBIS.
- WORKS AS PER SD-228C. 12. LEGAL PLAN AND UNDERGROUND INFORMATION
- DIRECTED BY THE CONTRACT ADMINISTRATOR. 11. ISOLATE MISCELLANEOUS ITEMS IN NEW CONCRETE
- SD-045 AND CAP ENDS. 10. CB LEADS TO BE INSTALLED AT MIN 1.0% SLOPE OR AS
- 9. INSTALL 6.000m OF 150mm SUBDRAIN TO CATCH BASINS IN BOTH DIRECTIONS PARALLEL TO ROADWAY AS PER
- BY THE CONTRACT ADMINISTRATOR.
- OTHERWISE. LIMITS TO BE INDENTIFIED IN THE FIELD
- CONSTRUCTION SPECIFICATIONS. 8. ALL BOULEVARDS TO BE SEEDED UNLESS NOTED
- 7. ALL WORK AND MATERIALS TO BE IN ACCORDANCE WITH LATEST REVISION OF THE CITY OF WINNIPEG STANDARD
- BACK OF CURB.
- OFFSETS ARE DIMENSIONED O/C. 6. ALL DIMENSIONS TO BACK OF CURB AND THEORETICAL
- TO OBTAIN GEODETIC ELEVATIONS. 5. CB SD-024 OFFSETS ARE DIMENSIONED TO BOC. CB SD-025
- UTILITIES/SERVICES IN THE FIELD PRIOR TO CONSTRUCTION. 4. ADD 200.000m TO ABBREVIATED ELEVATIONS
- INTERSECTION RADII, BACK LANE RADII AND BULLNOSES. 3. CONTRACTOR TO CONFIRM THE LOCATION OF ALL
- 1. ADJUST MH'S,CB RIMS, WV'S AND HYD'S TO NEW GRADES. 2. MODIFIED BARRIER CURB TO BE CONSTRUCTED AT ALL

NOTES