

BASMENT FLOOR PLAN
SCALE: 1 : 40

LEGEND:

- EXISTING
- - - DEMOLITION

DEMOLITION NOTES:

- (A) DISCONNECT AND REMOVE EXISTING BASEMENT ELECTRIC UNIT HEATER, DISCONNECT ALL WIRING AND ASSOCIATED CONTROLS.
- (B) DISCONNECT AND REMOVE EXISTING FLOW METER (TRANSMITTER), DISCONNECT ASSOCIATED POWER AND CONTROL WIRING TS-040-FIT. REMOVE EXISTING PRESSURE CONNECTION LINES.
- (C) DISCONNECT AND REMOVE ALL EXISTING LIGHT FIXTURES. DEMOLISH ALL ASSOCIATED WIRING AND LIGHT SWITCHES.
- (D) DISCONNECT AND REMOVE EXISTING EMERGENCY LIGHT. DEMOLISH ALL ASSOCIATED WIRING.
- (E) DEMOLISH AND REMOVE EXISTING INSTRUMENT. DEMOLISH ALL ASSOCIATED WIRING.
- (F) DISCONNECT AND REMOVE EXISTING FIRE ALARM DEVICES. DEMOLISH ALL ASSOCIATED WIRING.
- (G) DISCONNECT AND REMOVE EXISTING START/STOP STARTER. DEMOLISH ALL ASSOCIATED WIRING.
- (H) DISCONNECT AND REMOVE EXISTING RECEPTACLES. PROVIDE COVER PLATE TO COVER EXISTING EMBEDDED RECEPTACLE DEVICE BOXES.

NOTES:

1. CONTRACTOR TO CONSULT WITH CITY IF ANY DEMOLISHED EQUIPMENT SHOULD BE TURNED TO THE CITY, OTHERWISE DISPOSE OF ALL DEMOLISHED EQUIPMENT.
2. REFER TO DRAWING 1-0660M-E0006 FOR MORE DEMOLITION DETAILS.
3. ALL DEVICES SHOWN ARE EXISTING TO REMAIN UNLESS OTHERWISE NOTED.
4. CONDUITS ASSOCIATED WITH DEMOLISHED EQUIPMENTS TO BE REMOVED.
5. CONTRACTOR TO ENSURE ALL EXISTING RECEPTACLES TO BE REMOVED.
6. REMOVE ALL CONDUIT SYSTEMS ASSOCIATED WITH DEVICES TO BE DEMOLISHED.

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

0.0 0.4 0.8 1.6 2.4


1:40

APEGM
Certificate of Authorization
SNC-Lavalin Inc.
No. 4489

| | | | | |
|-----|------------------------------------|------------|--------|-------|
| 00 | ISSUED FOR TENDER AND CONSTRUCTION | 2019/10/18 | SB | BC |
| NO. | REVISIONS | DATE | DESIGN | CHECK |

SNC-LAVALIN INC.
148 Nature Park Way
Winnipeg, MB, Canada R3P 0X7
204-786-8080

DESIGNED BY: S. BOGHOSIAN
CHECKED BY: B. CLEVEN
DRAWN BY: J. GRAGASIN
APPROVED BY: D. BECKER
SCALE: 1:40
ISSUED FOR CONSTRUCTION BY: A. WEISS
DATE: 2019/02/25
DATE: 2019/10/18
CONSULTANT NO.:

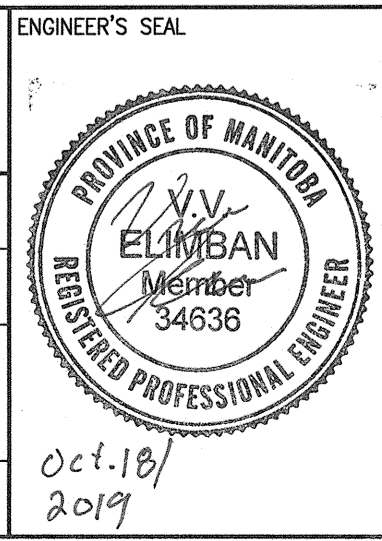

THE CITY OF WINNIPEG
Winnipeg WATER AND WASTE DEPARTMENT

TACHE BOOSTER PUMPING STATION

ELECTRICAL EQUIPMENT PLAN
BASEMENT
DEMOLITION

CITY DRAWING NUMBER: 1-0660M-E0012
SHEET: 001
REV: 00
SIZE: A1

| | |
|----------------|--|
| 1-0660M-E0006 | ELECTRICAL SINGLE LINE DIAGRAM, DEMOLITION |
| DRAWING NUMBER | REFERENCE DRAWINGS |