



- KEYNOTES: DEMOLITION PLAN**
- 1 EXISTING FRAME AND WALL ASSEMBLY C/W GLAZING TO BE DEMOLISHED. PATCH BRICK AND MAKE READY FOR NEW CURTAINWALL SYSTEM
  - 2 EXISTING RAMP AND CONCRETE WORK TO BE DEMOLISHED IN ITS ENTIRETY
  - 3 EXISTING STEEL HANDRAIL TO BE DEMOLISHED
  - 4 EXISTING STAINLESS STEEL HANDRAIL AND DOOR OPERATOR TO BE DEMOLISHED
  - 5 EXISTING CONCRETE PAD TO REMAIN. DEMOLISH TOP 1/2" AND PREPARE FOR NEW BONDED CONCRETE - REFER TO STRUCT AND SPEC
  - 6 EXISTING STEEL AND ALUMINUM FRAME AND DOORS TO BE DEMOLISHED IN THEIR ENTIRETY. PATCH BRICK AND MAKE GOOD
  - 7 EXISTING QUARRY TILE FLOORING TO REMAIN
  - 8 EXISTING MASONRY WALL TO REMAIN - PATCH AND REPAIR MASONRY AS REQUIRED
  - 9 DEMOLISH EXISTING METAL CEILING AND SOFFIT C/W LIGHTING. PREPARE ELECTRICAL FOR NEW LIGHTING
  - 10 EXISTING LIGHT TO BE DEMOLISHED - PATCH MASONRY AND MAKE GOOD
  - 11 DEMOLISH EXISTING ASPHALT IN PREPARATION FOR NEW CONCRETE STAIR
  - 12 DEMOLISH EXISTING STEEL PIPE COLUMN
  - 13 DEMOLISH EXISTING ELECTRIC HEATER
  - 14 REMOVE EXISTING STEEL GRATE COVER AND PREPARE FOR RE-INSTALLATION IN NEW CONSTRUCTION
  - 15 REMOVE EXISTING QUARRY TILE THIS LOCATION ONLY. ALIGN WITH SOUTH FACE OF MASONRY WALL
  - 16 DEMOLISH EXISTING ASPHALT IN PREPARATION FOR NEW ASPHALT
  - 17 DEMOLISH EXISTING EXIT SIGN AND ASSOCIATED WIRE/OLD. PATCH MASONRY AND MAKE GOOD

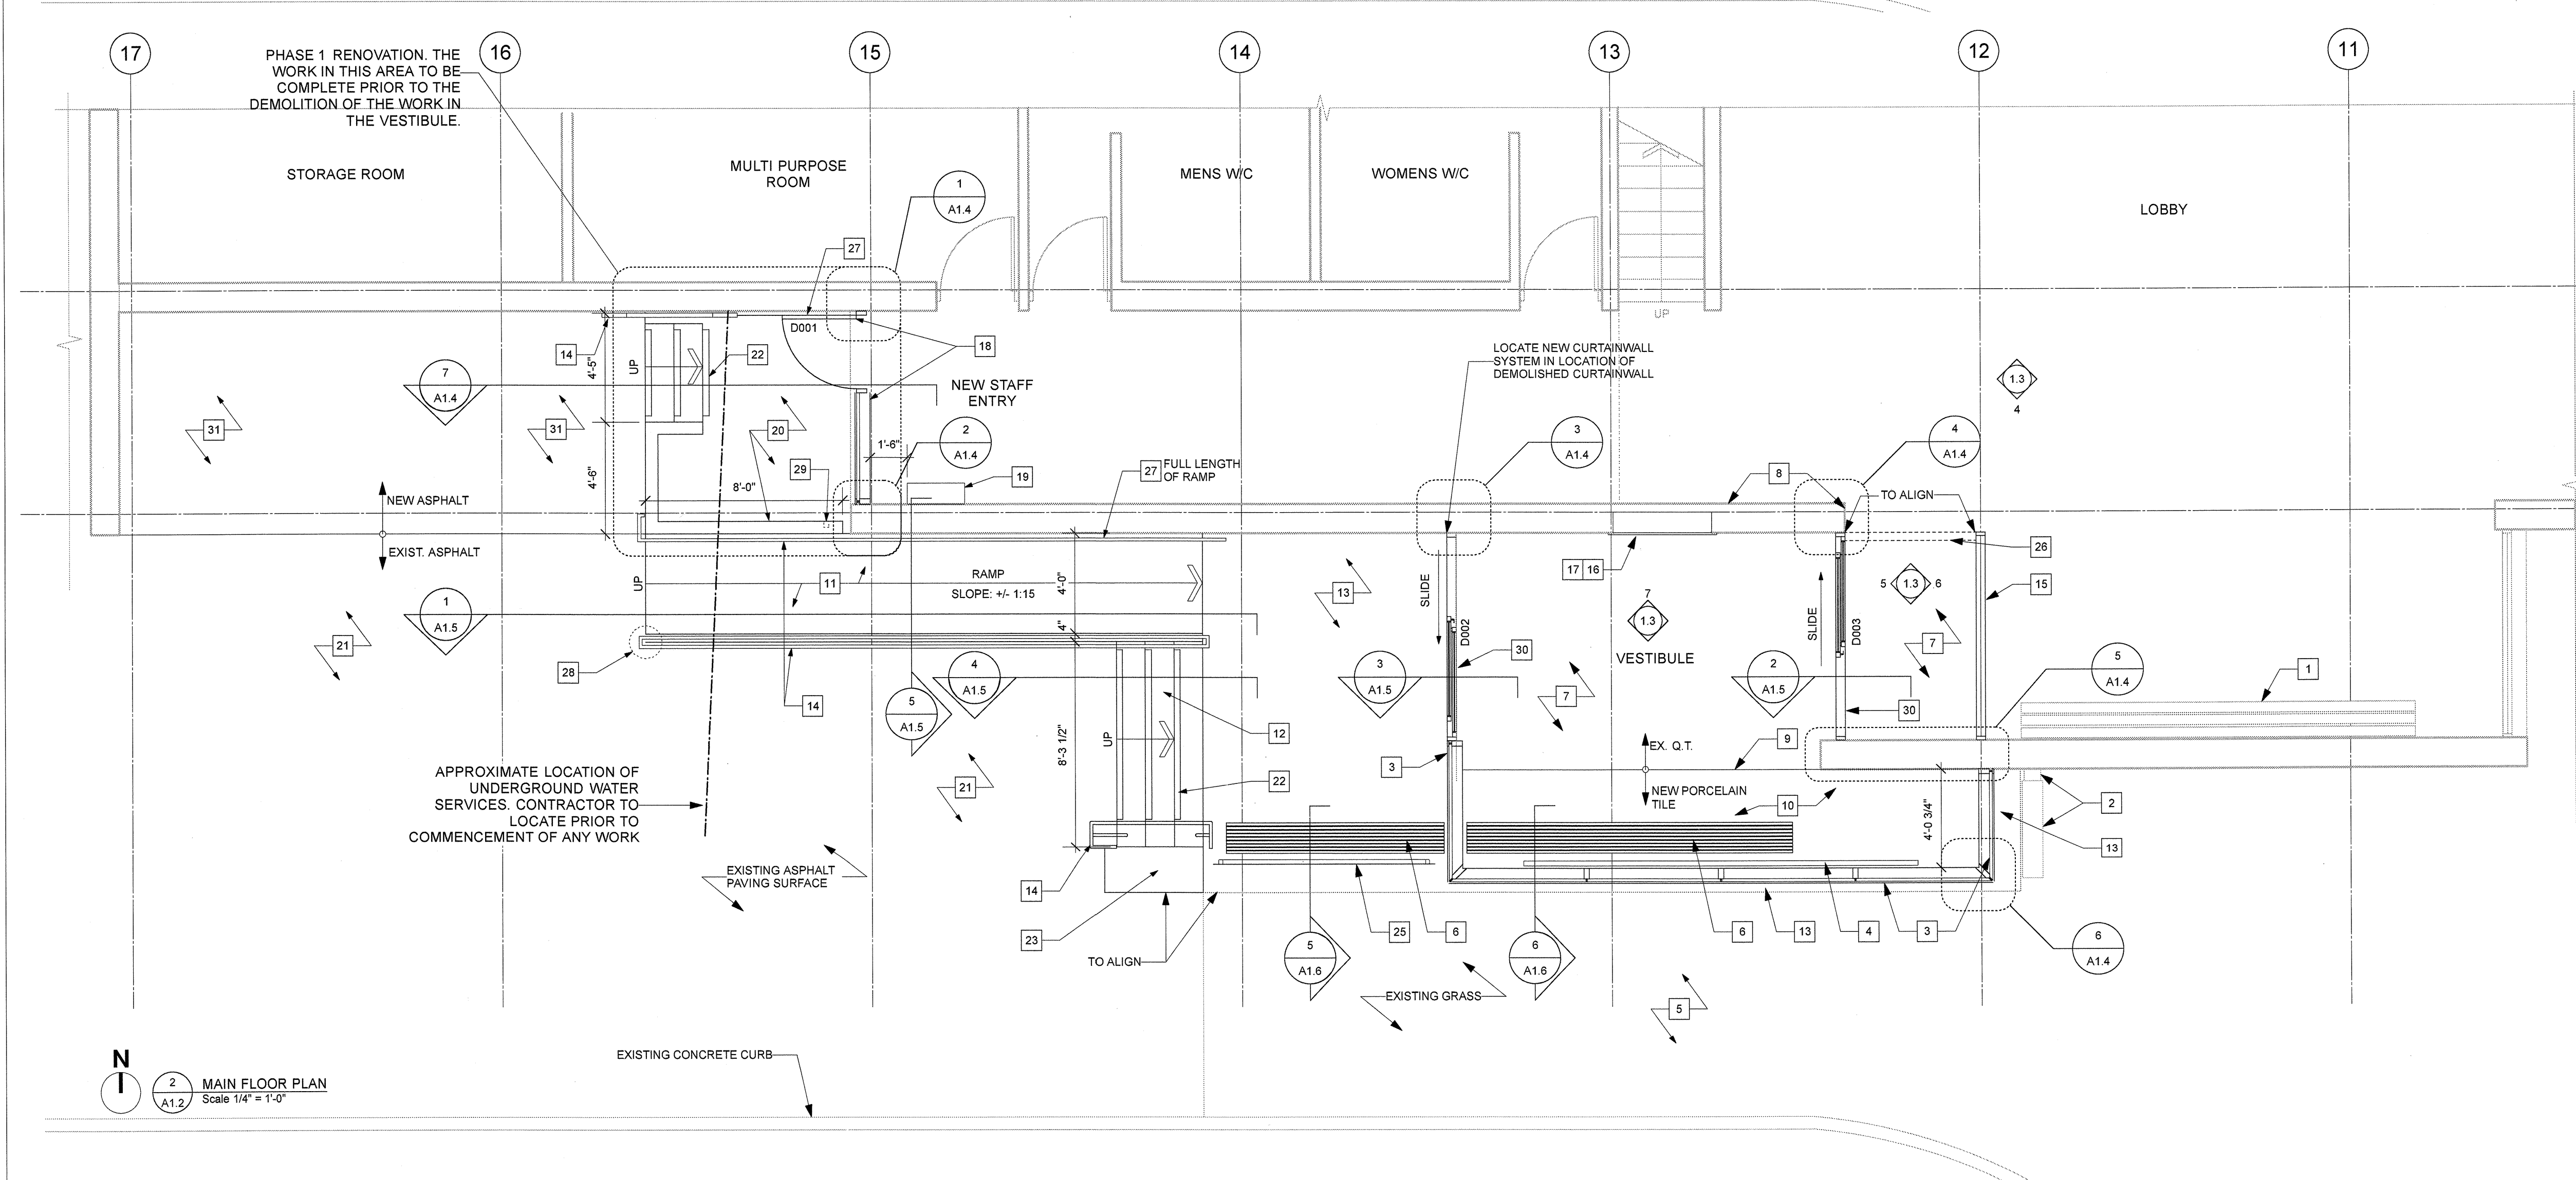

- KEYNOTES: MAIN FLOOR PLAN**
- 1 EXISTING BENCH TO REMAIN
  - 2 EXISTING RWL AND CONCRETE SPLASHPAD TO REMAIN
  - 3 NEW CURTAINWALL FRAME AND GLAZING - REFER TO SPEC.
  - 4 NEW FLOOR MOUNTED PERIMETER HEATING CABINET - REFER TO ELECT.
  - 5 REGRADE AND SOD ANY EXISTING GRASS DAMAGED DURING CONSTRUCTION UPON COMPLETION OF WORK.
  - 6 NEW WOOD BENCH C/W PAINTED STEEL FRAME REFER TO DETAILS ON A1.6
  - 7 EXISTING QUARRY TILE FLOORING TO REMAIN
  - 8 EXISTING MASONRY WALL TO REMAIN
  - 9 EXTENT OF EXISTING QUARRY TILE
  - 10 NEW PORCELAIN TILE - REFER TO SPEC.
  - 11 NEW C.I.P. CONCRETE RAMP - REFER TO STRUCT.
  - 12 NEW C.I.P. CONCRETE STAIRS - REFER TO STRUCT.
  - 13 NEW BONDED CONCRETE TOPPING - REFER TO STRUCT. AND SPEC.
  - 14 NEW STAINLESS STEEL HANDRAIL. REFER TO ELEVATIONS AND DETAILS ON A1.3 AND A1.8
  - 15 NEW ALUMINUM FRAME WALL. CENTRE ON EXISTING BEAM ABOVE - REFER TO SPEC. AND INTERIOR ELEVATIONS
  - 16 NEW RECESSED ELECTRONIC FORCE FLOW HEATER IN LOCATION OF EXISTING - REFER TO ELECT.
  - 17 RE-INSTALL EXISTING STEEL GRATE COVER. GRATE TO BE POWDER COATED - COLOUR TO BE DETERMINED BY CONTRACT ADMINISTRATOR
  - 18 NEW DOOR AND SIDELIGHT - REFER TO SPEC.
  - 19 NEW SURFACE MOUNTED ELECTRONIC FORCE FLOW HEATER - REFER TO ELECT.
  - 20 NEW C.I.P. CONCRETE LANDING C/W C.I.P. CONCRETE GAURD RAIL - REFER TO 7/A1.4 AND STRUCTURAL
  - 21 PATCH AND REPAIR ASPHALT PAVING SURFACE AS REQUIRED FROM DAMAGE DURING CONSTRUCTION
  - 22 SLIP RESISTANT NOSING (TYP. ON ALL TREADS) - REFER TO DETAILS.
  - 23 NEW CONCRETE PAD - REFER TO STRUCT.
  - 24 NOT USED
  - 25 NEW PAINTED GALV. METAL SCREEN - REFER TO DETAILS ON A1.6 AND STRUCT.
  - 26 NEW ALUMINUM SUPPORT (ABOVE) FOR WALL TO BE SUPPLIED BY CURTAIN WALL SUPPLIER
  - 27 NEW GALV. STEEL ANGLE C/W STAINLESS STEEL STRIP - REFER TO DETAIL 5/A1.5
  - 28 LOCATION OF NEW CONCRETE PILE - REFER TO STRUCT. CO-ORDINATE LOCATION WITH EXISTING UNDERGROUND SERVICES
  - 29 NEW CARDAC READER LOCATION - REFER TO ELEC.
  - 30 NEW AUTOMATIC SLIDING DOOR - REFER TO SPEC.
  - 31 NEW ASPHALT PAVING SURFACE

No.	DATE	REVISION / ISSUANCE
5	YY.MM.DD	-
4	YY.MM.DD	-
3	YY.MM.DD	-
2	YY.MM.DD	-
1	2012.03.15	ISSUED FOR CONSTRUCTION

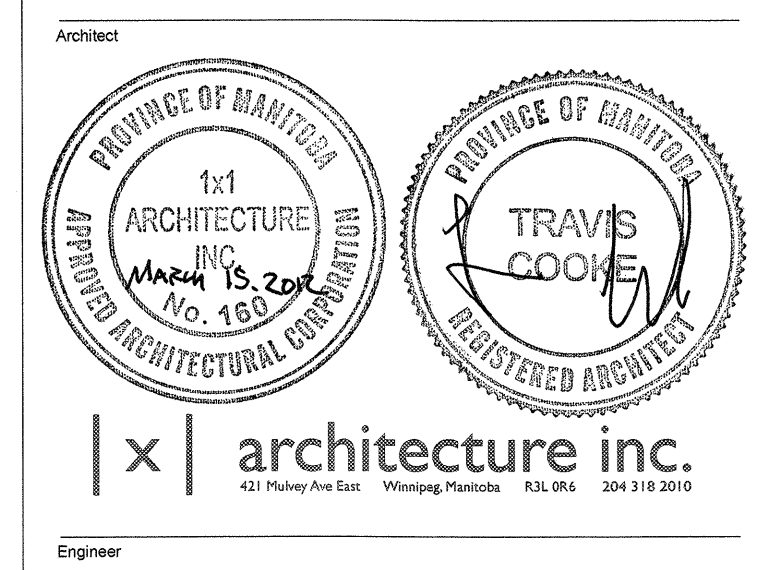

Project: BID OPPORTUNITY 139 - 2012  
 Elmwood Kildonan Pool  
 Front Entrance Upgrades  
 909 Concordia Ave

**DEMOLITION PLAN & MAIN FLOOR PLAN**

Project No. 1125  
 Sheet  
 Date MARCH 15 2012

**A1.2**