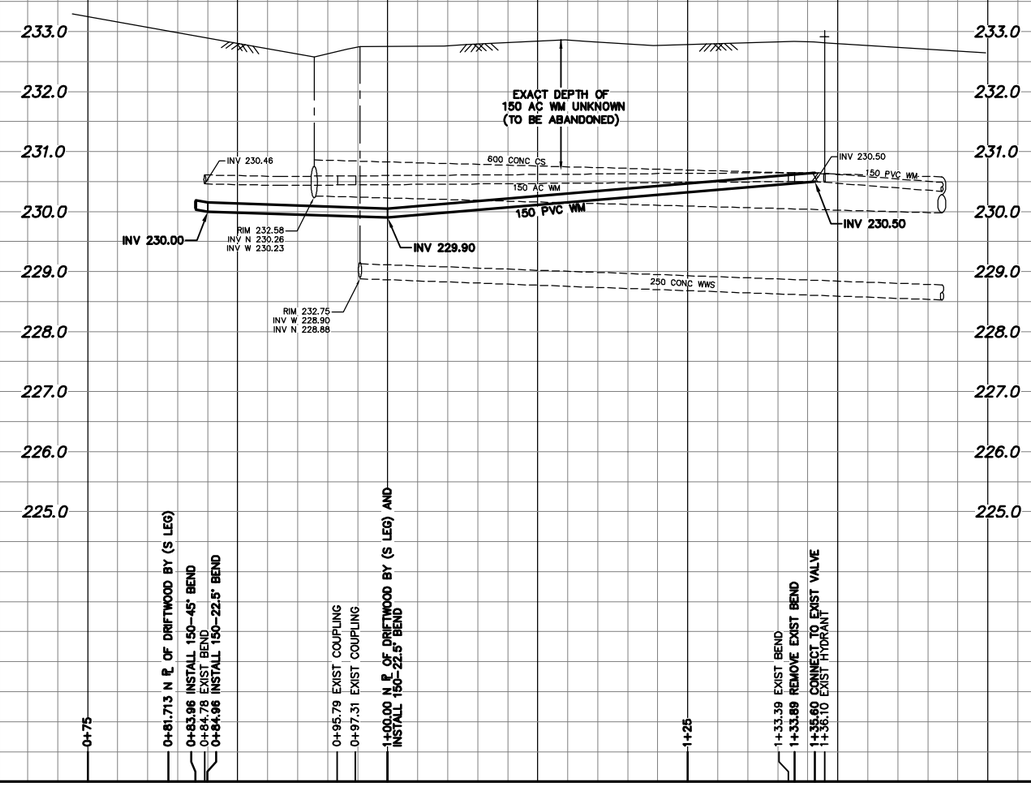

NOTE: CHAINAGES SHOWN ARE ALONG W ℄ OF DRIFTWOOD BAY

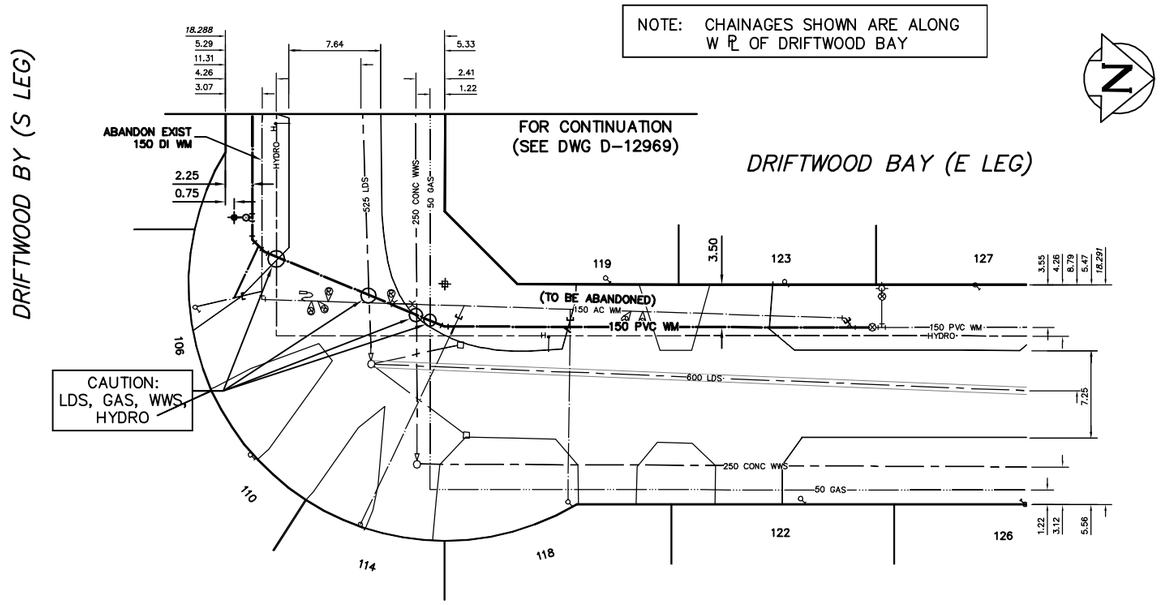

WATER SERVICE INFORMATION

ADDRESS	SIZE (mm) MATERIAL (STREET)	SIZE (mm) MATERIAL (PROP.)	SHORT & LONG MEASUREMENT	CORP. LOCATION	REMARKS
106 DRIFTWOOD BAY	20	20	6.03 E OF W HL	1.3 W OF S/C	–
RESIDENTIAL	COPPER	COPPER	1.93 EWL DRIFTWOOD (E-LEG)		–
110 DRIFTWOOD BAY	20	20	5.87 W OF E HL	–	–
RESIDENTIAL	COPPER	COPPER	14.37 EWL DRIFTWOOD (E-LEG)		–
114 DRIFTWOOD BAY	20	20	4.41 E OF W HL	7.6 N OF S/C	–
RESIDENTIAL	COPPER	COPPER	19.98 EWL DRIFTWOOD (E-LEG)		–
116 DRIFTWOOD BAY	20	20	7.5 S OF N HL	0PP OF S/C	–
RESIDENTIAL	COPPER	COPPER	10.29 NSL DRIFTWOOD (S-LEG)		–
119 DRIFTWOOD BAY	–	20	4.35 S OF N HL	–	–
RESIDENTIAL	–	COPPER	13.52 NSL DRIFTWOOD (S-LEG)		–
122 DRIFTWOOD BAY	20	20	6.44 S OF N HL	0PP OF S/C	–
RESIDENTIAL	COPPER	COPPER	29.64 NSL DRIFTWOOD (S-LEG)		–
123 DRIFTWOOD BAY	20	20	7.56 N OF S HL	–	–
RESIDENTIAL	COPPER	COPPER	28.04 NSL DRIFTWOOD (S-LEG)		–
126 DRIFTWOOD BAY	20	20	6.14 S OF N HL	–	–
RESIDENTIAL	COPPER	COPPER	48.36 NSL DRIFTWOOD (S-LEG)		–
127 DRIFTWOOD BAY	20	20	7.06 S OF N HL	–	–
RESIDENTIAL	COPPER	COPPER	44.17 NSL DRIFTWOOD (S-LEG)		–

* SERVICES TO BE RENEWED TO PL. ALL OTHERS TO BE RECONNECTED

NOTE: ALL VALVES TO BE INSTALLED CLOCKWISE TO CLOSE W/ BLACK NUT

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

0.0 5.0 10.0 15.0 20.0 25.0

WARNING

IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:

1) NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.

2) TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS.

SEE PROVINCIAL REGULATION 210/72 FOR DETAILS

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE — DATE

NOTE:

LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M.
ELEV.

COSTRUCTION COMPLETION DATE: YYYY MM DD

NO.	REVISIONS	DATE	BY

DESIGNED BY	RL	CHECKED BY	SC
DRAWN BY	RS\CJH	APPROVED BY	KZ
SCALE: HORIZONTAL	1:250	RELEASED FOR CONSTRUCTION	K.R. ZUREK
VERTICAL	1:50		
DATE	2012 04 25	DATE	APRIL 30, 2012

PLOT DATE: 2012 05 01

ENGINEER'S SEAL

ORIGINAL SIGNED BY S.R.J. COURNOYER 12-04-30

CONSULTANT DRAWING NUMBER
–

BID OPPORTUNITY: 281-2012
CONTRACT NUMBER: 7

Winnipeg

THE CITY OF WINNIPEG
WATER AND WASTE DEPARTMENT
ENGINEERING DIVISION

2012 WATERMAIN RENEWALS

DRIFTWOOD BAY (E LEG)

69 E OF QUEENSWAY CRESCENT (N LEG) TO 110 S OF BEAVERHILL BOULEVARD

SHEET 11 OF 14

CITY DRAWING NUMBER
D-12970

FILE PATH: R:\DRAWINGS\WATER\RENEWAL\2012_RENEWALS\CONTRACT 7\
FILE NAME: D-12970.dwg