


FOR CONTINUATION
SEE DRAWING D-12933

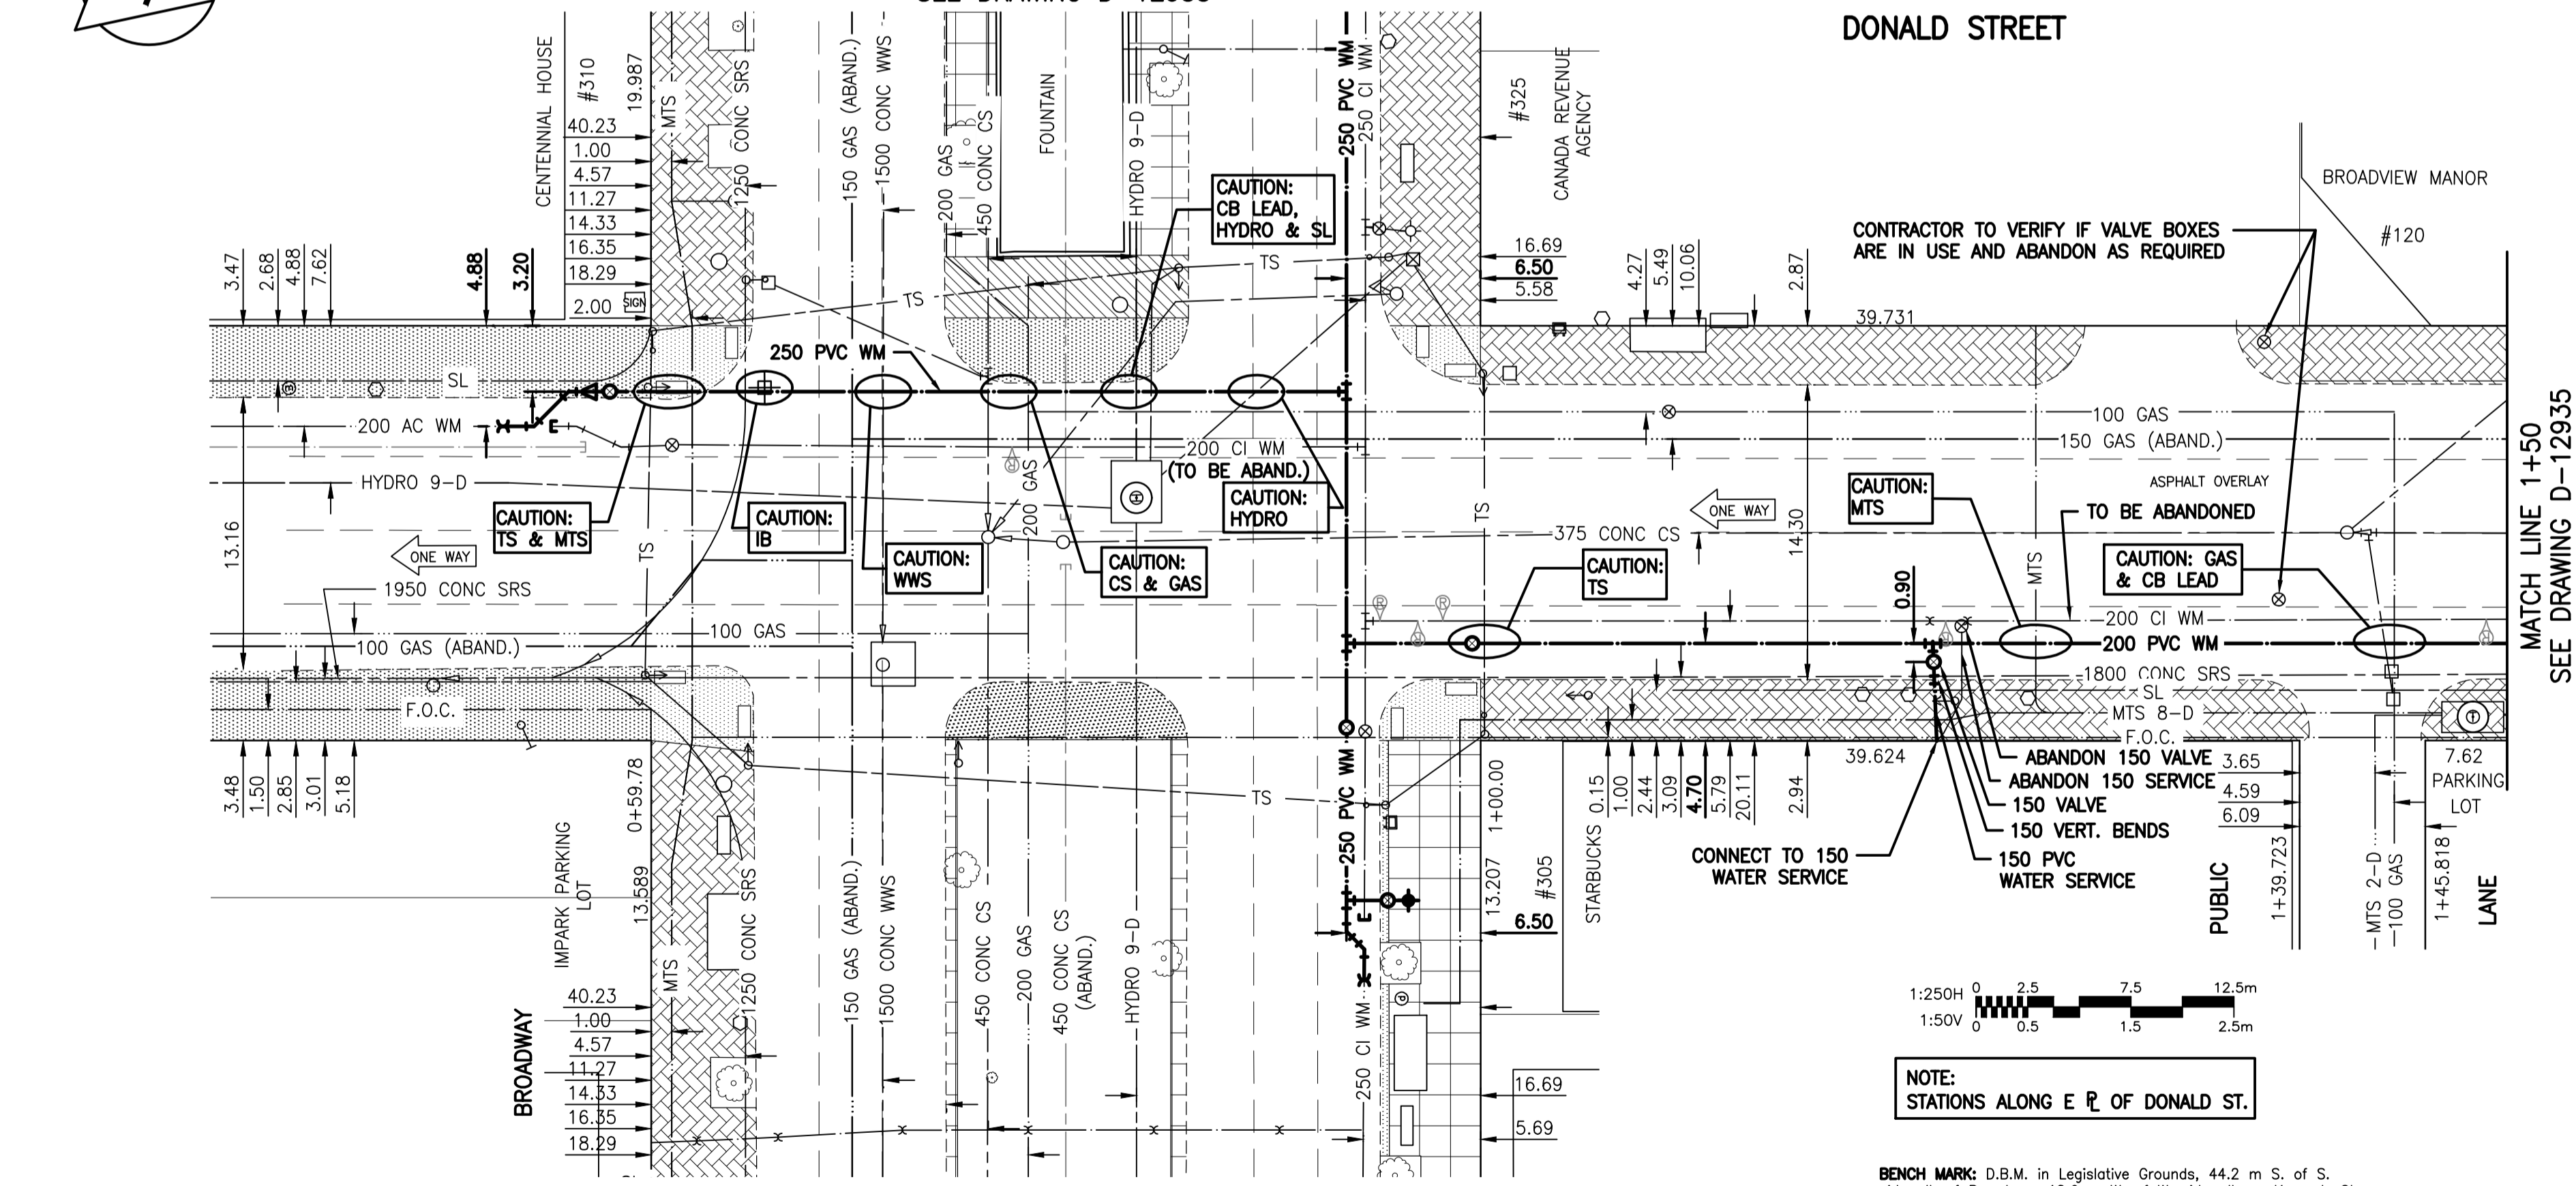

NOTE:
STATIONS ALONG E.P. OF DONALD ST.

BENCH MARK: D.B.M. in Legislative Grounds, 44.2 m S. of S. sidewalk of Broadway, 18.6 m W. of W. sidewalk on Kennedy St.

WATER SERVICE INFORMATION

ADDRESS	SIZE & TYPE STREET	SIZE & TYPE PROPERTY	STOP COCK LOCATION SHORT & LONG	CORP LOCATION FROM STOP COCK	REMARKS
#305 BROADWAY * COMMERCIAL	150 CI	150 CI	5.5 WEL DONALD 22.7>NNL BROADWAY	OPP. S/C	SERVICED OFF DONALD
#310 BROADWAY COMMERCIAL	150 CI	150 CI	NO INFORMATION VALVE 23.5 SSL BROADWAY	NO INFORMATION	SERVICED OFF DONALD
#325 BROADWAY COMMERCIAL	150 PVC	150 PVC	VALVE 14.6 SNL BLDG VALVE 20.9>NNL BROADWAY	TEE OPP. VALVE	SERVICED OFF HARGRAVE
#325 BROADWAY SPRINKLER	150 PVC	150 PVC	VALVE 14.6 SNL BLDG VALVE 20.4>NNL BROADWAY	TEE OPP. VALVE	SERVICED OFF HARGRAVE
#120 DONALD ST. UNKNOWN	150 PVC	150 PVC	VALVE 8.2 SNL BLDG VALVE 53.3 SSL YORK	TEE OPP. VALVE	SERVICED OFF DONALD
#120 DONALD ST. UNKNOWN	150 UNKNOW	150 UNKNOW	VALVE 9.6 SNL BLDG VALVE 54.6 SSL YORK	TEE OPP. VALVE	SERVICED OFF DONALD

* RENEW LEAD & CAST IRON SERVICES TO P/L WHERE MAIN IS BEING RENEWED

CONSTRUCTION NOTES:

1. EXPOSE ALL WATERMAIN CONNECTIONS AND CONFIRM INVERTS PRIOR TO CONSTRUCTION
2. INSTALL WATERMAINS AND SERVICES BY TRENCHLESS METHODS
3. THE LATEST VERSION OF THE CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATION SHALL APPLY
4. ALL BUILDINGS EFFECTED BY WATER SHUT DOWNS SHALL BE NOTIFIED A MINIMUM OF 24 HOURS PRIOR TO SERVICE INTERRUPTION
5. EXCAVATIONS UNDER AND WITHIN 1.0m OF PAVEMENT, INCLUDING SIDEWALKS, SHALL BE BACKFILLED WITH CLASS 3 BACKFILL
6. ALL EXISTING LEAD WATER SERVICES SHALL BE RENEWED TO PROPERTY LINE
7. CONTRACTOR TO CONFIRM ACTUAL LOCATION OF WATER SERVICES. SERVICES SHOWN ON PLANS ARE APPROXIMATE
8. ALL VALVES TO BE INSTALLED COUNTER-CLOCKWISE TO CLOSE

WARNING

IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:
 1) NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.
 2) TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS.
 SEE PROVINCIAL REGULATION 140/92 FOR DETAILS

METRIC

WHOLE NUMBERS INDICATE MILLIMETRES
 DECIMALIZED NUMBERS INDICATE METRES

BID OPPORTUNITY 327-2012

APEGM
 Certificate of Authorization
 Stantec Consulting Ltd.
 No. 1301

LEGEND-PLAN	PROPOSED	EXISTING	LEGEND-PLAN	PROPOSED	EXISTING	LEGEND-PROFILE	PROPOSED
150 WM	WATERMAIN	150 WM	CONCRETE	ASPHALT	150 WM	WATERMAIN	150 WM
Hydrant	Valve	Land Drainage Sewer	Waste Water Sewer	Manhole	Catch Basin	Curb Inlet	Hydro
M.T.S.	Property Line	Survey Bar	Ditch	Curb Stop	Tree	Fence	Existing
Hydrant	Valve	Land Drainage Sewer	Waste Water Sewer	Manhole	Catch Basin	Curb Inlet	Hydro
M.T.S.	Property Line	Survey Bar	Ditch	Curb Stop	Tree	Fence	Existing

LOCATION APPROVED UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE

NOTE:
 LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

Stantec Consulting Ltd.
 905 Waverley Street, Winnipeg, Manitoba
 Tel 204-489-5900 Fax 204-453-9012

DESIGNED BY: J.K.H.
 CHECKED BY: W.W.B.
 DRAWN BY: J.K.H.
 APPROVED BY: H.A.K.
 HOR. SCALE: 1:250
 VERTICAL: 1:50
 RELEASED FOR CONSTRUCTION: []
 DATE: 12.02.22

THE CITY OF WINNIPEG
 WATER AND WASTE DEPARTMENT
 ENGINEERING DIVISION

2012 WATERMAIN RENEWALS
 CONTRACT 8
 DONALD STREET
 BROADWAY TO
 50.0m N OF BROADWAY

SHEET 5 OF 8
 CAD FILE DRAWING NUMBER 13630C-205-776.dwg
 CITY DRAWING NUMBER D-12934

CONSULTANT DRAWING NO. C-205