

TYP. ROOF CONSTRUCTION:
 PRE-FIN METAL ROOF - (VICMEEST - ULTRAVIC)
 BITUMENE MEMBRANE
 1/2" EXT PLYMD DECK W/ H CLIPS
 PRE-FAB HOOD TRUSSES
 R-30 BATT INSULATION
 6 MIL POLY VB
 1/2" GMB CEILING

PRE-FIN METAL EAVESTROUGH & DOWNSPOUT

PRE-FIN METAL RIDGE CAP

PRE-FIN METAL FLAT STOCK AT BOTTOM OF LINTEL

PRE-FIN METAL CLADDING W/ HORIZ MINOR RIBS OVER LINTEL

PRE-FIN PERFORATED METAL SOFFIT W/ ALL ACCESSORIES & TRIM REQUIRED. PROVIDE STRAPPING AS NECESSARY - TYP.

PRE-FIN METAL ANGLE FLASHING CLADDING OVER BUILD-UP MD BEAM

PRE-FIN METAL SOFFIT OVER 1/2" PLYMD SHEATHING TO U/5 OF ROOF TRUSSES AT ENTRANCE AREA

PRE-FIN 5" x 5" METAL CORNER TRIM

SLOPE ENTRANCE SLAB DOWN 1" TOWARDS SIDEWALK CONC. / ASPHALT SIDEWALK PER SITE CONDITION.




T.O. SLAB
 EL. 100'-0"

3" HORIZONTAL RIGID INSULATION EXTENSION AROUND CONCRETE SLAB (INSTALL IN TWO LAYERS W/ JOINTS STAGGERED) - TYPICAL SLOPE TO DRAIN

HIGH DENSITY RIGID INSULATION UNDER THICKENED EDGE - SEE STRUCT

PRE-FIN METAL DRIP CAP
 CEMENT PARGING ON GALV. EXPANDED METAL LATH OVER 2" RIGID INSULATION AROUND FULL DEPTH OF THICKENED EDGE SLAB - TYP.
 12" MIN SOIL COVER

- SCREEN WALL CONSTRUCTION - WALL TYPE B:
- PRE-FINISHED METAL CLADDING (VICMEEST DIAMOND RIB)
 - TYVEK AIR BARRIER
 - 1 1/2" RIGID INSULATION W/ HORIZ P.T. STRAPPING / Z GIRT @ 24" O.C.
 - 1/2" EXT. PLYMD SHEATHING
 - 2" x 6" MD STUDS @ 16" O.C.
 - 1/2" EXT. PLYMD SHEATHING
 - TYVEK AIR BARRIER
 - PRE-FINISHED METAL CLADDING (VICMEEST DIAMOND RIB)

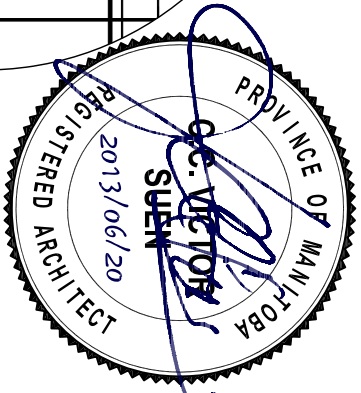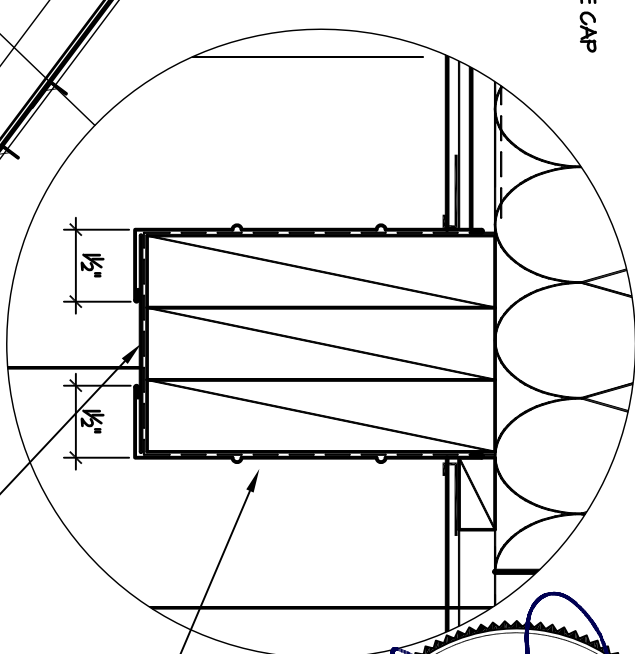

1 BLDG SECTION 5-5

A-10

SCALE 1/2" = 1'-0"