

2 MEZZANINE RCP
1:100

SHEET NOTES:
ALL AREAS OF EXPOSED METAL CORRUGATED DECK: CONTRACTOR MUST ENSURE THAT ALL DECKING SCREWS PENETRATING THE STEEL DECK ARE CENTRED IN THE TOP FLUTE ONLY AND ARE NEATLY ALIGNED. DECK SCREWS SHALL PENETRATE THE STEEL DECK BY NO MORE THAN 15mm


CEILING LEGEND

- EXPOSED STEEL STRUCTURE PAINTED
- EXPOSED CORRUGATED STEEL DECK PAINTED
- WASHABLE ACOUSTIC CEILING TILE
- GYPSUM BOARD, PAINTED
- MECHANICAL (SEE MECH.)
- AP1 610 X 610 FLUSH ACCESS DOOR (SEE MECH.)
- AP2 250 X 250 FLUSH ACCESS DOOR (SEE MECH.)
- AP3 200 X 200 FLUSH ACCESS DOOR (SEE MECH.)
- CEILING SUPPLY GRILLE (SEE MECH.)
- CEILING RA GRILLE (SEE MECH.)

LIGHTING FIXTURE LEGEND *REFER TO ELECTRICAL FOR LIGHTING FIXTURES & LAYOUT

- A 1' X 4' FLUORESCENT RECESSED DIRECT/INDIRECT
- B 4' LED WALL WASHER
- C 4' FLUORESCENT SURFACE MOUNT
- D 6" LED RECESSED POT
- E3 EXIT LIGHTING
- F EXTERIOR FLOOD
- G EXTERIOR SURFACE MOUNTED ON SOFFIT (JAM JAR)
- H 2' X 4' FLUORESCENT HIGH BAY
- I 2' X 4' FLUORESCENT RECESSED TROFFER W/ LENS
- L 4' FLUORESCENT INDUSTRIAL STRIP
- M 4' FLUORESCENT STRIP
- N 12' LED SURFACE MOUNT
- P1 4' FLUORESCENT DIRECT/INDIRECT
- P2 4' FLUORESCENT DIRECT/INDIRECT (DIMMABLE)
- V 4' FLUORESCENT SURFACE WRAP
- W 4' FLUORESCENT SUSPENDED
- WL EXTERIOR 12' LED SCENCE
- WS EXTERIOR 7' LED SCENCE

1 MAIN FLOOR RCP
1:75

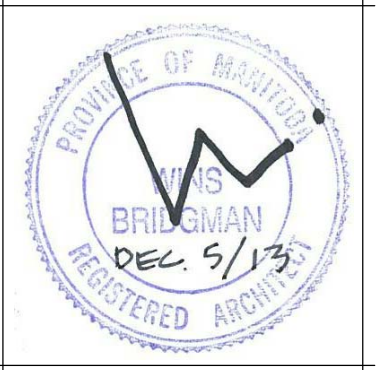

Winnipeg
THE CITY OF WINNIPEG PLANNING, PROPERTY AND DEVELOPMENT DEPARTMENT
MUNICIPAL ACCOMMODATIONS DIVISION
4TH FLOOR - 185 KING STREET
WINNIPEG, MB R3B 1J1

Project:
EAST ELMWOOD COMMUNITY CENTRE
490 KEENLEYSIDE, WINNIPEG, MB

Drawing Title:
REFLECTED CEILING PLAN

Issue/Revision Date
1 ISSUED FOR TENDER 2013-12-09

Design By: _____
Date: _____
Design Check: _____
Date: _____
Drawn By: _____
Date: _____
DWG Check: _____
Date: _____

Sheet No: **A151**

This drawing is property of the Consultant and cannot be reproduced or used without the consent of the Consultant. The contractor is responsible for checking and verifying all levels and dimensions and shall report all discrepancies to the Consultant and obtain clearance prior to commencing work.