




PARTIAL MAIN FLOOR PLAN-LIGHTING AND POWER - DEMO
SCALE: 1/8"=1'-0"

KEY NOTES:	
1	REMOVE DEVICE.
2	REMOVE AND RELOCATE DEVICE.
3	DISCONNECT WIRING AND RECONNECT AS PER RENOVATION PLAN.
4	DEVICE TO REMAIN
5	REMOVE AND RELOCATE EXISTING OUTLETS TO ALLOW FOR NEW SINK AND MILLWORK.
6	REMOVE EXISTING LUMINAIRE.
7	REMOVE OUTLETS FROM MILLWORK. BRING WIRING BACK TO NEAREST JUNCTION BOX AND SAFELY CAP.
8	EXISTING FLOOR MOUNTED OUTLETS TO REMAIN. REMOVE AND REPLACE TO ALLOW INSTALLATION OF NEW FLOOR COVERING.
9	REMOVE EXISTING VALENCE LIGHTING FROM AREAS WHERE MILLWORK IS REMOVED. MAINTAIN OPERATION OF VALENCE LIGHTING TO REMAIN.

DRAWING NOTES:	
1.	CONTRACTOR TO LOAD CIRCUITS TO A MAXIMUM OF 75% OF BREAKER RATING.
2.	EXISTING DEVICES AND FIXTURES NOT SHOWN ARE TO REMAIN. WHERE WIRING TO THESE ITEMS AFFECTS CONSTRUCTION, RELOCATE WIRING AS NECESSARY.
3.	COORDINATE MECHANICAL CONTROL CONNECTIONS WITH THAT DIVISION OF WORK.
4.	ALL EXISTING CIRCUITS IN THE WORK AREA ARE TO REMAIN TO BE RE-USED IN THE NEW CONSTRUCTION.
5.	RETAIN ALL DEVICES AND FIXTURES FOR RE-USE IN THE RENOVATION AREAS.

NOTES:

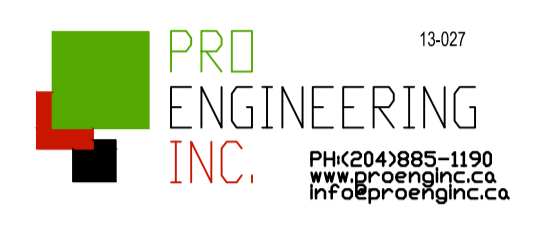

2	ISSUED FOR ADDENDUM	KO	08/10/13
1	ISSUED FOR CONSTRUCTION	KO	23/09/13

No.	REVISION/DESCRIPTION	BY	DATE
SEAL			

DRAWN	CHECKED	DESIGNED	APPROVED
KOLO		KO	
DATE: 2013.09.23	USER	APPROVAL	

Winnipeg THE CITY OF WINNIPEG
PLANNING, PROPERTY AND DEVELOPMENT DEPARTMENT
MUNICIPAL ACCOMMODATIONS DIVISION
3-65 GARRY STREET, R3C 4K4

PROJECT
WASTE WATER SERVICES
ALTERATIONS TO WASTE WATER OFFICE AREAS
1199 PACIFIC AVENUE

SHEET TITLE
DEMOLITION
LIGHTING AND POWER

SCALE AS SHOWN	PROJECT No: 2013-027	SHEET No: E1.0
-------------------	-------------------------	-------------------