


DRAWING NOTES:

- ① RELOCATE SWITCH AS NECESSARY TO MAKE IT READILY ACCESSIBLE WITH NEW ROOM CONFIGURATION.
- ② ENSURE DIMMER IS RATED FOR ITS INTENDED LOAD.

GENERAL NOTES:

- A. ENSURE THAT EXISTING WIRING EXPOSED OR AFFECTED DURING CONSTRUCTION IS REDONE OR REROUTED IN A PROPER MANNER. RE-USE CIRCUITS AND WIRING WHERE POSSIBLE. WHERE WIRING IS NOT RE-USED, STRIP BACK TO CLOSEST DISCONNECT OR PANEL.
- B. UNLESS SHOWN ON DRAWINGS, EXISTING LIGHTING AND SWITCHING TO REMAIN.
- C. ENSURE THAT ALL EXISTING FLUORESCENT LIGHTS ARE UPGRADED TO T-8'S. PROVIDE NECESSARY STICKERS SHOWING REQUIRED INFORMATION. REPAIR ANY DAMAGED SOCKETS AND LENSES.
- D. ENSURE THAT EMERGENCY AND EXIT LIGHTS ARE ON LOCAL NIGHT LIGHT CCT.

LIGHTS AND SWITCHES IN THIS AREA ARE EXISTING. RE-LOCATE AS NECESSARY TO ACCOMMODATE CHANGES IN LAY-OUT. ENSURE THAT EMERGENCY LIGHTING IS ON LOCAL LIGHTING CIRCUIT.

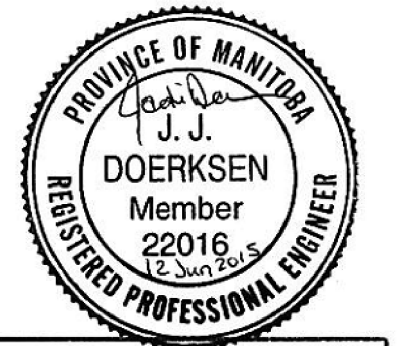

APEGM
 Certificate of Authorization
 Jorey Electric Ltd.
 No. 4600 Date: 12 Jun 2015

JOREYELECTRIC!
 Engineering Consultants
 6-1375 Nisakwa Road E
 Winnipeg MB R2J 3T3
 p. 204-255-4842
 e. info@joreyelectric.com

1 SECOND FLOOR LIGHTING PLAN
 E-3 SCALE: 1/4" = 1'-0"

1	ISSUED FOR TENDER	12 JUN 2015	JJD
2	ISSUED FOR CONSTRUCTION	1 JUN 2015	JJD
NO	REVISION	DATE	BY
Project: TRANSPORTATION MANAGEMENT CENTRE RENOVATIONS			
821 ELGIN AVE., WINNIPEG, MANITOBA			
Sheet Title: SECOND FLOOR LIGHTING PLAN			
Date: 1 JUN 2015	Sheet No.:	E-3/R-1	
By: TD			
Project No.:	14-131		