


Issue / rev.

0	2016.12.08	ISSUED FOR CONSTRUCTION
#	date	issue notes

professional seals

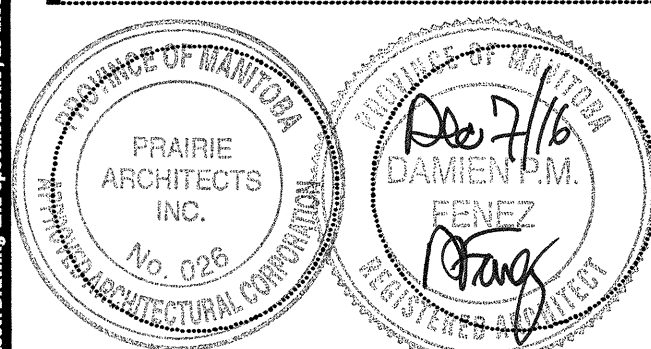

project information

SEVEN OAKS POOL RENOVATION & ADDITION
444 ADSUM DRIVE WINNIPEG, MB CANADA

client

CITY OF WINNIPEG
4TH FLOOR - 85 KING ST.
WINNIPEG, MB


drawing information

BASEMENT FLOOR PLAN & DETAILS

drawn by: **LW**
approved by: **DF**

scale: **1:100**
date issued: **2016.12.08**
proj. #: **2014.66**
rev. #: **R-0**

1 BASEMENT FLOOR PLAN
1:100

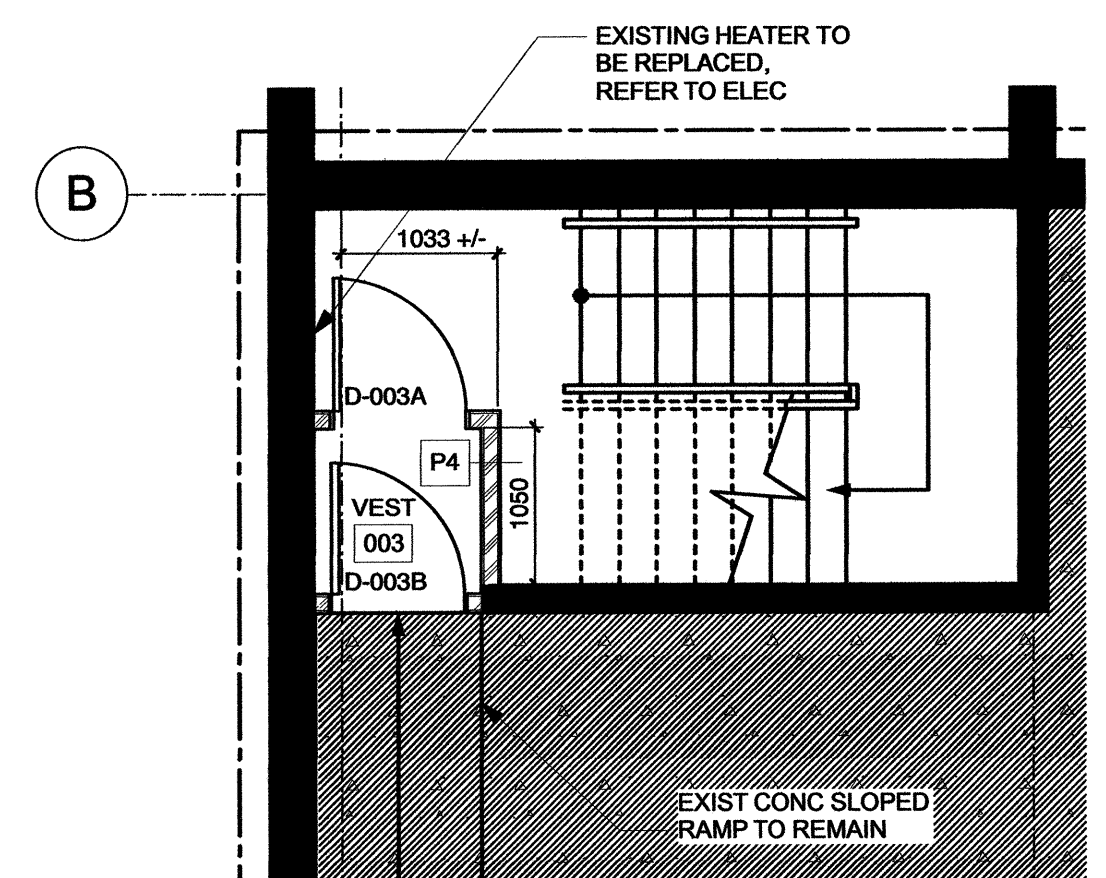

2 VEST 003 ENLARGED PLAN
1:50

FOUNDATION PLAN LEGEND:


- STRUCTURAL CONCRETE SLAB
- NEW 150 DIA. PERFORATED WEEPING TILE LINE. SLOPE TO LOW POINT 1% MIN.
- NEW 150 DIA. NON-PERFORATED WEEPING TILE LINE. SLOPE TO SUMP PIT 2% MIN.
- 1 HR. RATED FIRE SEPARATION

FOUNDATION KEYNOTES:

1. STRUCTURAL SLAB ON VOID FORM. NO CRAWLSPACE BENEATH. REFER TO STRUCT.
2. NEW 150 Ø PERFORATED WEEPING TILE CW FILTER SOCK
3. NEW SUMP PIT (REFER TO STRUCTURAL & MECH)
4. LOCATION OF STRUCTURAL GRADE BEAMS. REFER TO STRUCT
5. 150 Ø NON-PERFORATED LEADER TO SUMP PIT PROVIDED BY MECH (REFER TO MECH)
6. SUMP PUMP DISCHARGE TO STORM SYSTEM. REFER TO CIVIL & MECH.
7. SURFACE MTD FIRE EXTINGUISHER
8. TYP. FENCE PILES, REFER TO STRUCT & DETAILS
9. NEW OPENING IN EXIST FLOOR ABOVE INTO MECHANICAL CHASE UP TO ROOF
10. NEW CONC. SLAB IN EXIST. BASEMENT. REFER TO STRUCT.
11. MECHANICAL DUCT, REFER TO MECH
12. NEW CRAWLSPACE ACCESS LADDER REFER TO DETAIL 4/A4-02.
13. SAWCUT EXISTING FOUNDATION WALL AS REQUIRED FOR NEW CRAWLSPACE DOOR. 1000X1000 R.O. REFER TO DOOR SCHEDULE.

FOUNDATION PLAN GENERAL NOTES:

1. EXCAVATE CRAWLSPACE TO ELEVATIONS INDICATED IN BUILDING & WALL SECTIONS. PROVIDE F1 SLAB THROUGHOUT CRAWLSPACE 001.
2. EXISTING WEEPING TILE TO REMAIN. MODIFY / REPAIR AS REQUIRED. EXISTING SLOPES TO BE MAINTAINED.



This drawing must not be used for any other project without the written consent of Prairie Architects Inc. All dimensions are to be reported to the architect. No reproduction or use of any part of this drawing is permitted without the written consent of the architect. The architect's liability is limited to the architect's contract. The contractor shall verify all dimensions and show data on site prior to commencement of work. All discrepancies, errors, and omissions are to be reported to the architect. The contractor shall be responsible for the accuracy of the information provided. The contractor shall be responsible for the accuracy of the information provided. The contractor shall be responsible for the accuracy of the information provided.