


Material List		
Hole No.	Units	Quantity
Hole No. 2	100mm Perforated Drainage Pipe	lin. m. 75.0
	100mm Solid Drainage Pipe	lin. m. 35.0
	Lateral Slit Trenches	lin. m. 125.0
	150mm Round Catch Basins	each 5
Hole No. 4	100mm Perforated Drainage Pipe	lin. m. 220.0
	100mm Solid Drainage Pipe	lin. m. 2.5
	Lateral Slit Trenches	lin. m. 190.0
	150mm Round Catch Basins	each 9

Rebuild existing tee, realign & expand to the east (260 sq. m.)
 Topsoil & sod area 175 sq. m.
 Clear or trim trees to increase sunlight penetration

Notes
 Existing irrigation will be located and marked by contract administrator prior to start of construction.
 Any damage to existing irrigation system will be repaired immediately by contractor.

Legend	
	Irrigation Line Crossings (hand excavate)
	Round Catch Basins
	Square Catch Basins
	Slit Trenches w/ approximate length
	Mainline Trenches c/w 100mm Drainage Pipe & approx. length
	Mainline Trenches c/w 100mm Solid Drainage Pipe & approx. length
	Mainline Trenches c/w 150mm Solid Drainage Pipe & approx. length
	Existing Drainlines & Catch Basins
	Existing Irrigation Heads
	Existing Irrigation Lines
	Strip & Replace Sod b/w Works

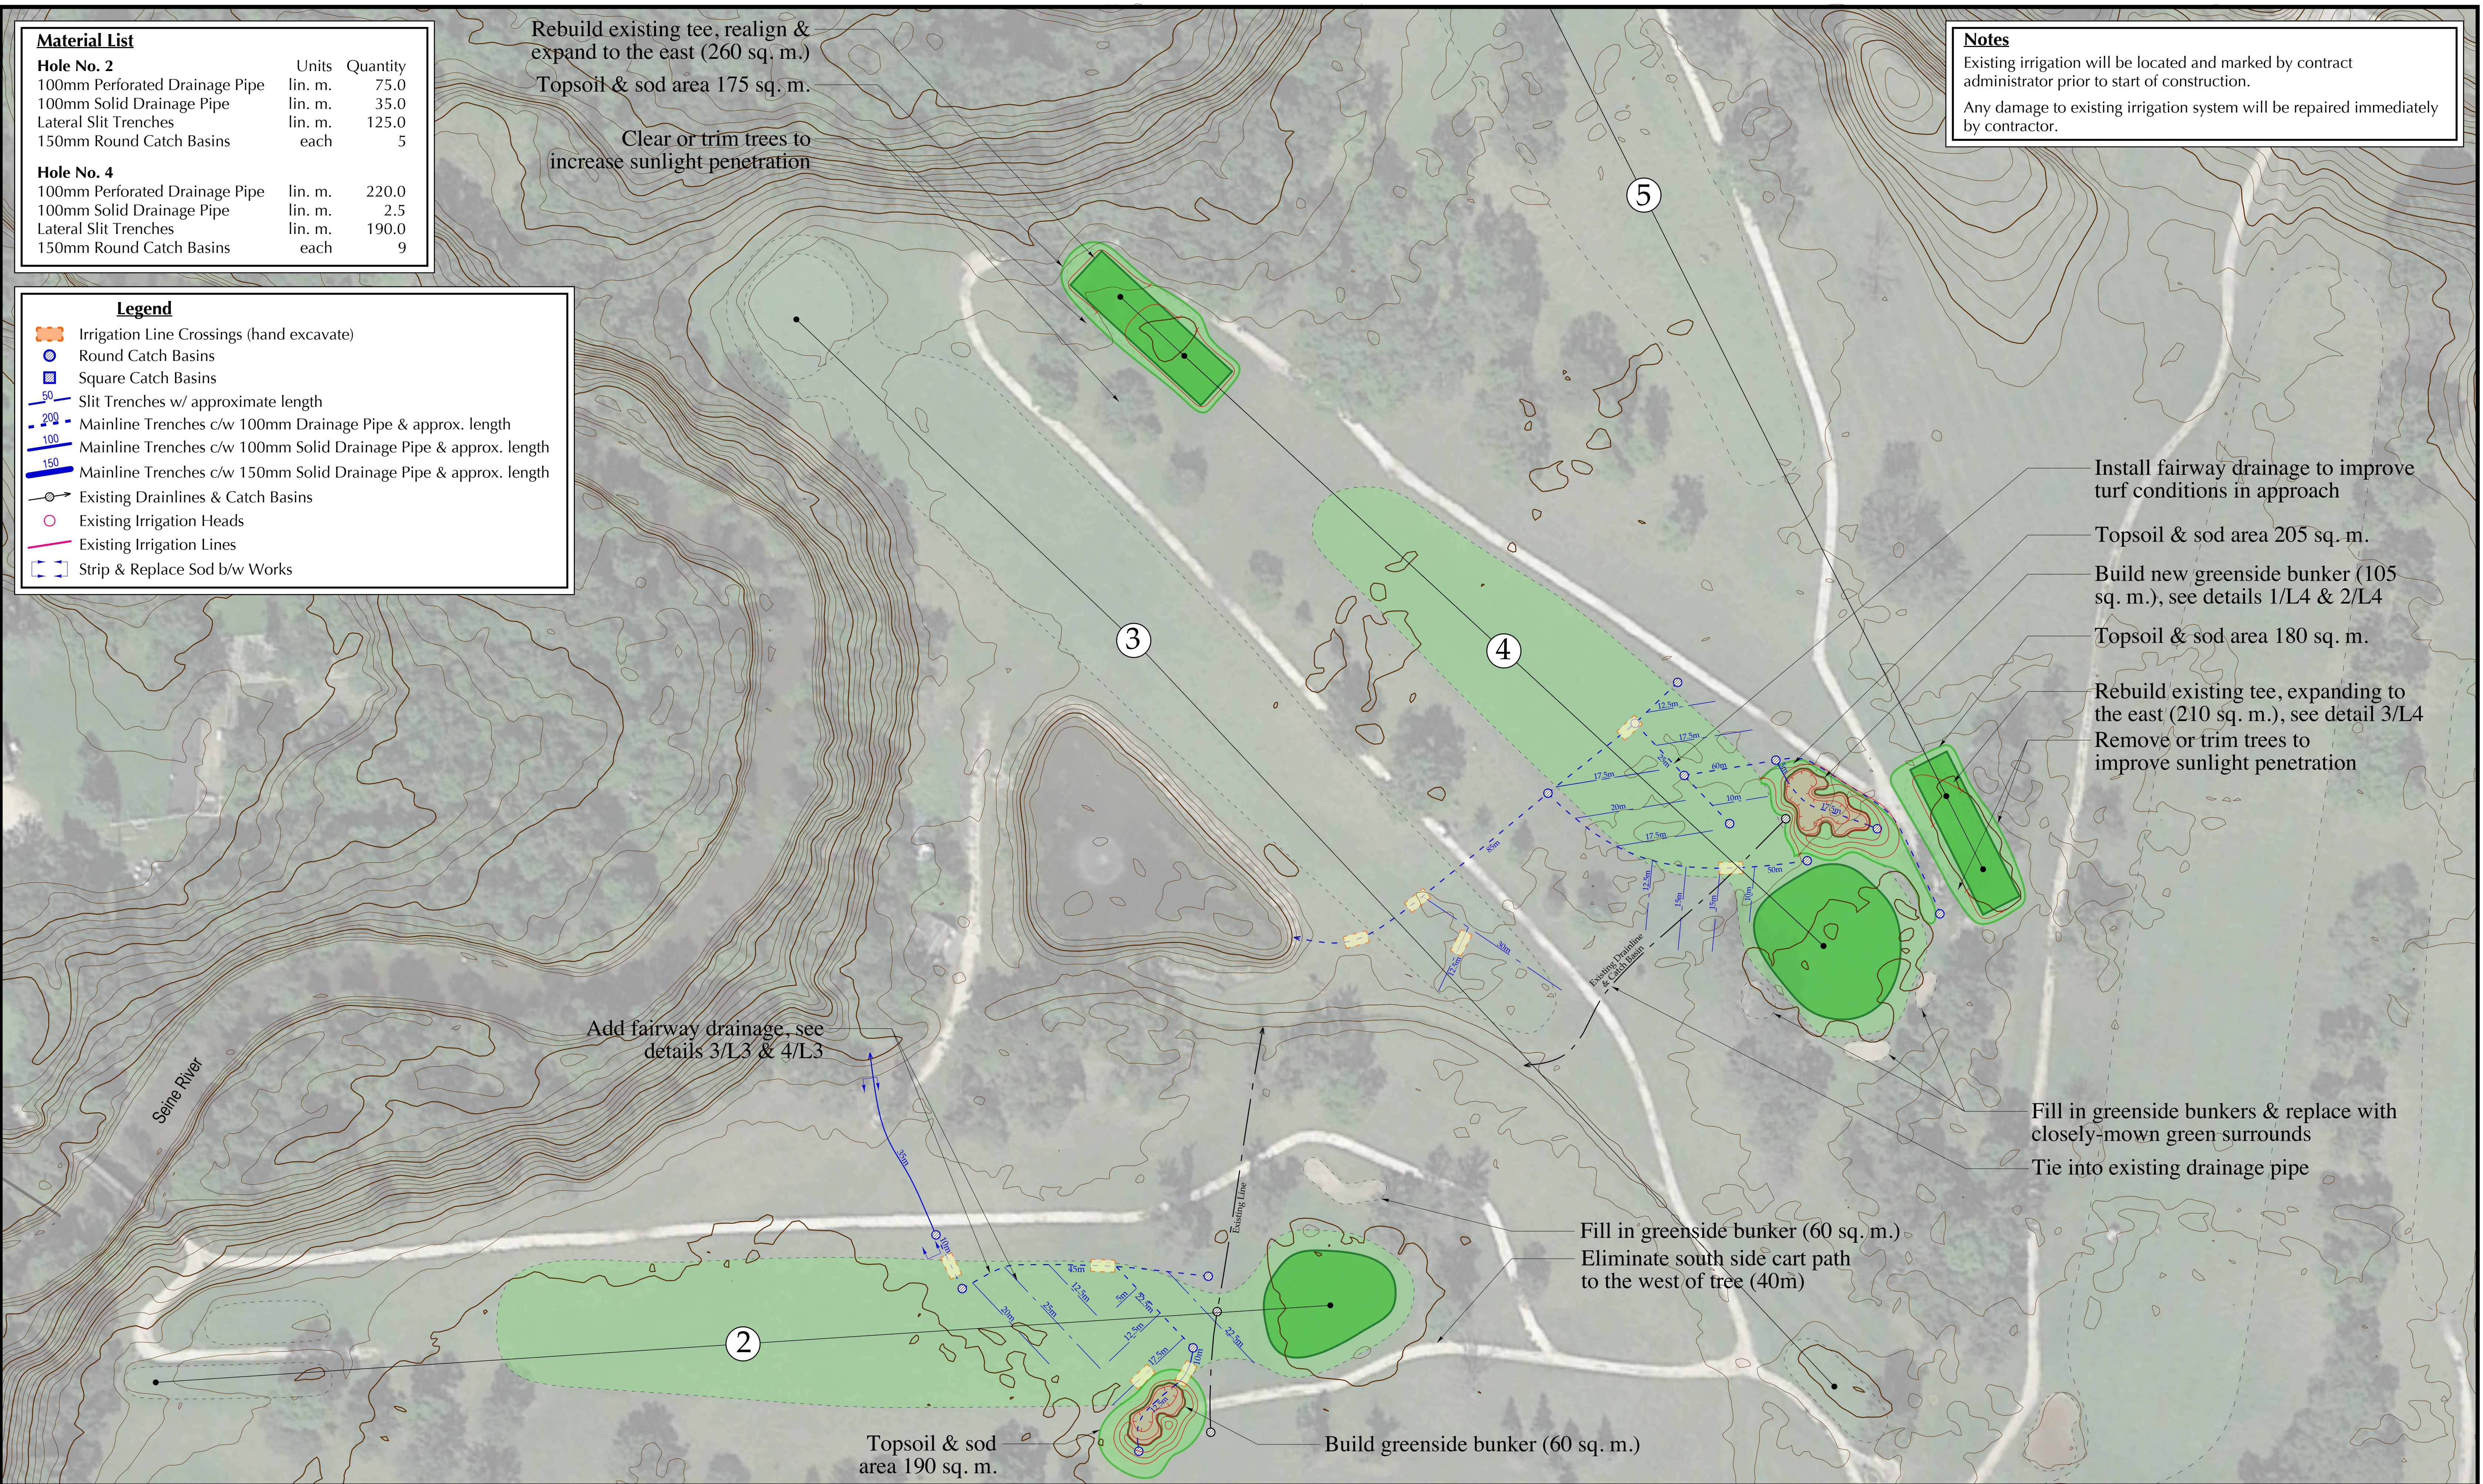

Windsor Park Golf Course

Windsor Park Golf Course

GRANT GOLF
 Golf Course Planning • Design • Construction Management
 162 Woodfield Bay, Winnipeg, Manitoba R3R 3B1
 Ph: (204) 229-2419 • Email: grantgolf@mac.com

Project: **Windsor Park Golf Course**
 10 Des Meurons St., Winnipeg, MB.
 Drawing Title: **Renovation Plan - Holes No. 2, 4 & 5**

Notes: **Bid Opportunity 511-2016**

Scale: **1 : 500**
 North:

Drawn: **TK**
 Checked: **DG**
 Proj. No.: **16.09**
 Date: **Feb. 3, 2016**
 Revisions: **June 19, 2016**

Drawing No.: **L1**