


Windsor Park Golf Course


Windsor Park Golf Course

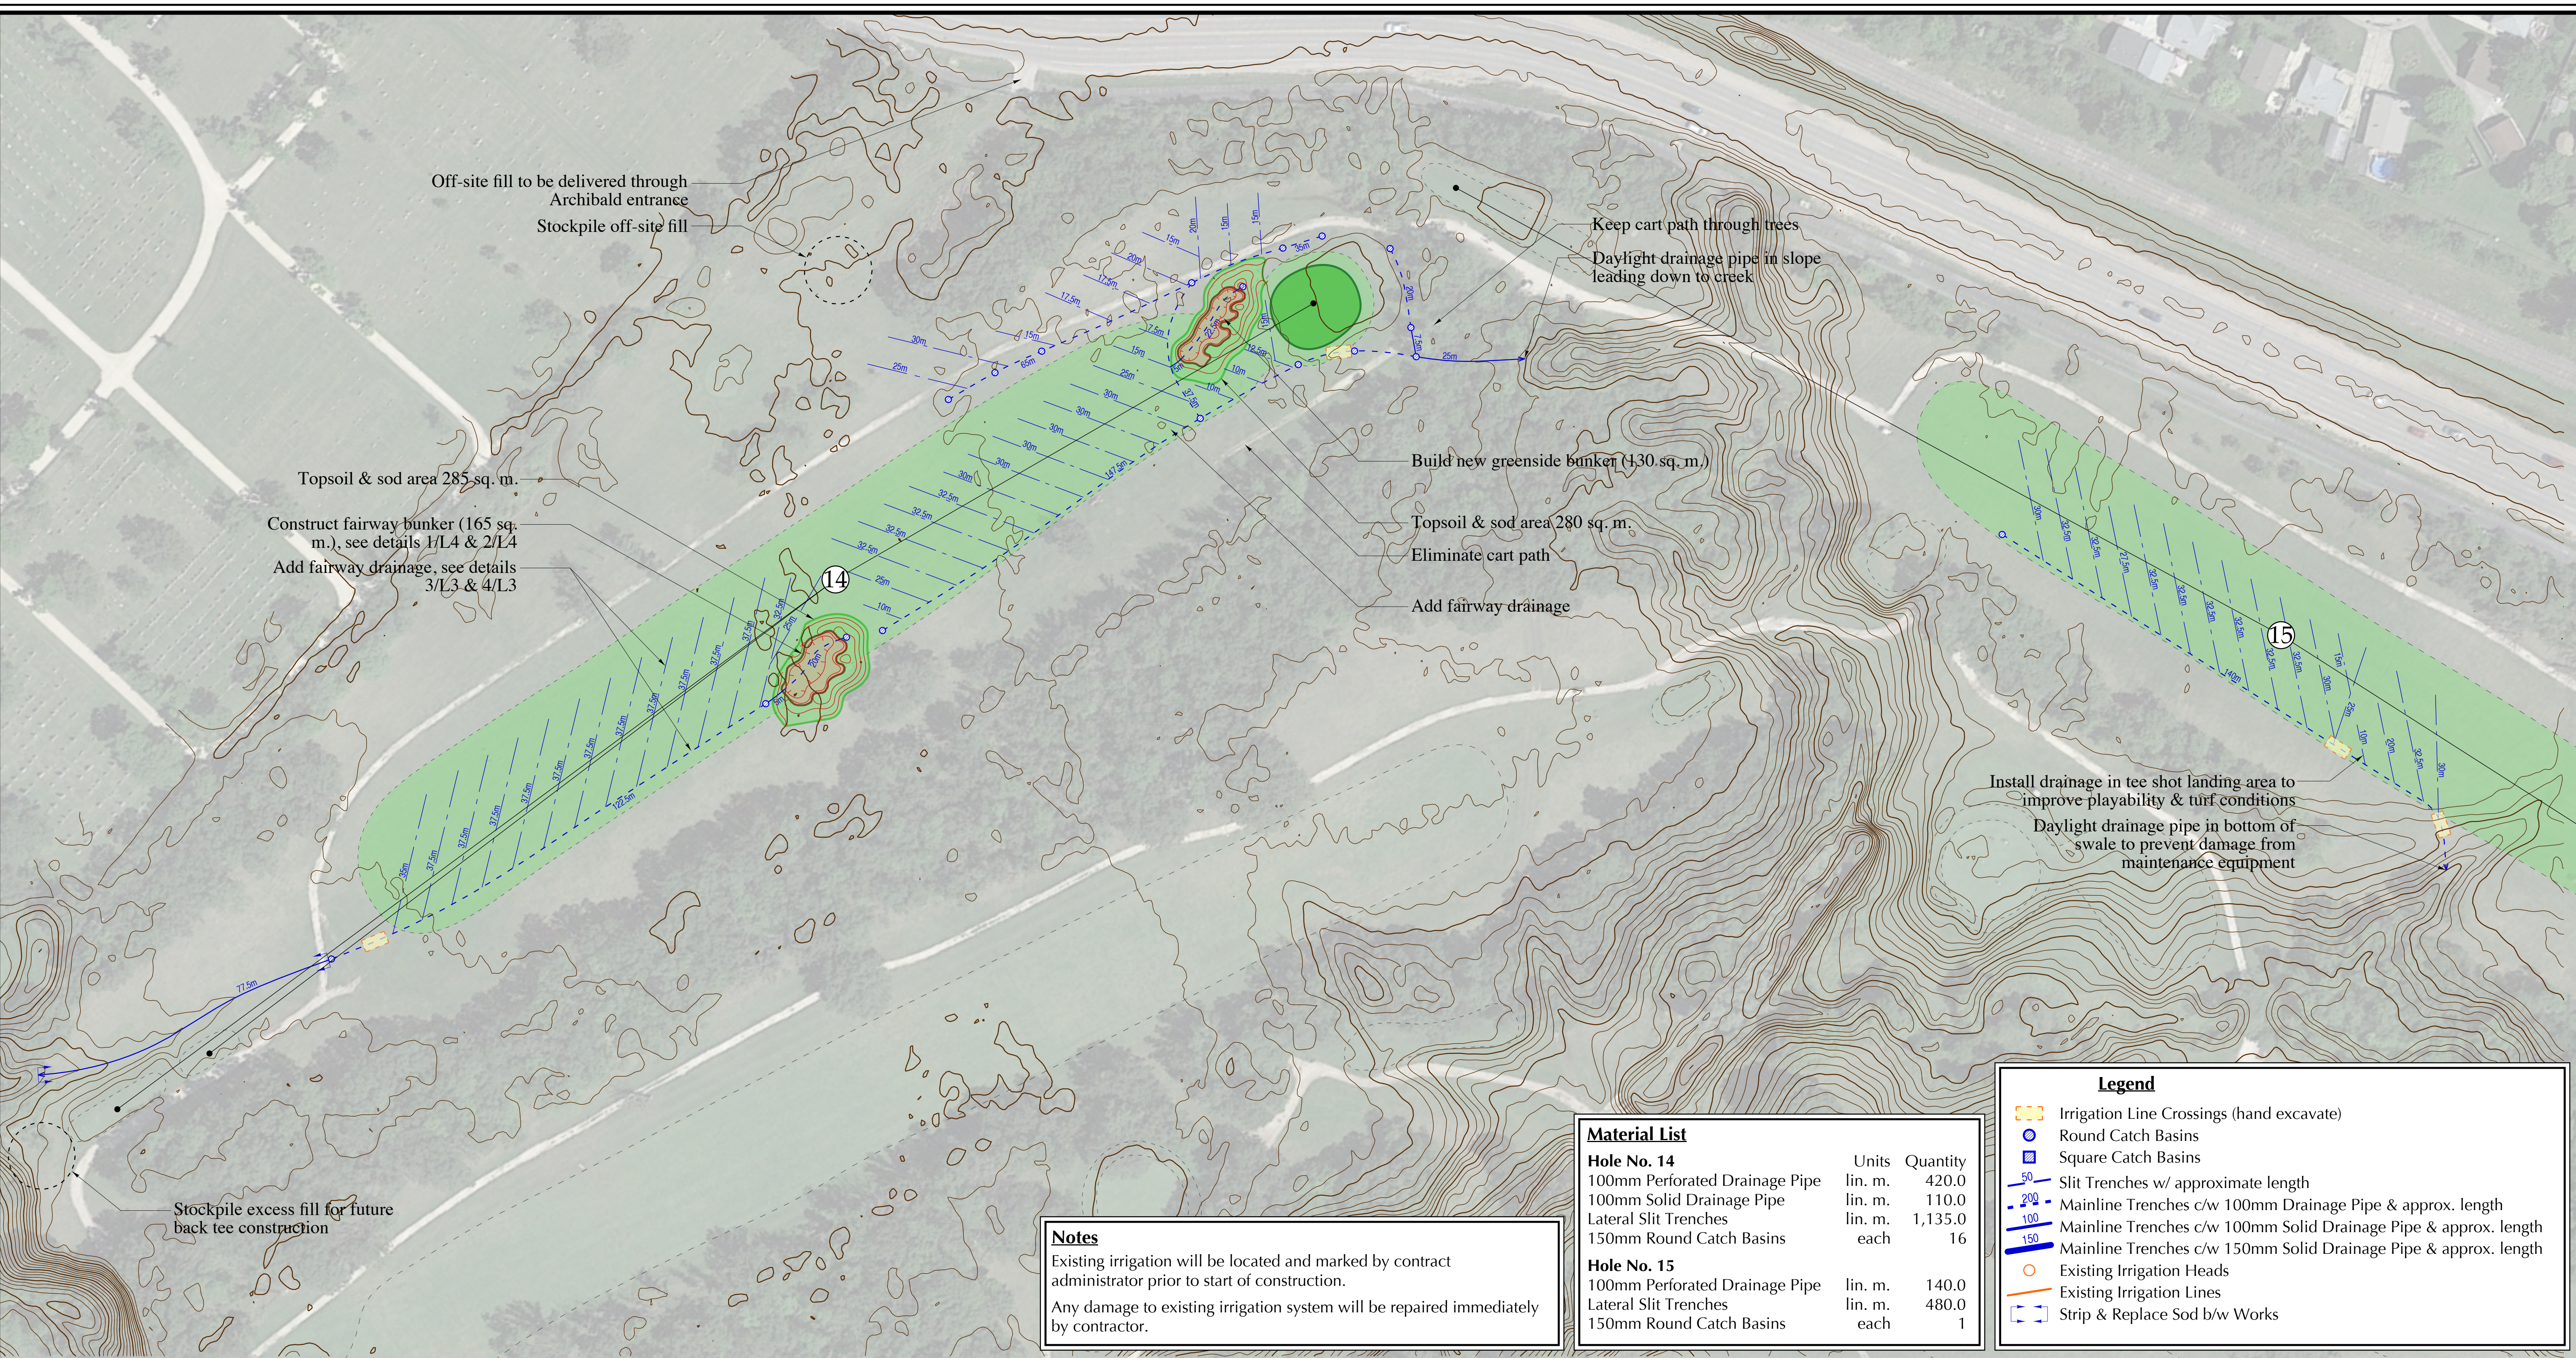

GRANT GOLF
 Golf Course Planning • Design • Construction Management
 162 Woodfield Bay, Winnipeg, Manitoba R3R 3B1
 Ph: (204) 229-2419 • Email: grantgolf@mac.com

Project: **Windsor Park Golf Course**
 10 Des Meurons St., Winnipeg, MB.
 Drawing Title: **Renovation Plan - Holes No. 14 & 15**

Notes: **Bid Opportunity 511-2016**

Scale: **1 : 700**
 North: 
 Drawn: **TK**
 Checked: **DG**
 Proj. No.: **16.09**

Date: **Feb. 15, 2016**
 Revisions: **July 5, 2016**











Drawing No.: **L2**

Notes
 Existing irrigation will be located and marked by contract administrator prior to start of construction.
 Any damage to existing irrigation system will be repaired immediately by contractor.

Material List

	Units	Quantity
Hole No. 14		
100mm Perforated Drainage Pipe	lin. m.	420.0
100mm Solid Drainage Pipe	lin. m.	110.0
Lateral Slit Trenches	lin. m.	1,135.0
150mm Round Catch Basins	each	16
Hole No. 15		
100mm Perforated Drainage Pipe	lin. m.	140.0
Lateral Slit Trenches	lin. m.	480.0
150mm Round Catch Basins	each	1

Legend

-  Irrigation Line Crossings (hand excavate)
-  Round Catch Basins
-  Square Catch Basins
-  Slit Trenches w/ approximate length
-  Mainline Trenches c/w 100mm Drainage Pipe & approx. length
-  Mainline Trenches c/w 100mm Solid Drainage Pipe & approx. length
-  Mainline Trenches c/w 150mm Solid Drainage Pipe & approx. length
-  Existing Irrigation Heads
-  Existing Irrigation Lines
-  Strip & Replace Sod b/w Works