

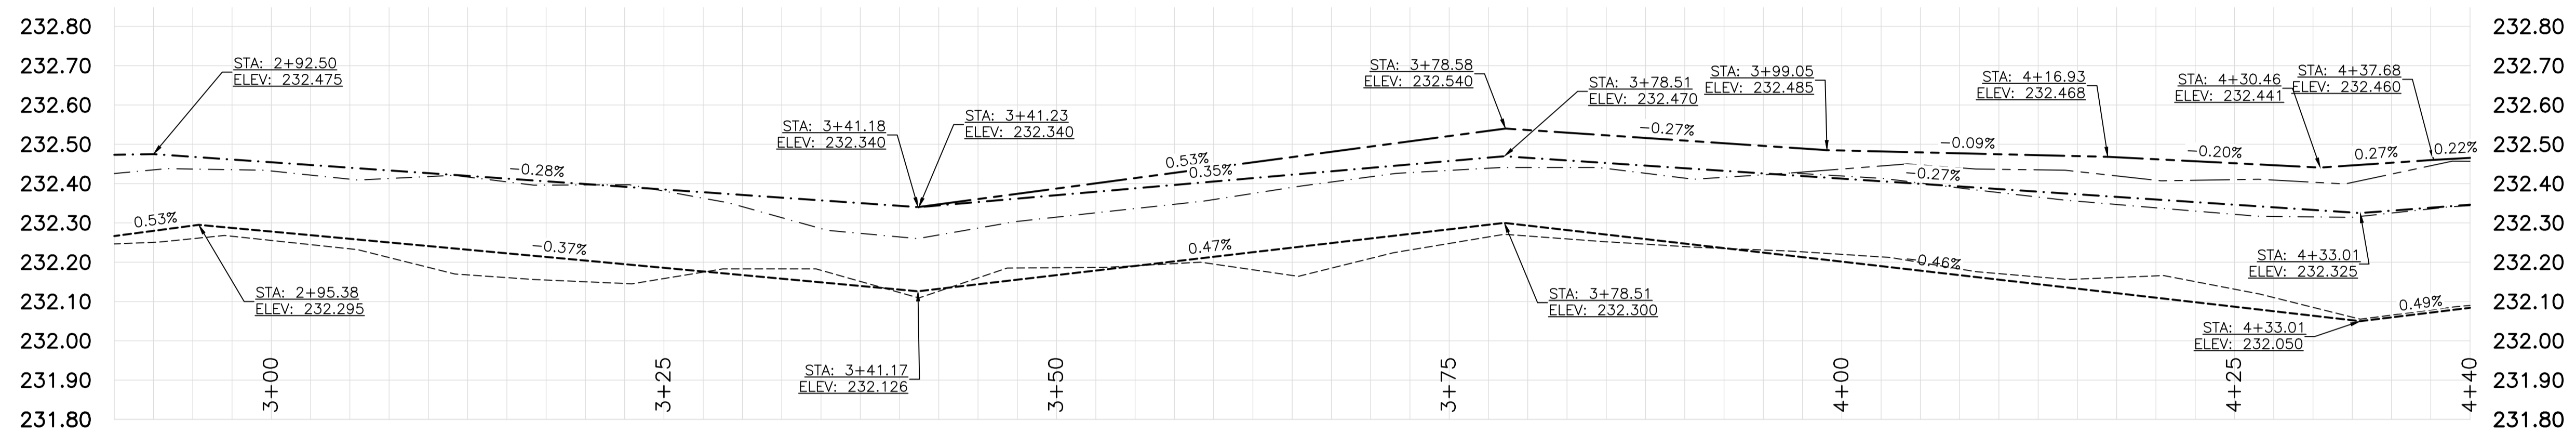


SOUTHBOUND

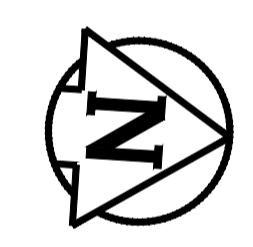

NORTHBOUND

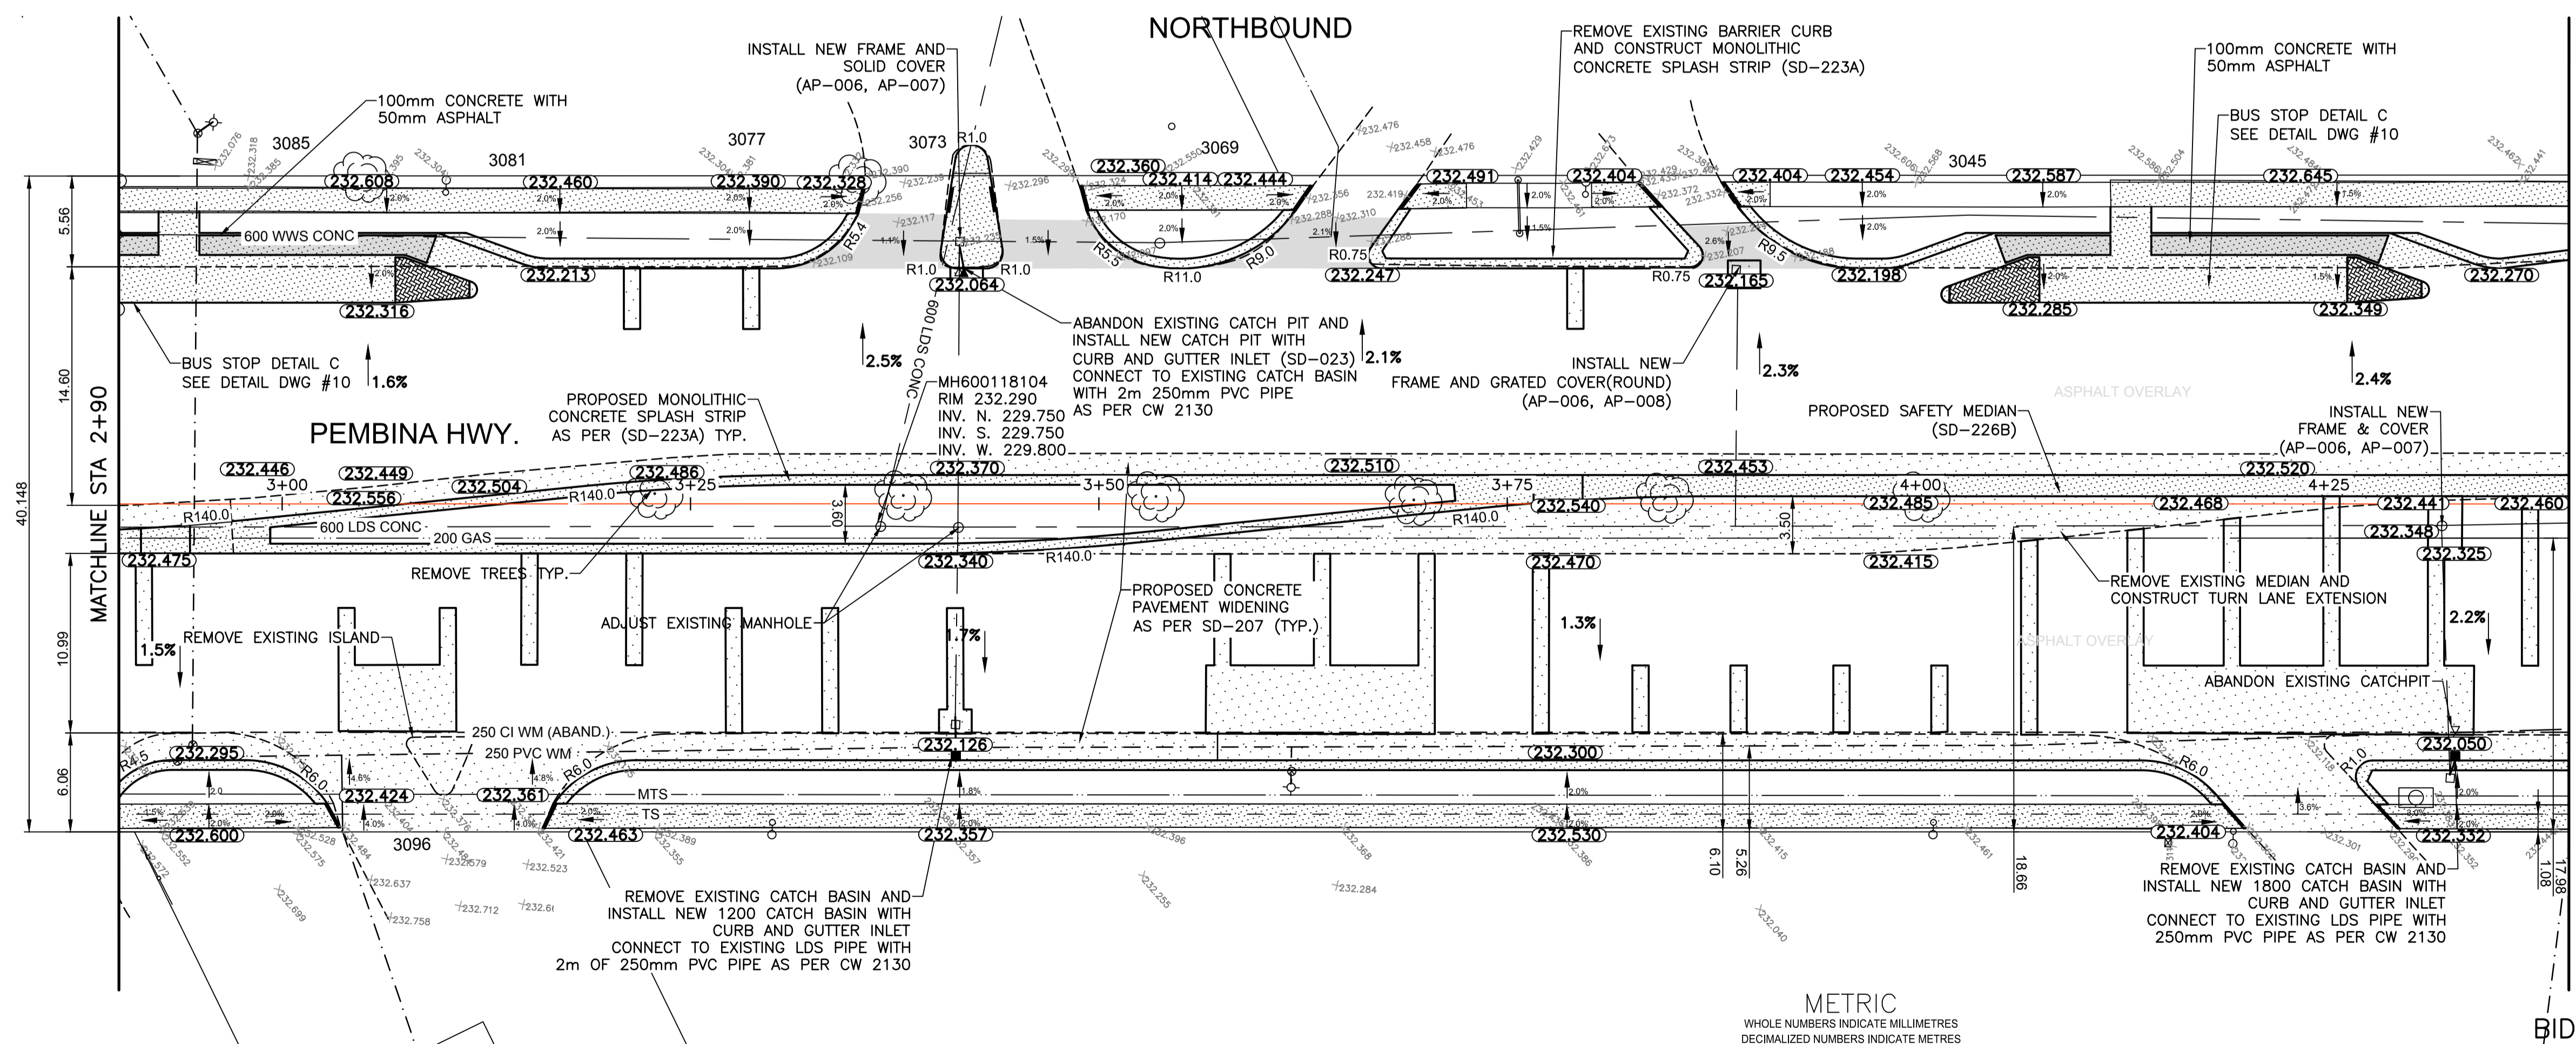

PRELIMINARY
NOT TO BE USED FOR CONSTRUCTION

- CONSTRUCTION NOTES**
- 1) CURB REPLACEMENT AS DIRECTED BY THE CONTRACT ADMINISTRATOR.
 - 2) ALL STREET RADIUS CURB UNDER 15M RADIUS SHALL BE REPLACED AS MODIFIED OR AS DIRECTED BY THE CONTRACT ADMINISTRATOR.
 - 3) PAVEMENT REPAIRS SHOWN ARE ONLY A REPRESENTATIVE SAMPLE OF THE TENDERED QUANTITIES
 - 4) ASPHALT TIE-INS ON APPROACHES TO BE DETERMINED IN THE FIELD BY THE CONTRACT ADMINISTRATOR.
 - 5) ALL BULLNOSES TO HAVE SLOPED FACE.
 - 6) INSTALL DETECTABLE WARNING TILE SURFACES AT INDICATED CURB RAMPS AS PER CW-326
 - 7) REGRADE BOULEVARD TO NEW GRADE AS REQUIRED

WARNING

IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:

- 1) OBTAIN CLEARANCE FROM THE GAS UTILITY PRIOR TO EXCAVATION.
- 2) TAKE PRECAUTION TO AVOID DAMAGE TO GAS UTILITY INSTALLATIONS.

SEE PROVINCIAL REGULATION 210/72 FOR DETAILS

BID OPPORTUNITY NO. 3-2017

EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PROFILE	PROPOSED
⊕	HYDRANT	⊕	---	LDS/WWS	---	---	CONCRETE	---
⊕	VALVE	⊕	---	WATERMAIN	---	---	CONCRETE SIDEWALK	---
⊕	CURB STOP	⊕	---	GAS	---	---	ASPHALT	---
⊕	MANHOLE	⊕	---	TRAFFIC SIGNALS	---	---		---
⊕	CATCH BASIN	⊕	---	HYDRO/STREET LIGHT	---	---	LEGEND - PLAN	PROPOSED
⊕	CURB INLET	⊕	---	MTS	---	---	LEGEND - PROFILE	PROPOSED
⊕	UTILITY BOX	⊕	---	CURB RENEWAL	---	---		---
⊕	LIGHT STANDARD	⊕	---	PROPERTY LINE	---	---		---
⊕	TRAFFIC SIGNAL POLE	⊕	---	RAMP CURB	---	---		---
⊕	SURVEY BAR	⊕	---	ELEVATIONS	231.000	---		---
⊕	GEODETIC BENCH MARK	⊕	---	TREE	---	---		---

LOCATION APPROVED UNDERGROUND STRUCTURES

SUPR. U/G STRUCTURES COMMITTEE DATE

NOTE:
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M. GBM 82-004 Tbt. in W. Conc. foundation of Fire Hall 1.2m N. of S.W. Cor. of Bldg. Elev. 232.476


NO.	REVISIONS	DATE	BY
2.	SUBMIT FOR PLAN APPROVAL	17/03/24	R.C.
1.	SUBMIT FOR ENGINEERS REVIEW	17/02/08	R.C.

**ENGINEERING DIVISION
TECHNOLOGY SERVICES BRANCH
106 - 1155 PACIFIC AVE**

DESIGNED BY R.M./M.S. CHECKED BY R.W.
DRAWN BY R.M./M.S. APPROVED BY

HOR. SCALE: 1 : 250
VERTICAL: 1 : 10

DATE 2017/03/24

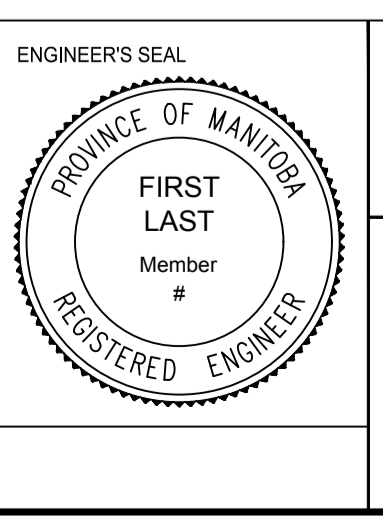

**THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT**

PEMBINA HIGHWAY
FROM DEVOS RD. TO KIRKBRIDGE DR./KILLARNEY AVE.
REHABILITATION/ACTIVE TRANSPORTATION CORRIDOR AND ASSOCIATED WORKS
FROM STA. 2+90 TO STA. 4+40

CITY DRAWING NUMBER P-3480-03
SHEET 3 OF 13
3