

**DEMOLITION NOTES**

- ① REFER TO MECHANICAL DRAWING 1-0604M-M0005-001 FOR REMOVAL OF EXISTING EQUIPMENT AND PIPING.
- ② DEMOLISH EXISTING CONCRETE PAD AND GRADE BEAM. CONCRETE PAD AND GRADE BEAM TO BE SAW CUT AND REMOVED. NO PNEUMATIC BREAKING SHALL BE PERMITTED.
- ③ EXISTING PILES (4 THUS) TO BE DEMOLISHED TO APPROXIMATELY 600mm BELOW FINISHED GRADE. PILES TO BE SAW CUT AND REMOVED. NO PNEUMATIC BREAKING SHALL BE PERMITTED.
- ④ FILL EXCAVATION WITH CLEAN SOIL AND SOD IN ACCORDANCE WITH THE CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS CW3540 AND CW3520 TO THE CONTRACT ADMINISTRATOR'S APPROVAL.

**LEGEND:**  
 - - - - - DEMOLITION  
 ———— EXISTING

1-640M-M0005	MECHANICAL DEMOLITION PLAN
DRAWING NUMBER	REFERENCE DRAWINGS



NO.	REVISIONS	DATE	DESIGN	CHECK
01	REVISED NOTES	2020/01/13	TD	TD
00	ISSUED FOR TENDER AND CONSTRUCTION	2019/11/04	TD	TD


**SNC-LAVALIN INC.**  
 148 Notaire Park Way  
 Winnipeg, MB, Canada R3P 0X7  
 204-786-8080

DESIGNED BY: T. DEGER  
 CHECKED BY: T. DEGER

DRAWN BY: K. McINTOSH  
 APPROVED BY: D. BECKER

SCALE: 1:50  
 ISSUED FOR CONSTRUCTION BY: A. WEISS  
 DATE: 2019/06/26 DATE: 2019/11/04

CONSULTANT NO.: 661472-0000-43DD-0001

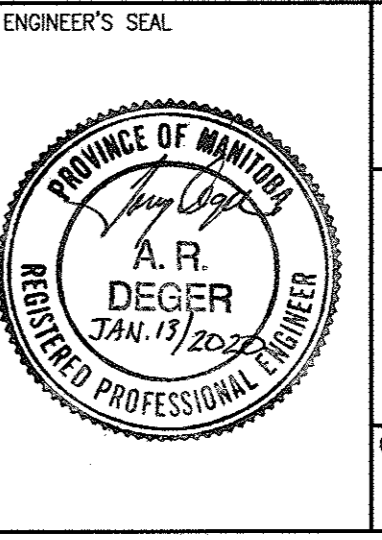

**THE CITY OF WINNIPEG**  
 WATER AND WASTE DEPARTMENT

MCPHILLIPS PUMPING STATION  
 MAIN PUMPING STATION BUILDING  
 STRUCTURAL  
 CHILLER EQUIPMENT PAD  
 DEMOLITION DETAILS

CITY DRAWING NUMBER	SHEET	REV.	SIZE
1-0640A-S0003	001	01	A1