ST DUNSTANS BAY

84.3 OF 200 WWS TO BE LINED
S–MA60019730

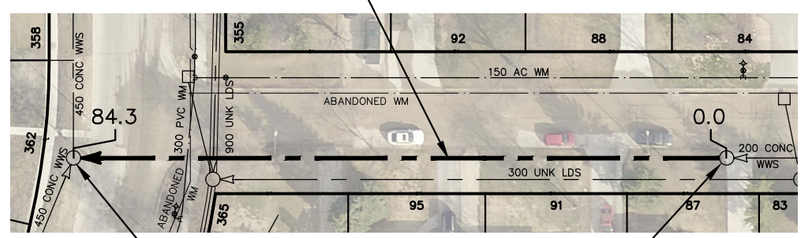

DALHOUSIE DR

S–MH60017131
RIM 232.63
INV N 225.86
INV S 225.86
INV E 228.92

S–MH60017213
RIM 232.15
INV E 229.17
INV W 229.17

SEWER JUNCTION INFORMATION FROM SEWER VIDEO INSPECTION SEWER ID S–MA60019730		
DISTANCE FROM MH ID S–MH60017213		
DISTANCE	DIAMETER	CLOCK
3.2	150	10
4.0	150	11
21.0	150	1
22.1	150	10
37.9	150	10
38.8	150	12
56.8	150	1
57.3	150	10
83.4	200	6

WARNING

IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:

1) NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.

2) TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS.

SEE PROVINCIAL REGULATION 210/72 FOR DETAILS

FOR INDEX SEE 12125

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES
0.0 10.0 20.0 30.0 40.0

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE — DATE

NOTE:

LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M.
ELEV.

NO.	REVISIONS	DATE	BY

DESIGNED BY	SC	CHECKED BY	SC
DRAWN BY	BL	APPROVED BY	KZ
SCALE: HORIZONTAL	1:750	RELEASED FOR CONSTRUCTION	K.ZUREK
VERTICAL			
DATE	2019 03 06	DATE	2019 03 06

PLOT DATE: 2019 03 06

ENGINEER'S SEAL
ORIGINAL SIGNED BY S.R.J. COURNOYER 19/03/05

CONSULTANT DRAWING NUMBER
–

Winnipeg

THE CITY OF WINNIPEG
WATER AND WASTE DEPARTMENT
ENGINEERING DIVISION

2018 SEWER MAIN RENEWALS
BY CIPP LINING
ST DUNSTANS BAY
1ST MH E OF DALHOUSIE DRIVE TO MH AT DALHOUSIE DRIVE

SHEET 55 OF 69

CITY DRAWING NUMBER
12177

BID OPPORTUNITY: 146–2019
CONTRACT NUMBER: 3

FILE PATH: R:\DRAWINGS\SEWER\2018 RENEWALS\RENEWALS & ASSOCIATED WORKS\CONTRACT 3\CONSTRUCTION DWGS\
FILE NAME: ST DUNSTAN'S BAY.dwg