

GENERAL NOTES

- A. ALL WIRING INDOORS TO BE RW90 COPPER IN EMT CONDUIT UNLESS OTHERWISE NOTED.
- B. PROVIDE BOND CONDUCTOR IN ALL CONDUIT RUNS.
- C. REMOVE ALL ABANDONED EQUIPMENT AND SERVICES WITHIN AREA OF WORK.
- D. THIS BUILDING MAY CONTAIN ASBESTOS, REFER TO FRONT END SPECIFICATIONS FOR FURTHER INFORMATION.


KEY NOTES

- 1. EXISTING EQUIPMENT TO BE REMOVED, REMOVE WIRING, CONDUIT, ETC. BACK TO SOURCE, TURN OVER EQUIPMENT TO CITY.
- 2. EXISTING MCC TO BE REMOVED UPON DEMOLITION OF CONNECTED LOADS, REMOVE WIRING, CONDUIT, ETC. BACK TO SOURCE, TURN OVER EXISTING MCC TO CITY. LABEL EXISTING 125-3P BREAKER IN MAIN DISTRIBUTION AS SPARE (LAMACOD MATCH EXISTING).

0	ISSUED FOR CONSTRUCTION	VEK	16/01/20
NO.	Description	BY	DDMMYY



770 Bradford Street
Winnipeg, Canada
T 204 775 0291
SMSeng.com

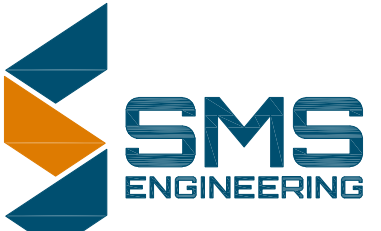

MOTOR SCHEDULE

MOTOR/EQUIP ID	NAME	LOCATION	H.P. (kW)	VOLTS	STARTER & ACC.			SOURCE	STARTER LOCATION	FEEDER	REMARKS
					MAN	MAG	PL				
HRU-9	Heat Recovery Unit	Roof	58.8 FLA	600V/3ø				CDP-RS	PACKAGED UNIT	3#1	PACKAGED UNIT
HRU-10	Heat Recovery Unit	Roof	11 FLA	600V/3ø				CDP-RS	PACKAGED UNIT	3#10	PACKAGED UNIT
HRU-11	Heat Recovery Unit	Roof	58.8 FLA	600V/3ø				CDP-RS	PACKAGED UNIT	3#1	PACKAGED UNIT



Project Title
CITY OF WINNIPEG FORT ROUGE TRANSIT BASE - STORAGE TRACK 25-36 - MECHANICAL UPGRADE
WINNIPEG MANITOBA

Drawing Title
PARTIAL SINGLE LINE DIAGRAM AND MOTOR SCHEDULE

Drawn By WPD	Checked By RD	Approved By VEK
Scale AS NOTED	Date JANUARY, 2020	Project No. 19-332-02
Revision Number 0	Drawing Number E3.1	Sheet Order 6 OF 6

FILE NAME AND PATH: C:\PROJETS\2019\19-332-Forma Track 25-36-Mechanical Upgrade\01-Cable_Renov_A-Electrical\01-EL-1-SS_Line Layout.dwg
LAST SAVED BY: wpd
DATE PLOTTED: Monday, October 1, 2019 12:22:27 PM