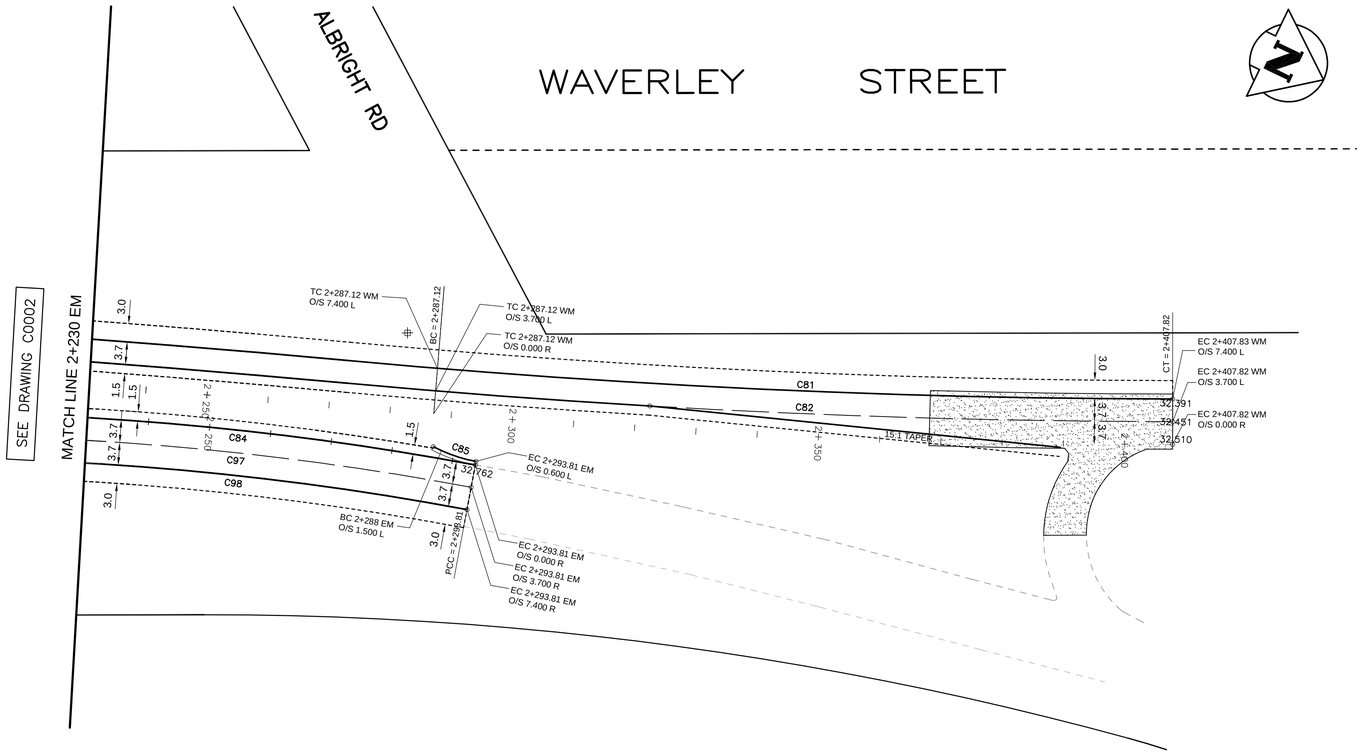

CIRCULAR CURVE DATA				
CURVE	RADIUS	TANGENT	DELTA	LENGTH
C81	1492.60	60.08	4°36'37"	120.10
C82	1496.30	60.23	4°36'37"	120.40
C84	500.00	44.27	10°07'08"	88.30
C85				
C86	5.00	1.57	34°51'39"	3.04
C87	1500.60	5.00	0°22'55"	10.00
C88	1.50	2.75	122°43'54"	3.21
C97	496.30	43.94	10°07'08"	87.65
C98	492.60	43.61	10°07'08"	87.00

GENERAL NOTES

1. CHAINAGE IS ALONG PROPOSED WEST AND EAST MEDIAN CONTROL LINES OF WAVERLEY STREET.
2. STATION 1+000 = NW CORNER OF JOHN ANGUS DRIVE & WAVERLEY STREET
3. REFER TO DRAWING C0008 TO C0011 FOR WAVERLEY ST PLAN AND C0012 TO C0015 FOR WAVERLEY ST PROFILES.

Control Survey Monuments (Local Coordinates)					
No.	GBM	Elevation	Northing	Easting	Description
CP 1		232.535 m	3000.042	10000.005	IB CP1
CP 2	GBM82024	232.259 m			83R523 - N.E. COR. WAVERLEY ST. & SANDUSKI DR.,WHICH IS APPROX. 12m S.OF 9th SET OF H LINE HYDRO POLES S. OF LEE BLVD. ON E. SIDE OF WAVERLEY ST., TBLT. ON TOP OF 0.05m DIA. x 2.4m IRON PIPE, IN VALVE BOX, 1m W. OF E.L. WAVERLEY ST. & 0.15m S. OF N.L. SANDUSKI DR.
CP 3	GBM82020	232.892 m			N. SIDE LEE BLVD., E. OF WAVERLEY ST., TBLT. IN S. CONC. FOUNDATION OF No. 1301 LEE BLVD., CANADIAN NAZARENE COLEEGE MEN'S RESIDENCE, 0.5m W. & 0.5m BELOW TYNDALL STONE OF MOST SLY. PROJECTION OF S.E. COR. OF BLDG.
CP 3	GBM75006	232.474 m			216 (654216) - N.W. COR. WAVERLEY ST. & CADBORO RD.,TBLT. IN 7.6m CONC PILE BENEATH VALVE BOX, 6.3m E. OF W.L. WAVERLEY ST. & 6.8m S. OF N.L. CADBORO RD.

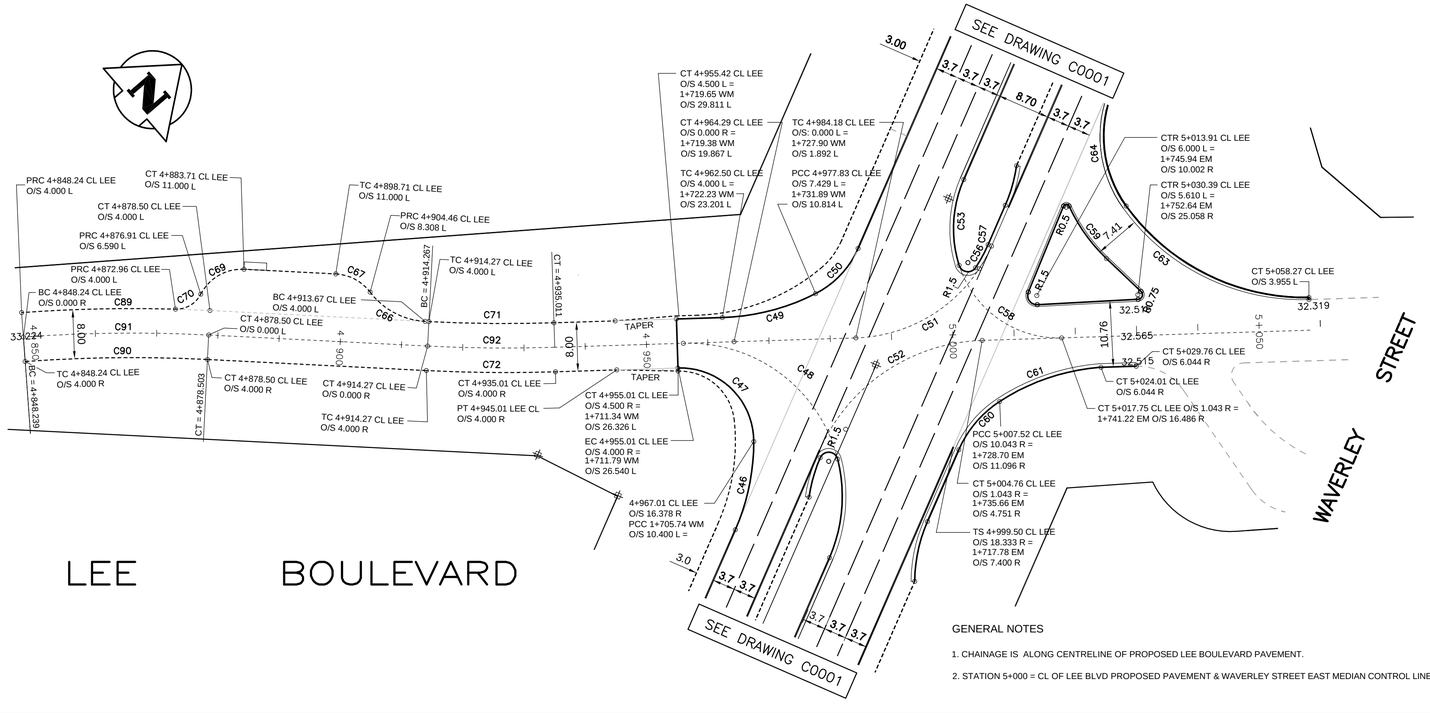

CIRCULAR CURVE DATA				
CURVE	RADIUS	TANGENT	DELTA	LENGTH
C43	29.40	2.61	10°09'44"	5.21
C45	5.00	1.57	34°54'55"	3.05
C46	36.00	7.51	23°33'23"	14.80
C47	12.00	12.38	91°48'19"	19.23
C48	20.00	31.61	115°21'43"	40.27
C49	36.00	8.05	25°12'32"	15.84
C50	15.00	5.38	39°25'47"	10.32
C51	25.00	15.82	64°38'18"	28.20
C52	30.00	18.98	64°38'27"	33.85
C53	20.00	8.43	45°42'44"	15.96
C56	24.40	2.16	10°06'16"	4.30
C57	5.00	1.57	34°54'55"	3.05
C58	17.00	11.83	69°38'49"	20.66
C59	27.50	5.36	22°03'34"	10.59
C60	18.00	6.09	37°22'29"	11.74
C61	36.00	8.73	27°15'58"	17.13
C62	5.00	2.27	48°47'10"	4.26
C63	36.00	19.13	55°57'48"	35.16
C64	20.00	11.41	59°23'45"	20.73
C65	5.00	2.27	48°47'10"	4.26
C66	12.00	5.68	50°38'59"	10.61
C67	7.50	3.55	50°38'59"	6.63
C68	1003.65	7.62	0°52'12"	15.24
C69	7.50	4.63	63°24'31"	8.30
C70	4.50	4.98	95°46'47"	7.52
C71	250.00	10.21	4°40'46"	20.42
C72	258.00	10.54	4°40'46"	21.07
C89	250.00	15.40	7°02'56"	30.76
C90	242.00	14.90	7°02'56"	29.77
C91	246.00	15.15	7°02'56"	30.26
C92	254.00	10.38	4°40'46"	20.74

GENERAL NOTES

1. CHAINAGE IS ALONG CENTRELINE OF PROPOSED LEE BOULEVARD PAVEMENT.
2. STATION 5+000 = CL OF LEE BLVD PROPOSED PAVEMENT & WAVERLEY STREET EAST MEDIAN CONTROL LINE.

APEGM
Certificate of Authorization
Wardrop Engineering Inc.
No. 195 Expiry: April 30, 2012

B.M.
ELEV.

NO.	REVISIONS	DATE	BY
B	ADDENDUM No. 1 -	11.05.24	BDK
	GENERAL REVISIONS		
A	ISSUED FOR TENDER	11.05.13	BDK

WARDROP A TETRA TECH COMPANY
PEOPLE, PASSION, PERFORMANCE. TRUSTED GLOBALLY

DESIGNED BY	bgd	CHECKED BY	
DRAWN BY	NL	APPROVED BY	
HOR. SCALE:	1 : 500	RELEASED FOR CONSTRUCTION	
VERTICAL:			
DATE	10.04.21	DATE	

PRELIMINARY DRAWING
NOT TO BE USED FOR CONSTRUCTION

CONSULTANT DRAWING NO.
0800040300-DWG-C0003-A

Winnipeg
THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION

WAVERLEY STREET
TWINNING AND ASSOCIATED WORKS

WAVERLEY STREET GEOMETRIC LAYOUT
FROM STA 2+230.00 TO STA 2+407.82
LEE BOULEVARD GEOMETRIC LAYOUT
FROM STA 4+848.24 TO STA 5+060.00

CITY DRAWING NUMBER
SHEET 3 OF 22
C0003