N

KANE AV
ROWAND AV
DAVIDSON ST
TRAILL AV
PORTAGE AV
MOUNT ROYAL CR
DEER LODGE PL
DEER LODGE PL
DEER LODGE PL
ALBANY ST
DOUGLAS PARK RD
FERRY RD
COLLEGIATE ST
ASSINIBOINE AV

VIALOUX DR
SWANN DR
WEXFORD ST
DR
COMMISSARY RD
ZOO DR
ZOO DR
BUFFALO CR
PAVILION CR
PAVILION CR
PAVILION CR
CONSERVATORY DR
CR
CRICKET DR
LOCOMOTIVE DR
PAVILION
LOCOMOTIVE DR
EAST GARDEN DR
WEST GARDEN DR
LAMONT BV
BUFFALO
CR
BUFFALO CR

ROBLIN BV
WEXFORD ST
CHALFONT RD
CORYDON AV
SHAFTESBURY BV

RESURFACE ASPHALT PATHWAY
50 mm ASPHALT OVERLAY
APPROX. 75m X 3.2 m

RESURFACE ASPHALT PATHWAY
50 mm ASPHALT OVERLAY
APPROX. 150m X 3.2 m

RECONSTRUCT ASPHALT PATHWAY
APPROX. 100m X 2.4 m
SEE ASPHALT CROSS SECTION

RECONSTRUCT AND RESURFACE
ASPHALT PATHWAY
APPROX. 100m X 2.4 m
SEE ASPHALT CROSS SECTION

RECONSTRUCT ASPHALT PATHWAY
APPROX. 350m X 2.4 m
SEE ASPHALT CROSS SECTION

ASPHALT PATHWAY CROSSECTION
NOT TO SCALE

Varies
75mm Asphalt Pathway
50mm Compacted Base (20mm Down)
150mm Compacted Crushed SubBase (50mm Down)
2 % Slope
Existing Sod
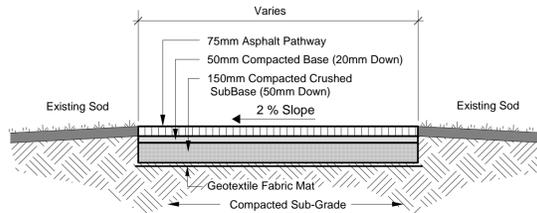Existing Sod
Geotextile Fabric Mat
Compacted Sub-Grade

Construction Notes:

1.) Also included in the scope of work but not shown on the drawings
are four (4) spot areas that will require require reconstruction. Theses ares are
located within the Zoo compound and total approximately 100 square metres.

560 mm x 864 mm DRAWING SHEET : SCALE AS NOTED