# GREENE AVENUE

| SEWER JUNCTION INFORMATION FROM SEWER VIDEO INSPECTION SEWER ID S-MA40006329 | | |
|---|---|---|
| DISTANCE FROM MH ID S-MH40005782 | | |
| DISTANCE | DIAMETER | CLOCK |
| 11.7 | 150 | 1 |
| 18.5 | 150 | 11 |
| 30.2 | 150 | 1 |
| 34.8 | 150 | 11 |
| 48.5 | 150 | 2 |
| 54.1 | 150 | 2 |
| 54.9 | 150 | 9 |
| 55.7 | 150 | 11 |
| 59.5 | 150 | 2 |
| 59.5 | 150 | 10 |
| 60.8 | 150 | 2 |
| | | |
| ****REVERSAL REQUIRED**** | | |

**120.0 OF 375 CONCRETE CS TO BE LINED**
**S-MA40006329**
**(PARTIALLY DETERIORATED)**

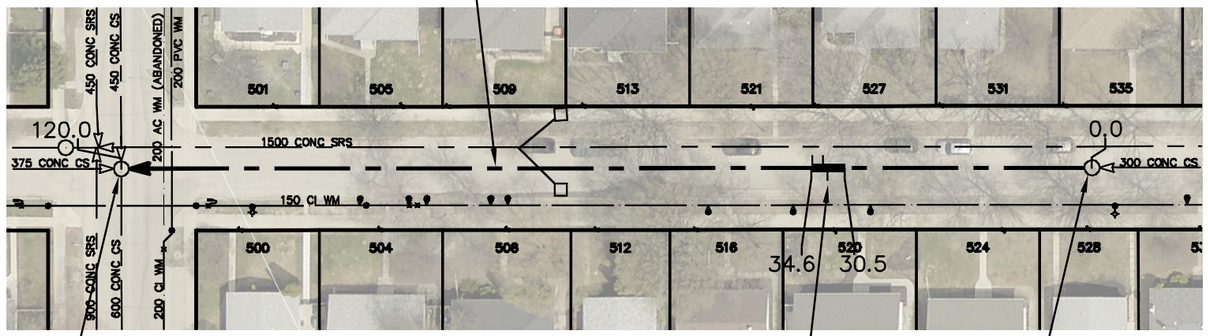


S-MH40005782
RIM 230.37
INV W 226.29
INV E 226.45
INV N 226.35
INV S 226.34

WATT ST

4.1m OF 375mm PVC
SEWER REPAIR (SD-022B)
INCLUDING 3 SERVICE CONNECTIONS
(TO BE DONE BY OTHERS)

S-MH40005763
RIM 230.25
INV W 226.80
INV E 226.81

| SEWER JUNCTION INFORMATION FROM SEWER VIDEO INSPECTION SEWER ID S-MA40006329 | | |
|---|---|---|
| DISTANCE FROM MH ID S-MH40005763 | | |
| DISTANCE | DIAMETER | CLOCK |
| 1.2 | 150 | 10 |
| 2.7 | 150 | 1 |
| 11.9 | 150 | 11 |
| 18.5 | 100 | 2 |
| 32.6 | 150 | 10 |
| 33.2 | 150 | 1 |
| 34.5 | 150 | 3 |
| 43.7 | 150 | 1 |
| 48.6 | 150 | 11 |
| | | |
| ****REVERSAL REQUIRED**** | | |

## WARNING

IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:

1) NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.

2) TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS.

SEE PROVINCIAL REGULATION 210/72 FOR DETAILS

## METRIC

WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

0.0 10.0 20.0 30.0 40.0

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE _____ DATE _____

NOTE:

LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M.
ELEV.

CONSTRUCTION COMPLETION DATE: YYYY MM DD

| NO. | REVISIONS | DATE | BY |
|---|---|---|---|
| | | | |

| | | | |
|---|---|---|---|
| DESIGNED BY | NC | CHECKED BY | SC |
| DRAWN BY | RJ | APPROVED BY | KZ |
| SCALE: HORIZONTAL | 1:750 | RELEASED FOR CONSTRUCTION | KAZ ZUREK |
| VERTICAL | | | |
| DATE | 2016 03 29 | DATE | 2016 03 24 |
| PLOT DATE: | 2016 03 29 | | |

ENGINEER'S SEAL

ORIGINAL SIGNED BY S.R.J. COURNOYER 16-03-22

CONSULTANT DRAWING NUMBER
-

BID OPPORTUNITY: 173-2016
CONTRACT NUMBER: 2

Winnipeg

# THE CITY OF WINNIPEG

WATER AND WASTE DEPARTMENT
ENGINEERING DIVISION

2015 SEWER RENEWALS
BY CIPP LINING

## GREENE AVENUE

3RD MH W OF GOLSPIE STREET TO
MH AT WATT STREET

SHEET 11 OF 47

CITY DRAWING NUMBER
11223

FILE PATH: R:\DRAWINGS\SEWER\2015 RENEWALS\RENEWALS & ASSOCIATED WORKS\Contract 2\Construction Dwg\
FILE NAME: GREENE_S-MA40006329.dwg