DOWNING STREET

95.9 OF 375 CS TO BE LINED
S–MA20010310

SEE DWG 12215

62.3m S OF S/R
NOTRE DAME AVE

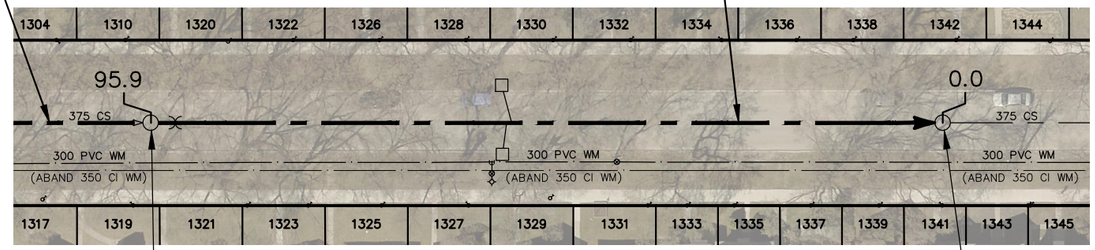

S–MH20009414
RIM 231.94
INV N 227.59
INV S 227.59

S–MH20009448
RIM 231.97
INV N 227.20
INV S 227.20

SEWER JUNCTION INFORMATION FROM SEWER VIDEO INSPECTION

SEWER ID S–MA20010310

DISTANCE FROM MH ID S–MH20009448

DISTANCE	DIAMETER	CLOCK
4.9	150	2
5.5	150	10
15.0	150	2
15.7	150	10
25.6	150	10
25.8	150	1
29.4	150	9
35.7	150	10
35.9	150	2
45.0	150	3
45.7	150	10
50.4	250	12
51.6	250	12
54.6	150	2
55.5	150	12
65.1	150	2
65.9	150	10
75.6	150	10
76.4	150	3
84.9	150	2
87.0	150	10

WARNING

IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:

1) NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.

2) TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS.

SEE PROVINCIAL REGULATION 210/72 FOR DETAILS

FOR INDEX SEE 12201

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

0.0 10.0 20.0 30.0 40.0

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE _____ DATE _____

NOTE:

LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M.
ELEV.

NO.	REVISIONS	DATE	BY

DESIGNED BY: SC
CHECKED BY: SC
DRAWN BY: AJ
APPROVED BY: KZ
SCALE: HORIZONTAL 1:750, VERTICAL
RELEASED FOR CONSTRUCTION
S. COURNOYER
DATE 2019 07 12
DATE 2019 07 12
PLOT DATE: 2019 07 12

ENGINEER'S SEAL
ORIGINAL SIGNED BY S.R.J. COURNOYER 19/07/12

CONSULTANT DRAWING NUMBER
–

Winnipeg

THE CITY OF WINNIPEG
WATER AND WASTE DEPARTMENT
ENGINEERING DIVISION

2018 SEWER MAIN RENEWALS
BY CIPP LINING
DOWNING STREET
4TH MH N YARWOOD STREET TO
1ST MH S NOTRE DAME AVENUE

SHEET 17 OF 57
CITY DRAWING NUMBER
12216

BID OPPORTUNITY: 619–2019
CONTRACT NUMBER: 5

FILE PATH: R:\DRAWINGS\SEWER\2018 RENEWALS\RENEWALS & ASSOCIATED WORKS\CONTRACT 5\CONSTRUCTION DWGS\
FILE NAME: DOWNING ST 4TH MH N YARWOOD ST TO 1ST MH S NOTRE DAME AV.dwg