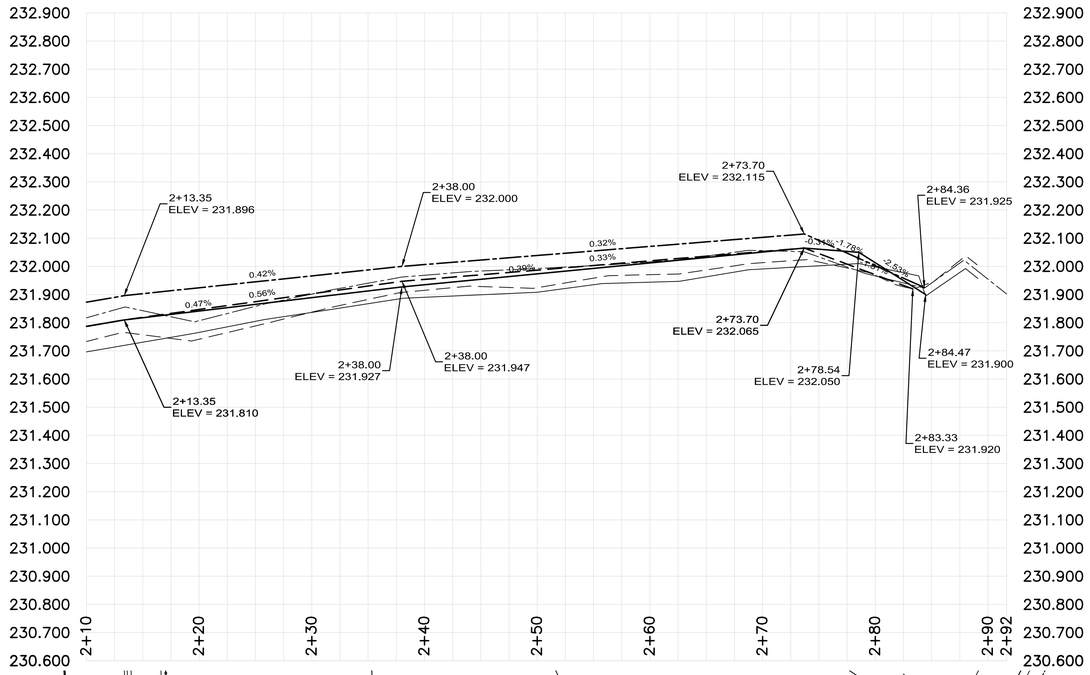

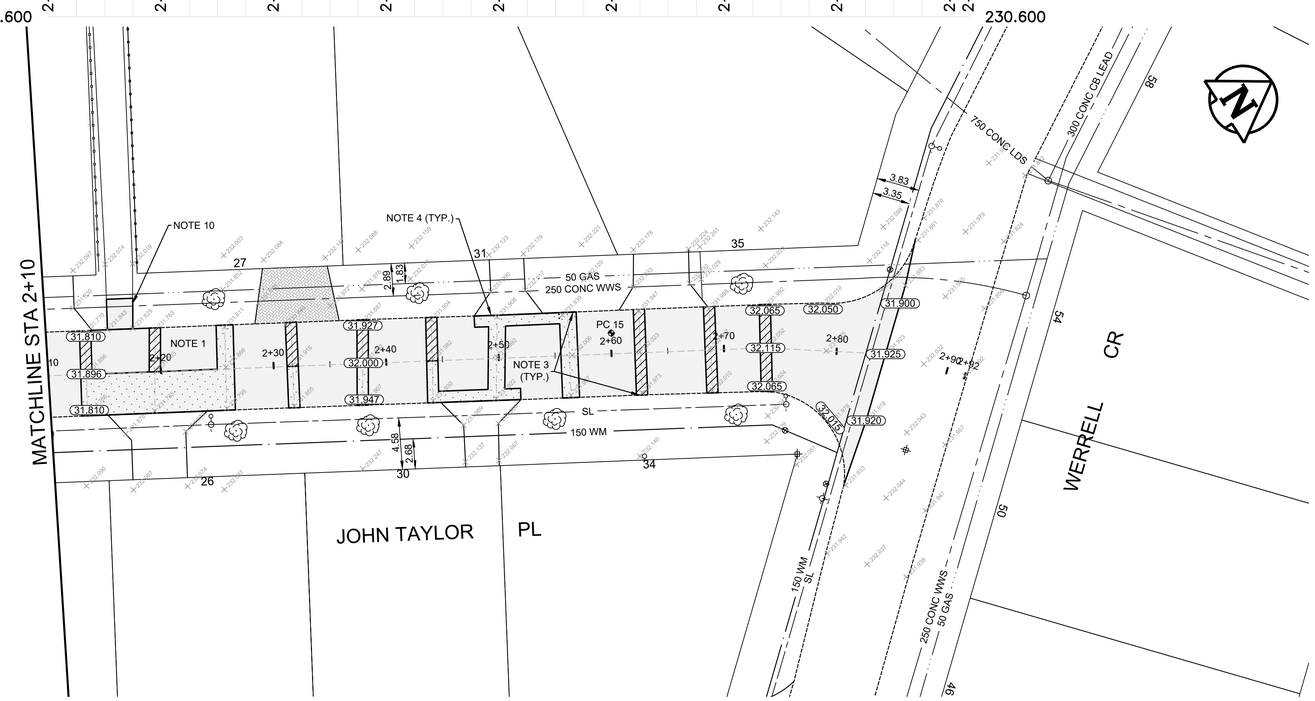

CONSTRUCTION NOTES

1. CONSTRUCT NEW ASPHALT OVERLAY (TYPE 1A)
2. PLANE EXISTING ASPHALT AND CONSTRUCT NEW ASPHALT OVERLAY (TYPE 1A)
3. RENEW EXISTING LIP CURB (SD-202A, SD-202C)
4. CONSTRUCT NEW LIP CURB (SD-202B)
5. CONSTRUCT NEW CURB RAMP (SD-229D)
6. RENEW EXISTING CONCRETE SIDEWALK (SD-228A)
7. ABANDON EXISTING CATCH PIT AS PER CW 2130
8. INSTALL NEW MOUNTABLE CURB AND GUTTER INLET C/W CATCH PIT (AP-015, AP-016, SD-023)
9. RE-GRADE PAVING STONES
10. RENEW EXISTING ASPHALT PATH

GENERAL NOTES

A. PAVEMENT DIMENSIONS ARE TO BACK OF CURB
B. ALL CURB RADII UNDER 15.0m SHALL BE MODIFIED
C. ADD 200.000m TO ALL DESIGN ELEVATION TO OBTAIN GEODETIC ELEVATIONS
D. CURB REPLACEMENT AS DIRECTED BY CONTRACT ADMINISTRATOR
E. CONTRACTOR TO CONFIRM THE LOCATION OF ALL UTILITIES/SERVICES IN THE FIELD PRIOR TO CONSTRUCTION
F. ASPHALT TIE-INS ON APPROACHES TO BE DETERMINED IN THE FIELD BY CONTRACT ADMINISTRATOR
G. PAVEMENT REPAIRS SHOWN ARE ONLY A REPRESENTATIVE SAMPLE OF THE TENDER QUANTITIES

PRELIMINARY
NOT TO BE USED FOR CONSTRUCTION

METRIC
WHOLE NUMBERS INDICATE MILLIMETERS
DECIMALIZED NUMBERS INDICATE METERS

TENDER NO. 1-2020

	HYDRANT			LDS/WWS			FENCE	
	VALVE			WATERMAIN			PAVING STONES	
	CURB STOP			GAS			CONCRETE	
	MANHOLE			TRAFFIC SIGNALS			CONCRETE SIDEWALK	
	CATCH BASIN			HYDRO/STREET LIGHT			ASPHALT	
	CURB INLET			MTS/SHAW			PARTIAL DEPTH	
	HYDRO POLE			CURB RENEWAL			PAVEMENT CORE	
	LIGHT STANDARD			PROPERTY LINE		EXISTING	LEGEND - PLAN	PROPOSED
	TRAFFIC SIGNAL POLE			CURB RAMP			WEST GUTTER	
	SURVEY BAR		231.000	ELEVATIONS	31.000		CENTER LINE	
	GEODETIC BENCH MARK			TREE			EAST GUTTER	
EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PROFILE	PROPOSED

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPR. U/G STRUCTURES COMMITTEE — DATE

NOTE:
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M. GBM XX-XXX
ELEV. 2XX.XXX

NO.	REVISIONS	DATE	BY
2.	ISSUE FOR TENDER	2020/03/16	R.W.
1.	SUBMIT FOR PLAN APPROVAL	2020/02/20	R.W.

ENGINEERING DIVISION
TECHNOLOGY SERVICES BRANCH
106 - 1155 PACIFIC AVE

DESIGNED BY	J.D.	CHECKED BY	R.W. / M.L.
DRAWN BY	J.D.	APPROVED BY	
HOR. SCALE:	1 : 250		
VERTICAL:	1 : 10		
DATE	2020/03/16		

ENGINEER'S SEAL
PROVINCE OF MANITOBA
REGISTERED ENGINEER

Winnipeg

THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT

JOHN TAYLOR PLACE
FROM **TU PELO AVENUE** TO **WERRELL CRESCENT**
ASPHALT OVERLAY AND ASSOCIATED WORKS
FROM **STA. 2+10** TO **STA. 2+85**

CITY DRAWING NUMBER
SE-20-82
SHEET 13 OF 29
2